# Recent Developments in the Use of Hierarchical Data Structures for Image Databases

Hanan Samet

Computer Science Department, University of Maryland College Park, Maryland 20742

### Abstract

An overview, with an emphasis on recent results, is presented of the use of hierarchical data structures such as quadtree for representing images. They are based the principle of recursive decomposition. The focus is on the representation of data used in image databases. There is a greater emphasis on region data (i.e., 2-dimensional shapes) and to a lesser extent on point, curvilinear, and 3dimensional data.

## INTRODUCTION


Hierarchical data structures important representation techniques in the domains of computer vision, image processing, computer graphics, robotics, and geographic information systems. They are based on the principle of recursive decomposition (similar to divide and conquer methods). The term quadtree is often used to describe this class of data structures. In this paper we focus on recent developments in the use of quadtree methods. We concentrate primarily on region data. For a more extensive treatment of this subject, see [34, 35, 41]. Our presentation is organized as follows. First, we briefly review the historical background of the origins of hierarchical data structures. Second, we discuss improvements in the performance of some key operations on region data. Next, we describe hierarchical representations for rectangle and line data, respectively, as well as give examples of their utility. Finally, we present concluding remarks in the context of a geographic information system that makes use of these concepts.

# HISTORICAL BACKGROUND

The term quadtree is used to describe a class of hierarchical data structures whose

common property is that they are based on the principle of recursive decomposition of space. They can be differentiated on the following bases: (1) the type of data that they are used to represent, (2) the principle guiding the decomposition process, and (3) the resolution (variable or not). Currently, they are used for points, rectangles, regions, curves, surfaces, and volumes. The decomposition may be into equal parts on each level (termed a regular decomposition), or it may be governed by the input. The resolution of the decomposition (i.e., the number of times that decomposition process is applied) may be fixed beforehand or it may be governed by properties of the input data.

The most common quadtree representation of data is the region quadtree. It is based on the successive subdivision of the image array into four equal-size quadrants. If the array does not consist entirely of 1's or entirely of 0's (i.e., the region does not cover the entire array), it is then subdivided into quadrants, subquadrants, etc., until blocks are obtained (possibly single pixels) that consist entirely of 1's or entirely of 0's. Thus the region quadtree can be characterized as a variable resolution data structure. As an example, consider the region shown in Figure 1a which is represented by the 23 by 23 binary array in Figure 1b. Observe that the 1's correspond to picture elements (termed pixels) that are in the region and the 0's correspond to picture elements that are outside the region. The resulting blocks for the array of Figure 1b are shown in Figure 1c. This process is represented by a tree of degree 4. The root node corresponds to the entire array. Each son of a node represents a quadrant (labeled in order NW, NE, SW, SE) of the region represented by that node. The leaf nodes of the tree correspond to those blocks for which no further subdivision is necessary. A leaf node is said to be BLACK or WHITE,

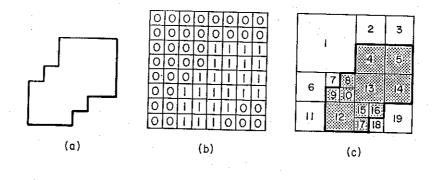

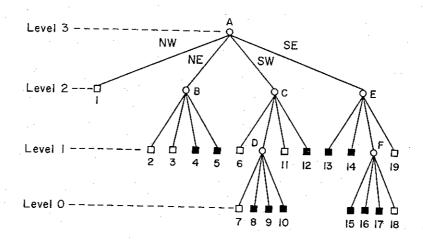


Figure 1. A region, its binary array, its maximal blocks, and the corresponding quadtree. (a) Region. (b) Binary array. (c) Block decomposition of the region in (a). Blocks in the region are shaded. (d) Quadtree representation of the blocks in (c).

depending on whether its corresponding block is entirely inside or entirely outside of the represented region. All non-leaf nodes are said to be GRAY. The quadtree representation for Figure 1c is shown in Figure 1d.

Quadtrees can also be used to represent non-binary images. In this case, we apply the same merging criteria to each color. For example, in the case of a landuse map, we simply merge all wheat growing regions, and likewise for corn, rice, etc. This is the approach taken by Samet et al. [37].

Unfortunately, the term quadtree has taken on more than one meaning. The region quadtree, as shown above, is a partition of space into a set of squares whose sides are all a power of two long. This formulation is due to Klinger [19] who used the term Q-tree [20], whereas Hunter [14] was the first to use the term quadtree in such a context. A similar partition of space into rectangular quadrants, also termed a quadtree, was used by Finkel

and Bentley [7]. It is an adaptation of the binary search tree to two dimensions (which can be easily extended to an arbitrary number of dimensions). It is primarily used to represent multidimensional point data.

The origin of the principle of recursive decomposition is difficult to ascertain. Below, in order to give some indication of the uses of the quadtree, we briefly trace some of its applications to image data. Morton [27] used it as a means of indexing into a geographic database. Warnock [47] implemented a hidden surface elimination algorithm using a recursive decomposition of the picture area. The picture area is repeatedly subdivided into successively smaller rectangles while searching for areas sufficiently simple to be displayed. Horowitz and Pavlidis [13] used the quadtree as an initial step in a "split and merge" image segmentation algorithm.

The pyramid of Tanimoto and Pavlidis [46] is a close relative of the region quadtree. It is a multiresolution representation which is

an exponentially tapering stack of arrays, each one-quarter the size of the previous array. It has been applied to the problems of feature detection and segmentation. In contrast, the region quadtree is a variable resolution data structure.

Quadtree-like data structures can also used to represent images in three dimensions and higher. The octree [14, 16, 26, 31 data structure is the three-dimensional analog of the quadtree. It is constructed in the following manner. We start with an image in the form of a cubical volume and recursively subdivide it into eight congruent disjoint cubes (called octants) until blocks are obtained of a uniform color or a predetermined level of decomposition is reached. Figure 2a is an example of a simple three-dimensional object whose raster octree block decomposition is given in Figure  $^{2b}$ and whose representation is given in Figure 2c.

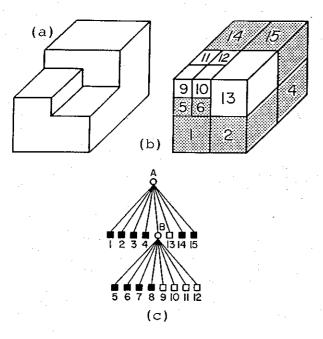


Figure 2. (a) Example three-dimensional object; (b) its octree block decomposition; and (c) its tree representation.

One of the motivations for the development of hierarchical data structures such as the quadtree is a desire to save space. The original formulation of the quadtree encodes it as a tree structure that uses pointers. This requires additional overhead to encode the internal nodes of the tree. In order to further reduce the space requirements, two other approaches have been proposed. The first

treats the image as a collection of leaf nodes where each leaf is encoded by a base 4 number termed a locational code, corresponding to a sequence of directional codes that locate the leaf along a path from the root of the quadtree. It is analogous to taking the binary representation of the x and y coordinates of a designated pixel in the block (e.g., the one at the lower left corner) and interleaving them (i.e., alternating the bits for each coordinate). It is difficult to determine the origin of this method (e.g., [1, 9, 21, 27]). The second, termed a DF-expression, represents the image in the form of a traversal of the nodes of its quadtree [17]. It is very compact as each node type can be encoded with two bits. However, it is not easy to use when random access to nodes is desired. Recently, Samet and Webber [40] showed that for a static collection of nodes, an efficient implementation of the pointer-based representation is often more economical spacewise than  $\mathbf{a}$ locational representation. This is especially true for images of higher dimension.

Nevertheless, depending the particular implementation of the quadtree we may not necessarily save space (e.g., in many cases a binary array representation may still be more economical than a quadtree). However, the effects of the underlying hierarchical aggregation on the execution time of the algorithms are more important. Most quadtree algorithms are simply preorder traversals of the quadtree and thus their execution time is generally a linear function of the number of nodes in the quadtree. A key to the analysis of the execution time of quadtree algorithms is the Quadtree Complexity Theorem [14, 15] which states that:

For a quadtree of depth q representing an image space of  $2^q \times 2^q$  pixels where these pixels represent a region whose perimeter measured in pixel-widths is p, then the number of nodes in the quadtree cannot exceed  $16 \cdot q - 11 + 16 \cdot p$ .

Since under all but the most pathological cases (e.g., a small square of unit width centered in a large image), the region perimeter exceeds the base 2 logarithm of the width of the image containing the region, the Quadtree Complexity Theorem means that the size of the quadtree representation of a region is linear in the perimeter of the region.

The Quadtree Complexity Theorem holds for three-dimensional data [25] where perimeter is replaced by surface area, as well as higher dimensions for which it is stated as follows.

The size of the k-dimensional quadtree of a set of k-dimensional objects is proportional to the sum of the resolution and the size of the (k-1)-dimensional interfaces between these objects.

The Quadtree Complexity Theorem also directly impacts the analysis of the execution time of algorithms. In particular, most algorithms that execute on a quadtree representation of an image instead of an array representation have an execution time that is proportional to the number of blocks in the image rather than the number of pixels. In its most general case, this means that the application of a quadtree algorithm to a problem in d-dimensional space executes in time proportional to the analogous array-based algorithm in the (d-1)-dimensional space of the surface of the original d-dimensional image. Therefore, quadtrees dimension-reducing devices.

### ALGORITHMS USING QUADTREES

In this section we describe how a number of basic image processing algorithms can be implemented using region quadtrees. In particular, we discuss point and object location, set operations, and quadtree construction.

#### Point and Object Location

The simplest task to perform on region data is to determine the color of a given pixel. In the traditional array representation, this is achieved by exactly one array access. In the region quadtree, this requires searching the quadtree structure. The algorithm starts at the root of the quadtree and uses the values of the x and y coordinates of the center of its block to determine which of the four subtrees contains the pixel. For example, if both the x and y coordinates of the pixel are less than the x and y coordinates of the center of the root's block, then the pixel belongs in the southwest subtree of the root. This process is performed recursively until a leaf is reached. It requires the transmission of parameters so that the center of the block corresponding to the root of the subtree currently being processed can be

calculated. The color of that leaf is the color of the pixel. The execution time for the algorithm is proportional to the level of the leaf node containing the desired pixel.

The object-location operation is closely related to the point-location task. In this case, the x and y coordinates of the location of a pointing device (e.g., representing a mouse, tablet, lightpen, etc.) must be translated into the name of a nearby appropriate object (e.g., the nearest region corresponding to a specified feature). The leaf corresponding to the point is located as described above. If the leaf does not contain the feature, then we must investigate other leaf nodes.

Finding nearest leaf node the containing a specific feature (also known as the nearest neighbor problem) is achieved by top-down recursive algorithm. Initially, at each level of the recursion, we explore the subtree that contains the location of the pointing device, say P. Once the leaf containing P has been found, the distance from P to the nearest feature in the leaf is calculated (empty leaf nodes have a value of infinity). Next, we unwind the recursion and, as we do so, at each level we search the subtrees that represent regions that overlap a circle centered at P whose radius is the distance to the closest feature that has been found so far. When more than one subtree must be searched, the subtrees representing regions nearer to P are searched before the subtrees that are further away (since it is possible that one of them may contain the desired feature thereby making it unnecessary to search the subtrees that are further away). For example, suppose that the features are points. Consider Figure 3 and the task of finding the nearest neighbor of P in node 1. If we visit nodes in the order NW, NE, SW. SE, then as we unwind for the first time, we visit nodes 2 and 3 and the subtrees of the eastern brother of 1. Once we visit node 4, there is no need to visit node 5 since node 4 contained A. Nevertheless, we still visit node 6 which contains point B which is closer than A, but now there is no need to visit node 7. Unwinding one more level finds that due to the distance between P and B, there is no need to visit nodes 8, 9, 10, 11, and 12. However, node 13 must be visited as it could contain a point that is closer to P than B.

same color as the appropriate active node, then do nothing. Otherwise, insert the largest possible node for which this is the first (i.e., upper leftmost) pixel, and (if it is not a 1×1 pixel node) add it to the set of active nodes. Remove any active nodes for which this is the last (lower right) pixel.

Table 1 is a trace of the values of the active nodes as the pixels that lead to the creation of nodes (or their removal from the active list of nodes) are processed. Each row in the table indicates the node that has become active (as well as its size), or the nodes that have been removed from the set of active nodes. In addition, the active nodes are tabulated according to their level. The pixel identifier (a,b) means that the pixel is in row a and column b relative to an origin at the upper left corner of the image. Figure 4 illustrates some of the nodes created during the building process by using their names to label the pixel that caused their creation. Figures 5a-d indicate in greater detail some of the steps in the construction of the quadtree.

Table 1. Trace of the active nodes as the quadtree for Figure 1a is built.					
Pixel	Action	Size	Active Nodes by Level		
			3	2	1 1
(0,0)	insert WHITE node A	8×8	Α		
(2,4)	insert BLACK node B	2×2	l A		B
(2,6)	insert BLACK node C	2×2	A		BC
(3,5)	remove B from active		A	1 .	C .
(3,7)	remove C from active	1	A		i
(4,3)	insert BLACK node D	1×1	A		
(4,4)	insert BLACK node E	4×4	A	E	
(5,2)	insert BLACK node F	1×1	A	E	
(5,3)	insert BLACK node G	1×1	A	E	1
(6,2)	insert BLACK node H	2×2	A	E	H
(6,6)	insert WHITE node l	2×2	A	E	HI
(7,3)	remove H from active		A	ΕI	
(7,5)	insert WHITE node J	1×1	A	EI	1
(7,7)	remove I. E. A from active	1			1




Figure 4. Correlation between some of the nodes of the quadtree corresponding to Figure 1 and the pixels that led to their creation.

When the first pixel of the array is processed, the entire quadtree is represented by a single WHITE node (node A in Figure 5a). No other insertions occur while processing rows 0 and 1. When the first BLACK pixel (2,4) is processed, node B of Figure 5a becomes active. The insertion of node B causes node A to be split and its NE son is split again. When BLACK pixel (2,5) is processed, node B will be located in the active node table since it is the smallest active node containing that pixel. When BLACK pixel (2,6) is processed, node C of Figure 5b becomes active, since only active WHITE node A contains it at that point. As row 3 is processed, nodes B and C are deactivated when their lower right pixels are pixels (3,5) $\mathbf{and}$ processed (i.e., respectively). Pixel (4,3) causes the insertion of node D which resulted in two node splitting operations. When pixel (4,4) is processed, node E is inserted as shown in Figure 5c. The nodes previously labeled B and C are not active. Similarly, pixel-sized node D at (4,3) is not active since it contains no unprocessed pixels. Therefore, nodes A and E are the only active Pixels (5,2) and (5,3) cause the insertion of nodes F and G. Node H becomes active after processing pixel (6,2). Pixel (6,6) is WHITE and since the smallest node containing it had been BLACK, a WHITE node, I, has been inserted as well as made active (see Figure 5d). When processing pixel (6,7) we find that three active nodes (i.e., A, E, and I) contain it, with the smallest being node I. Pixel (7,3) causes node H to be removed from the set of active nodes. Pixel (7,5) results in the insertion of node J. Since pixel (7,7) is the lower rightmost pixel in the image, it causes the removal of all active nodes from the active node list (i.e., nodes I, E, and A). The final result of the quadtree building process is shown in Figure 4.

Use of the predictive quadtree construction algorithm for  $512 \times 512$  images resulted in execution time speedups of factors as high as 40 and usually at least one order of magnitude [43]. This is a very important result because it means that like all other quadtree operations, the execution time of building a quadtree is also proportional to the complexity of the image. In other words, the building time is competitive with the time necessary to perform a set operation.

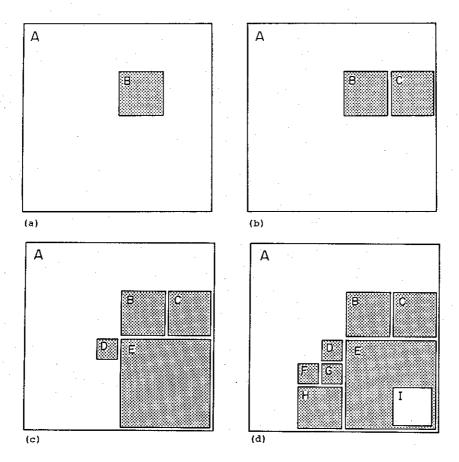


Figure 5. Intermediate states of the quadtree as the predictive algorithm is used to build the quadtree corresponding to Figure 1. (a) State after processing pixel (2,4); (b) state after processing pixel (2,6); (c) state after processing pixel (4,4); (d) state after processing pixel (6,6).

#### RECTANGLE DATA

The rectangle data type lies somewhere between the point and region data types. Rectangles are often used to approximate other objects in an image for which they serve as the minimum rectilinear enclosing object. For example, bounding rectangles can be used in cartographic applications to approximate objects such as lakes, forests, hills, etc. [24]. In such a case, the approximation gives an indication of the existence of an object. Of course, the exact boundaries of the object are also stored; but they are only accessed if greater precision is needed. For such applications, the number of elements in the collection is usually small, and most often the sizes of the rectangles are of the same order of magnitude as the space from which they are drawn. Rectangles are also used in VLSI design rule checking as a model of chip components for the analysis of their proper placement. Again, the rectangles serve as minimum enclosing objects. In this application the size of

the collection is quite large (e.g., millions of components) and the sizes of the rectangles are several orders of magnitude smaller than the space from which they are drawn. Regardless of the application, the representation of rectangles involves two principal issues. The first is how to represent the individual rectangles and the second is how to organize the collection of the rectangles.

The representation that is depends heavily on the problem environment. If the environment is static, then frequently the solutions are based on the use of the plane-sweep paradigm [30] which usually yields optimal solutions in time and space. However, the addition of a single object to the database forces the re-execution of the algorithm on the entire database. We are primarily interested in dynamic problem environments. The data structures that are chosen for the collection of the rectangles are differentiated by the way in which each rectangle is represented. One representation reduces each rectangle to a point in a higher dimensional space, and then

treats the problem as if we have a collection of points. This is the approach of Hinrichs and Nievergelt [11, 12]. Each rectangle is a Cartesian product of two one-dimensional intervals where each interval is represented by its centroid and extent. The collection of rectangles is, in turn, represented by a Grid File [29] which is a hierarchical data structure for points. The second representation is region-based in the sense that the subdivision of the space from which the rectangles are drawn depends on the physical extent of the rectangle - not just one point. Representing the collection of rectangles, in turn, with a tree-like data structure has the advantage that there is a relation between the depth of node in the tree and the size of the rectangle(s) that are associated with it. Interestingly, some of the region-based solutions make use of the same data structures that are used in the solutions based on the plane-sweep paradigm. In the remainder of this section we shall give an example of a pair of region-based representations.

The MX-CIF quadtree of Kedem [18] (see also Abel and Smith [1]) is a region-based representation where each rectangle is quadtree the with corresponding to the smallest block which contains it in its entirety. Subdivision ceases whenever a node's block contains rectangles. Alternatively, subdivision can also cease once a quadtree block is smaller than a predetermined threshold size. This threshold is often chosen to be equal to the expected size of the rectangle [18]. For example, Figure 6 is the MX-CIF quadtree for a collection of rectangles. Note that rectangle F occupies an entire block and hence it is associated with the block's father. Also rectangles can be associated with both terminal and non-terminal nodes.

It should be clear that more than one rectangle can be associated with a given enclosing block and thus often we find it useful to be able to differentiate between them. Kedem proposes to do so in the following manner. Let P be a quadtree node with centroid (CX,CY), and let S be the set of rectangles that are associated with P. Members of S are organized into two sets according to their intersection (or collinearity of their sides) with the lines passing through the centroid of P's block - i.e., all members of S that intersect the line x = CX form one set and all members of S that intersect the line

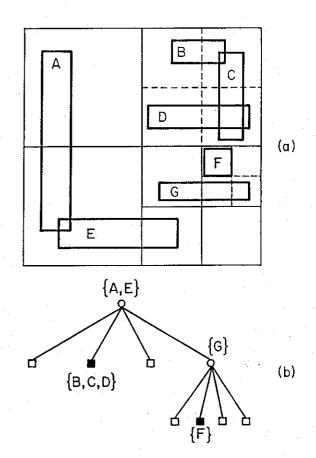


Figure 6. MX-CIF quadtree. (a) Collection of rectangles and the block decomposition induced by the MX-CIF quadtree. (b) The tree representation of (a).

y = CY form the other set. If a rectangle intersects both lines (i.e., it contains the centroid of P's block), then we adopt the convention that it is stored with the set associated with the line through x = CX. These subsets are implemented as binary trees (really tries) which in actuality are onedimensional analogs of the MX-CIF quadtree. For example, Figure 7 illustrates the binary tree associated with the y axes passing through the root and the NE son of the root of quadtree of MX-CIF Figure Interestingly, the MX-CIF quadtree is a twodimensional analog of the interval tree [5, 23] which is a data structure that is used to support optimal solutions based on the planesweep paradigm to some rectangle problems.

The R-tree [10] is a hierarchical data structure that is derived from the B-tree [4]. Each node in the tree is a d-dimensional rectangle corresponding to the smallest rectangle that encloses its son nodes which are also d-dimensional rectangles. The leaf nodes

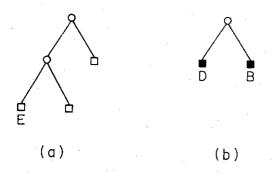


Figure 7. Binary trees for the y axes passing through (a) the root of the MX-CIF quadtree in Figure 6 and (b) the NE son of the root of the MX-CIF quadtree in Figure 6.

are the actual rectangles in the database. Often the nodes correspond to disk pages and thus the parameters defining the tree are chosen so that a small number of nodes is visited during a spatial query. Note that rectangles corresponding to different nodes may overlap. Also, a rectangle may be spatially contained in several nodes, yet it can only be associated with one node. This means that a spatial query may often require several nodes to be visited before ascertaining the presence or absence of a particular rectangle. This problem can be alleviated by using the R+-tree [6, 42] for which all bounding rectangles (i.e., at levels other than the leaf) are nonoverlapping. This means that a given rectangle will often be associated with several bounding rectangles. In this case, retrieval time is sped up at the cost of an increase in the height of the tree. Note that B-tree performance guarantees are not valid for the R+-tree - i.e., pages are not guaranteed to be 50% full without very complicated record update procedures.

#### LINE DATA

The region quadtree is an approach to region representation that is based on a description of the region's interior. In this section we focus on a representation that specifies the boundaries of regions. We concentrate on use of the PM quadtree family [28, 39] (see also edge-EXCELL [45]) in the representation of collections of polygons (termed polygonal maps). There are a number of variants of the PM quadtree. These variants are either vertex-based or edge-based. They are all built by applying the principle of repeatedly breaking up the collection of vertices and edges

(forming the polygonal map) until obtaining a subset that is sufficiently simple so that it can be organized by some other data structure.

The PM quadtrees of Samet and Webber [39] are vertex-based. We illustrate the PM<sub>1</sub> quadtree. It is based on a decomposition rule that stipulates that partitioning occurs as long as a block contains more than one line segment unless the line segments are all incident at the same vertex which is also in the same block (e.g., Figure 8). Samet, Shaffer, and Webber [38] show how to compute the maximum depth of the PM<sub>I</sub> quadtree for a polygonal map in a limited, but typical, environment. They consider a polygonal map whose vertices are drawn from a grid (say  $2^n \times 2^n$ ), and do not permit edges to intersect at points other than the grid points (i.e., vertices). In such a case, the depth of any leaf node is bounded from above by 4n+1. This enables a determination of the maximum amount of storage that will be necessary for each node. A similar representation has been devised for three-dimensional images [2, 3, 8]. The decomposition criteria are such that no node contains more than one face, edge, or vertex unless the faces all meet at the same vertex or are adjacent to the same edge. For example, Figure 9b is a  $PM_1$  octree decomposition of the object in Figure 9a. This representation is quite useful since its space requirements for polyhedral objects significantly smaller than those conventional octree.

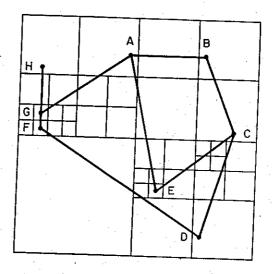


Figure 8. Example PM<sub>1</sub> quadtree.

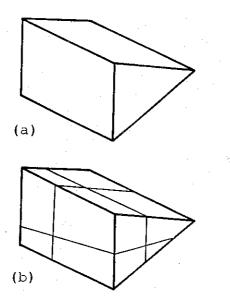


Figure 9. (a) Example three-dimensional object; and (b) its corresponding PM<sub>1</sub> octree.

The PMR quadtree [28] is an edgebased variant of the PM quadtree. It makes use of a probabilistic splitting rule. A node is permitted to contain a variable number of line segments. A line segment is stored in a PMR quadtree by inserting it into the nodes corresponding to all the blocks that it intersects. During this process, the occupancy of each node that is intersected by the line segment is checked to see if the insertion causes it to exceed a predetermined splitting threshold. If the splitting threshold is exceeded, then the node's block is split once, and only once, into four equal quadrants. On the other hand, a line segment is deleted from a PMR quadtree by removing it from the nodes corresponding to all the blocks that it intersects. During this process, the occupancy of the node and its siblings is checked to see if the deletion causes the total number of line segments in them to be less than the predetermined splitting threshold. If the splitting threshold exceeds the occupancy of the node and its siblings, then they are merged and the merging process is reapplied to the resulting node and its siblings. Notice the asymmetry between the splitting and merging rules.

Members of the PM quadtree family can be easily adapted to deal with fragments that result from set operations such as union and intersection so that there is no data degradation when fragments of line segments are subsequently recombined. Their use yields

an exact representation of the lines - not an approximation. To see how this is achieved, let us define a q-edge to be a segment of an edge of the original polygonal map that either spans an entire block in the PM quadtree or extends from a boundary of a block to a vertex within the block (i.e., when the block contains a vertex). Each q-edge is represented by a pointer to a record containing the endpoints of the edge of the polygonal map of which the qedge is a part [28]. The line segment descriptor stored in a node only implies the presence of the corresponding q-edge - it does not mean that the entire line segment is present as a lineal feature. The result is a consistent representation of line fragments since they are stored exactly and thus they can be deleted and reinserted without worrying about errors arising from the roundoffs induced by approximating their intersection with the borders of the blocks through which they pass.

#### CONCLUDING REMARKS

The use of hierarchical data structures in image databases enables the focussing of computational resources on the interesting subsets of data. Thus there is no need to expend work where the payoff is small. Although many of the operations for which they are used can often be performed equally as efficiently, or more so, with other data structures, hierarchical data structures are attractive because of their conceptual clarity and ease of implementation. When the hierarchical data structures are based on the principle of regular decomposition, we have the added benefit of a spatial index. All features, be they regions, points, rectangles, lines, volumes, etc., can be represented by maps which are in registration. In fact, such a system has been built [37] for representing geographic information. In this case, the quadtree is implemented as a collection of leaf nodes where each leaf node is represented by its locational code. The collection is in turn represented as a B-tree. There are leaf nodes corresponding to region, point, and line data.

The disadvantage of quadtree methods is that they are shift sensitive in the sense that their space requirements are dependent on the position of the origin. However, for complicated images the optimal positioning of the origin will usually lead to little improvement in the space requirements. The

process of obtaining this optimal positioning is computationally expensive and is usually not worth the effort [22].

The fact that we are working in a digitized space may also lead to problems. For example, the rotation operation is not generally invertible. In particular, a rotated square usually cannot be represented accurately by a collection of rectilinear squares. However, when we rotate by 90°, then the rotation is invertible. This problem arises whenever one uses a digitized representation. Thus it is also common to the array representation.

# ACKNOWLEDGMENTS

This work was supported by the National Science Foundation under Grant DCR-8605557. I would like to acknowledge the many valuable discussions that I have had with Randal C. Nelson, Azriel Rosenfeld, Clifford A. Shaffer, Markku Tamminen, and Robert E. Webber.

# REFERENCES

- 1. D.J. Abel and J.L. Smith, A data structure and algorithm based on a linear key for a rectangle retrieval problem, Computer Vision, Graphics, and Image Processing 24, 1(October 1983), 1-13.
- 2. D. Ayala, P. Brunet, R. Juan, and I. Navazo, Object representation by means of nonminimal division quadtrees and octrees, ACM Transactions on Graphics 4, 1(January 1985), 41-59.
- 3. I. Carlbom, I. Chakravarty, and D. Vanderschel, A hierarchical data structure for representing the spatial decomposition of 3-D objects, IEEE Computer Graphics and Applications 5, 4(April 1985), 24-31.
- 1. D. Comer, The Ubiquitous B-tree, ACM Computing Surveys 11, 2(June 1979), 121-137.
- 5. H. Edelsbrunner, Dynamic rectangle intersection searching, Institute for Information Processing Report 47, Technical University of Graz, Graz, Austria, February 1980.

- 6. C. Faloutsos, T. Sellis, and N. Roussopoulos, Analysis of object oriented spatial access methods, *Proceedings of the SIGMOD Conference*, San Francisco, May 1987, 426-439.
- 7. R.A. Finkel and J.L. Bentley, Quad trees: a data structure for retrieval on composite keys, Acta Informatica 4, 1(1974), 1-9.
- 8. K. Fujimura and T.L. Kunii, A hierarchical space indexing method, *Proceedings of Computer Graphics'85*, Tokyo, 1985, T1-4, 1-14.
- 9. I. Gargantini, An effective way to represent quadtrees, Communications of the ACM 25, 12(December 1982), 905-910.
- 10. A. Guttman, R-trees: a dynamic index structure for spatial searching, Proceedings of the SIGMOD Conference, Boston, June 1984, 47-57.
- 11. K. Hinrichs, The grid file system: implementation and case studies of applications, Ph.D. dissertation, Institut fur Informatik, ETH, Zurich, Switzerland, 1985.
- 12. K. Hinrichs and J. Nievergelt, The Grid File: a data structure designed to support proximity queries on spatial objects, Proceedings of the WG'83 (International Workshop on Graphtheoretic Concepts in Computer Science), M. Nagl and J. Perl, Eds., Trauner Verlag, Linz, Austria, 1983, 100-113.
- 13. S.L. Horowitz and T. Pavlidis, Picture segmentation by a tree traversal algorithm, Journal of the ACM 23, 2(April 1976), 368-388.
- 14. G.M. Hunter, Efficient computation and data structures for graphics, Ph.D. dissertation, Department of Electrical Engineering and Computer Science, Princeton University, Princeton, NJ, 1978.
- 15. G.M. Hunter and K. Steiglitz, Operations on images using quad trees, *IEEE Transactions on Pattern Analysis and Machine Intelligence* 1, 2(April 1979), 145-153.
- 16. C.L. Jackins and S.L. Tanimoto, Oct-trees and their use in representing three-dimensional objects, Computer Graphics and Image Processing 14, 3(November 1980), 249-270.

- 17. E. Kawaguchi and T. Endo, On a method of binary picture representation and its application to data compression, *IEEE Transactions on Pattern Analysis and Machine Intelligence 2*, 1(January 1980), 27-35.
- 18. G. Kedem, The Quad-CIF tree: a data structure for hierarchical on-line algorithms, Proceedings of the Nineteenth Design Automation Conference, Las Vegas, June 1982, 352-357.
- 19. A. Klinger, Patterns and Search Statistics, in *Optimizing Methods in Statistics*, J.S. Rustagi, Ed., Academic Press, New York, 1971, 303-337.
- 20. A. Klinger and C.R. Dyer, Experiments in picture representation using regular decomposition, Computer Graphics and Image Processing 5, 1(March 1976), 68-105.
- 21. A. Klinger and M.L. Rhodes, Organization and access of image data by areas, *IEEE Transactions on Pattern Analysis and Machine Intelligence 1*, 1(January 1979), 50-60.
- 22. M. Li, W.I. Grosky, and R. Jain, Normalized quadtrees with respect to translations, Computer Graphics and Image Processing 20, 1(September 1982), 72-81.
- 23. E.M. McCreight, Priority search trees, SIAM Journal on Computing 14, 2(May 1985), 257-276.
- 24. T. Matsuyama, L.V. Hao, and M. Nagao, A file organization for geographic information systems based on spatial proximity, Computer Vision, Graphics, and Image Processing 26, 3(June 1984), 303-318.
- 25. D. Meagher, Octree encoding: a new technique for the representation, The manipulation, and display of arbitrary 3-d objects by computer, Technical Report IPL-TR-80-111, Image Processing Laboratory, Rensselaer Polytechnic Institute, Troy, New York, October 1980.
- 26. D. Meagher, Geometric modeling using octree encoding, Computer Graphics and Image Processing 19, 2(June 1982), 129-147.
- 27. G.M. Morton, A computer oriented geodetic data base and a new technique in file

- sequencing, IBM Ltd., Ottawa, Canada, 1966.
- 28. R.C. Nelson and H. Samet, A consistent hierarchical representation for vector data, Computer Graphics 20, 4(August 1986), pp. 197-206 (also Proceedings of the SIGGRAPH'86 Conference, Dallas, August 1986).
- 29. J. Nievergelt, H. Hinterberger, and K.C. Sevcik, The Grid File: an adaptable, symmetric multikey file structure, ACM Transactions on Database Systems 9, 1(March 1984), 38-71.
- 30. F.P. Preparata and M.I. Shamos, Computational Geometry: An Introduction, Springer-Verlag, New York, 1985.
- 31. D.R. Reddy and S. Rubin, Representation of three-dimensional objects, CMU-CS-78-113, Computer Science Department, Carnegie-Mellon University, Pittsburgh, April 1978.
- 32. H. Samet, An algorithm for converting rasters to quadtrees, *IEEE Transactions on Pattern Analysis and Machine Intelligence 3*, 1(January 1981), 93-95.
- 33. H. Samet, Neighbor finding techniques for images represented by quadtrees, Computer Graphics and Image Processing 18, 1(January 1982), 37-57.
- 34. H. Samet, The quadtree and related hierarchical data structures, ACM Computing Surveys 16, 2(June 1984), 187-260.
- 35. H. Samet, Spatial Data Structures: Quadtrees, Octrees, and Other Hierarchical Methods, to appear, 1989.
- 36. H. Samet, A. Rosenfeld, C.A. Shaffer, R.C. Nelson, Y-G. Huang, and K. Fujimura, Application of hierarchical data structures to geographic information systems: phase IV, Computer Science TR-1578, University of Maryland, College Park, MD, December 1985.
- 37. H. Samet, A. Rosenfeld, C.A. Shaffer, and R.E. Webber, A geographic information system using quadtrees, *Pattern Recognition* 17, 6 (November/December 1984), 647-656.
- 38. H. Samet, C.A. Shaffer, and R.E. Webber, Digitizing the plane with cells of non-uniform

- size, Information Processing Letters 24, 6(April 1987), 369-375.
- 39. H. Samet and R.E. Webber, Storing a collection of polygons using quadtrees, ACM Transactions on Graphics 4, 3(July 1985), 182-222 (also Proceedings of Computer Vision and Pattern Recognition 83, Washington, DC, June 1983, 127-132).
- 40. H. Samet and R.E. Webber, A comparison of the space requirements of multi-dimensional quadtree-based file structures Computer Science TR-1711, University of Maryland, College Park, MD, September 1986.
- 41. H. Samet and R.E. Webber, Hierarchical data structures and algorithms for computer graphics. Part I. Fundamentals, IEEE Computer Graphics and Applications 8, 3(May 1988), 48-68.
- 42. T. Sellis, N. Roussopoulos, and C. Faloutsos, The R<sup>+</sup>-tree: a dynamic index for multi-dimensional objects, Computer Science TR-1795, University of Maryland, College Park, MD, February 1987.
- 43. C.A. Shaffer and H. Samet, Optimal quadtree construction algorithms, Computer Vision, Graphics, and Image Processing 37, 3(March 1987), 402-419.
- 44. M. Shneier, Calculations of geometric properties using quadtrees, Computer Graphics and Image Processing 16, 3(July 1981), 296-302.
- 45. M. Tamminen, The EXCELL method for efficient geometric access to data, Acta Polytechnica Scandinavica, Mathematics and Computer Science Series No. 34, Helsinki, 1981.
- 46. S. Tanimoto and T. Pavlidis, A hierarchical data structure for picture processing, Computer Graphics and Image Processing 4, 2(June 1975), 104-119.
- 47. J.L. Warnock, A hidden surface algorithm for computer generated half tone pictures, Computer Science Department TR 4-15, University of Utah, Salt Lake City, June 1969.