

CMSC 216  
Introduction to Computer Systems  
Lecture 5  
Intro. to C, completed,  
Arrays and Strings  
Larry Herman & Alan Sussman

## Notes

- Project 1 questions?
  - due Monday, 2/13
  - public tests available in public Grace directory, and submit server open
- Read Chapters 8 and 9 of Reek

Chapter 5, Reek

## OPERATORS

## Lvalues and Rvalues

- An rvalue is anything that can appear on the right side of an assignment statement
  - virtually any expression
- An lvalue is anything that can appear on the left side of an assignment statement
  - values that represent a place to store a value
- The right and left sides of an assignment statement are treated differently
  - right hand side is a value, left hand side is a location to store a value (an address)

## Implicit type conversion

- Arithmetic operators require their operands to be of the same type to perform the operation
- `int` is actually “smallest” type used
- There is a hierarchy of types (Reek, § 5.4.2)
  - floating-point numbers over integers
  - wide over small
  - unsigned over signed
- Operation result is of the new type
- What to do? `2000000000 * 3`

## Mixed-type assignments

- RHS is converted to LHS type before storage
- Can mean either promotion or truncation

```
char a, b = 'b', c = 'c';
float f = 2.25, g = 4.9999;
unsigned int i, j;
unsigned char ch;
a = b + c; /* a = 98 + 99 = 197? */
i = f; j = g; /* i: 2; j: 4 */
i = ch = 0xabcd; /* i: 0xcd; ch: 0xcd */
```

Parts of Chapters 8 and 9, Reek

## ARRAYS AND STRINGS

## Arrays in C

- Much like Java (or many other languages)
  - All elements are the same type
  - Elements indexed by the subscript operator `[]`
- Sizes must be known at compile time (constant expressions only) and are static
- Can't assign to arrays (can initialize, though)
- Can use `==` and `!=`, but meaning isn't what you might think (wait until pointers)
- Syntax for creating arrays is slightly different
  - C: `int a[5];` creates array of 5 ints
  - Java: `int[] a = new int[5];` creates array of 5 ints

## Array initialization

- Supply a list of values in braces, separated by commas:  
`int a[5] = {1, 1, 2, 3, 5};`
- Occurs when array is first created
  - when this occurs depends on the array's storage class
  - also means you can't initialize after declaration
  - and you can't initialize with variable expressions
- Zeroes pad the array when initializer is short
- Use of an initializer allows size to be omitted
  - can't omit size otherwise when declaring local variables (parameters are an exception, though)
- Initializers with excess elements cause errors

## Array initialization examples

```
int a[3]      = {1, 4, 7};
int b[5]      = {2, 8};
int c[]       = {3, 9, 5, 2 + 6};
int d[1000]   = {0};
```

These are illegal (assuming `i` is an `int`):

```
int w[i];
int x[];
int y[4] = {2 * i, 3 + 2};
int z[5]; /* this alone is OK */
z = {1, 1, 2, 3, 5};
```

## Parameters in C

- You can use parameters as variables, but why is it safe?
- In C, variables are passed by value – a copy is passed

```
int abs_value(int x) {
    if (x < 0)
        x = -x;
    return x;
}

int main() {
    int n = -17, a;
    a = abs_value(n);
    printf("%d %d\n", a, n);
    return 0;
}
```

## Array parameters

- Array parameters act as if they were passed by reference (as we'll discuss later)
- If a function modifies elements of an array parameter, the array passed in **is** modified

```
void function(int a[]);
...
```

```
int array[10];
function(array);
```
- Sizes for array parameters are ignored – only types matter
  - so `"void function(int a[12397]);"` is equivalent to the above prototype

## Array parameters, cont.

- You generally have to pass array size along with the array
- Functions only know about the elements of an array – the size of an array parameter isn't known

```
void multiply_array(int factor, int arr[], int ct) {
    int i;
    for (i = 0; i < ct; i++)
        arr[i] *= factor;
}

int main() {
    int a[] = {1, 2, 3};
    multiply_array(5, a, 3);
    printf("[%d, %d, %d]\n", a[0], a[1], a[2]);
    return 0;
}
```

## Use of symbolic constants

- #define preprocessor directive  
#define name value
- All occurrences of **name** in the source file are replaced by **value**
- Used to define constants for things such as array sizes and other values to improve program maintainability

```
#define ARR_SIZE 3
int main() {
    int i, a[ARR_SIZE] = {1, 2, 3};
    multiply_array(5, a, ARR_SIZE);
    printf("[%d", a[0]);
    for (i = 1; i < ARR_SIZE; i++)
        printf(", %d", a[i]);
    printf("]\n");
    return 0;
}
```

## Strings in C

- There is no String type in C
- In C, a string is defined as a sequence of characters that is followed by a byte with the value zero
  - often called: "zero byte", "null byte", "NUL"
  - represented as the character literal `'\0'`
  - "null byte" is NOT the same thing as "null pointer"
- Since arrays are contiguous in memory, and **chars** are all one byte in size, we can use arrays of **chars** to hold strings
- **printf()** format specifier for strings is **%s**

## String initialization


- Because character arrays are so closely related to strings, they can be initialized with string literals as well as standard array initializers
- But don't forget that the null byte needs to be stored as well
- Example:

```
char str[6] = "hello";
```

|     |   |   |   |   |   |    |
|-----|---|---|---|---|---|----|
| str | h | e | l | l | o | \0 |
|-----|---|---|---|---|---|----|

## More examples of string initialization

```
char a[] = "hello";  
char b[10] = "Maryland";  
char c[1024] = "";
```

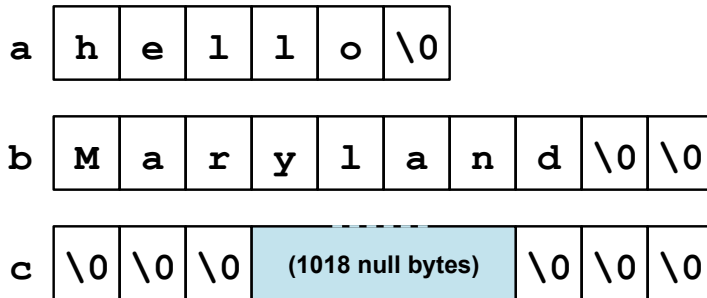

## Basic string library functions

- C has many different functions for working with strings; to use these, you must **#include <string.h>**
- We're only covering a small subset here; if you ever want to see all of them, more information can be found in the string.h man page
  - Note: the prototypes there are slightly different than what we'll be covering here, because we haven't covered pointers yet, but functionality is the same

## String library functions, cont.

- String length:  
**size\_t strlen(char str[]);**
  - returns the length of the string pointed to by the string passed in as a parameter
  - string length is the number of characters in the string, **not counting** the null byte
  - Example:

```
char str[] = "ice cream";  
printf("\"%s\": %d chars\n", str, strlen(str));
```

**Output:**  
"ice cream": 9 chars

## A possible **strlen()** implementation

```
size_t strlen(char str[]) {  
    size_t i;  
    for (i = 0; str[i]; i++)  
        ;  
    return i;  
}
```

- The integer type **size\_t** is defined in the standard library header file, and is big enough to hold the size of any type
- What would happen if you passed an uninitialized character array into this function?

## String library functions, cont.

- Comparing strings:

```
int strcmp(char s1[], char s2[]);
```

– works just the same as `s1.compareTo(s2)` did in Java:

- returns negative number if `s1` is less than `s2`
- returns positive number if `s1` is greater than `s2`
- returns 0 if `s1` and `s2` match character for character

– Example:

```
if (strcmp(str1, "hello") == 0)  
    printf("str1 is \"hello\"\\n");
```