

Translation by Iterative Collaboration between Monolingual Users

Chang Hu^{1,2}, Benjamin B. Bederson^{1,2} and Philip Resnik^{1,3,4}

¹Department of Computer Science, ²Human-Computer Interaction Lab,

³Institute for Advanced Computer Studies, ⁴Department of Linguistics,

University of Maryland

changhu@cs.umd.edu

ABSTRACT

In this paper we describe Monotrans, a new iterative translation process designed to leverage the massive number of online users who have minimal or no bilingual skill.

Categories and Subject Descriptors

H.5.m. [Information interfaces and presentation (e.g., HCI)]:
Miscellaneous.

Keywords

Monolingual, translation, translation interface, human computation, distributed human computation, wisdom of crowds, crowdsourcing, machine translation.

1. INTRODUCTION

An enormous potential exists for solving certain classes of computational problems through rich collaboration between humans and computers. Take translation for example. Humans alone are expensive and can be surprisingly slow; despite significant recent advances, machine translation (MT) remains a crucial problem and fully automated high quality translation remains a distant dream for the vast majority of the world's language pairs. Usable translation quality can sometimes be obtained by statistical MT systems, but only for a minority of language pairs, and only in use cases where sufficient training text is available and the material being translated is reasonably similar to the material on which the system was trained.

Using the Web to reach non-professional human translators holds promise, and there has been some initial success with distributing translation over a crowd of bilingual users. However, compared to the total user population, the potential translator population is still small. For example, while Wikipedia currently has about 75,000 active contributors, there are fewer than 800 translators. With a much larger number of potential human helpers who speak only the source or target language, but not both, it seems natural to ask whether some combination of machine translation with volunteer monolingual speakers could result in high quality translation.

We propose a rethinking of the translation problem to bring

Permission to make digital or hard copies of all or part of this work for personal or classroom use is granted without fee provided that copies are not made or distributed for profit or commercial advantage and that copies bear this notice and the full citation on the first page. To copy otherwise, or republish, to post on servers or to redistribute to lists, requires prior specific permission and/or a fee.

KDD-HCOMP'10, July 25, 2010, Washington, DC, USA. Copyright 2010 ACM 978-1-4503-0222-7 ...\$10.00

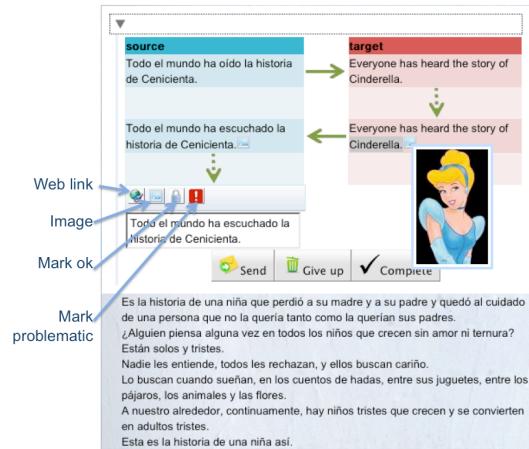


Figure 1 In this prototype UI showing a page, a sentence is expanded, with an image attached to a word.

together translation technology and human-computer interaction, producing a framework for translation that will exploit imperfect technology and limited human abilities in tandem to achieve capabilities neither can achieve alone.

The core of this framework is Monotrans, an iterative protocol in which the human participants work together to make sense of machine translations, and introduce redundant information to make their intended meanings clearer (see Figure 2). This protocol makes it possible to detect and correct some translation errors, and to at least identify some passages that have errors even if they are not correctable given the available information. For example, "has cheeseburger" is a detectable error, even if it is not clear whether the intended meaning was "has cheeseburgers" or "have a cheeseburger". Back-translating a refinement and carrying along redundant information, e.g. a picture of multiple cheeseburgers, might help convey which of those alternatives the English speaker guessed, presenting the opportunity for confirmation or further correction.

2. RESEARCH PROTOTYPE

We built a research prototype as a multi-user web application (Figure 1). When a user logs in, the UI displays a book page in the user's language. Every sentence in the page is displayed with the most up-to-date translation hypothesis (or corresponding back-translation). The user can navigate through all available pages with navigation controls, or expand a sentence translation to edit it.

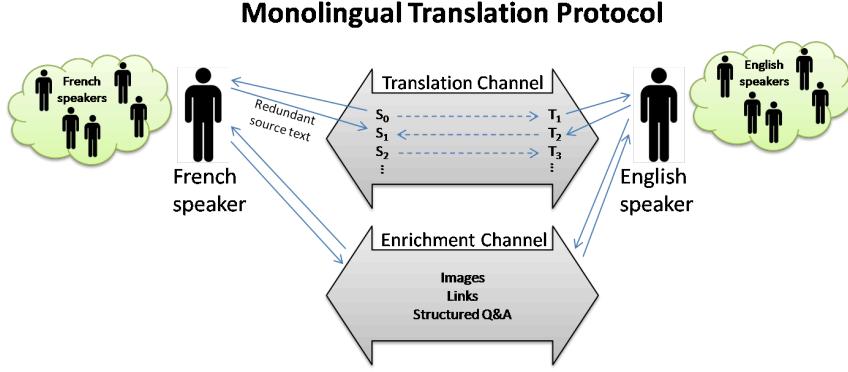


Figure 2 Round-trip protocol. Dashed arrows show machine translation and solid arrows show human editing.

When a sentence is expanded, the UI shows the most up-to-date translation hypothesis with all previous translation hypotheses of this sentence and a rich editor where the sentence can be edited and annotated.

The rich editor currently includes the following elements for the enrichment channel, aimed at enhancing redundancy and communicating shared context.

- Image annotations
- Web link annotations
- Annotation of correct parts of a sentence
- Annotation of incorrect parts of a sentence

Word level alignments necessary to perform annotation projection can be obtained from our own machine translation engines. Also, some machine translation services make word alignment information publicly available to researchers along with the translation hypotheses. The Google Translate Research API (open to university research projects) is one such example.

3. PRELIMINARY RESULTS

We used Monotrans to translate part of a children’s book from Russian to Chinese. Chinese and Russian are commonly spoken languages in the world. However, they make good experimental candidates because they are very different from the perspective of linguistic typology.

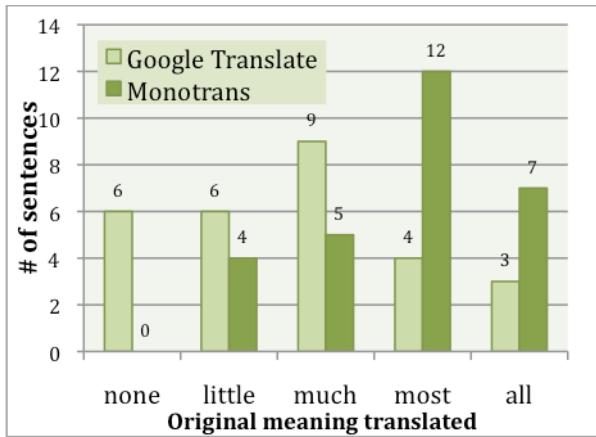


Figure 3 Number of sentences in each adequacy category, rated by a professional translator.

In the experiments, two Russian speakers and four Chinese speakers formed four pairs to use the prototype. (One Russian speaker participated three times, with different content.) The participants were all native speakers of one language and had no knowledge of the other. They were all computer-literate and fluent speakers of English. While most of the participants were computer science students and researchers, none of them work in the area of machine translation directly, and none of them were familiar with the details of this project. They were not linguists or linguistic students.

Participants worked on 6 pages (a total of 44 sentences) and finished translating 28 of them. This works out to approximately seven sentences per hour between any given pair of participants. It is about five times faster than the earlier “Wizard of Oz” experiment. With a standard rating procedure, sixteen of the 28 sentences translated with the prototype were rated as fully fluent and nineteen sentences of the 28 were rated as mostly or fully translated, by a professional translator not connected with the project.

The shift in adequacy is especially notable among these results. Completely inadequate MT outputs (none of the meaning preserved) dropped from 6 to 0. This means that the protocol helped the target language participants understand at least some of the meaning even when the original MT output quality was especially low and they had little to go on. In a coarse-grained way of thinking, if the adequacy rating could be categorized so that {none, little}=bad and {most, all}=good, then there would be a drop in bad (meaning) from 12 to 4 out of the 28, and there would be an increase in good from 7 to 19 of 28. That represents a factor of roughly 3 in each of the desired directions.

4. ACKNOWLEDGMENTS

This work is supported by the National Science Foundation.

5. REFERENCES

- [1] Chang Hu. Collaborative Translation by Monolingual Users. *CHI Extended Abstracts 2009*: 3105-3108
- [2] Chang Hu, Benjamin B. Bederson and Philip Resnik. Translation by Iterative Collaboration between Monolingual Users. *Graphics Interface 2010, Ottawa, Canada*