

# CMSC 132: Object-Oriented Programming II

---

## Java Inner Classes



**Department of Computer Science**  
**University of Maryland, College Park**

# Overview

## ■ **Classes**

- **Top-level vs. inner & nested**

## ■ **Inner classes**

- **Iterator example**
- **Used inside outer class**

## ■ **Anonymous inner classes**

- **Syntax**
- **Uses for GUIs**

## ■ **Nested classes**

# Java Classes

## ■ Top level classes

- Declared inside package
- Visible throughout package, perhaps further
- Normally declared in their own file
  - Public classes must be defined in their own file
  - Not required for other classes

## ■ Inner and nested classes

- Declared inside class (or method)
- Normally used only in **outer** (enclosing) class
  - Can have wider visibility

# Inner / Nested Classes

- Inner class
- Nested class
- Anonymous inner class
- Examples

```
public class MyOuterClass {  
    public class MyInnerClass { ... }  
    static public class MyNestedClass { ... }  
    Iterator iterator( ) { return new Iterator( ) { ... } }  
}
```

# Inner Classes

## ■ Description

- Class defined in scope of another class
- May be named or anonymous

## ■ Useful property

- Outer & inner class **can directly access** each other's fields & methods (even if private)

# Inner Classes


## ■ Example

```
public class OuterClass {  
    private int x;  
    private class InnerClass {  
        private int y;  
        void foo( ) { x = 1; }           // access private field  
    }  
    void bar( ) {  
        InnerClass ic = new InnerClass( );  
        ic.y = 2;                       // access private field  
    }  
}
```

# Inner Class Link To Outer Class

## ■ Inner class **instance**

- Has association to an instance of outer class
- Must be instantiated with an enclosing instance
- Is **tied** to outer class object at moment of creation (can not be changed)

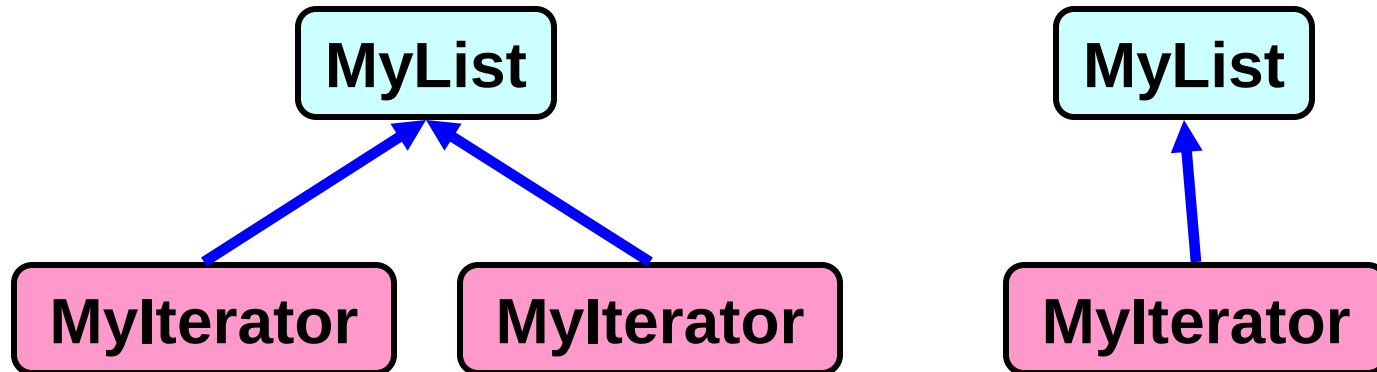

# Inner Classes

## ■ Useful for

### ■ Private helper classes

- Logical grouping of functionality

- Data hiding

### ■ Linkage to outer class

- Inner class object **tied** to outer class object

## ■ Examples

- **Iterator** for Java Collections

- **ActionListener** for Java GUI widgets

# Iterator Example

## ■ **MyList**

```
public class MyList {  
    private Object [ ] a;  
    private int size;  
}
```

## ■ **Want to make MyList implement Iterable**

- **Skipping generic types at the moment**
- **Need to be able to return an Iterator**

# (Problematic) MyIterator Design

```
public class MyIterator implements Iterator {  
    private MyList list;  
    private int pos;  
    MyIterator(MyList list) {  
        this.list = list;  
        pos = 0;  
    }  
    public boolean hasNext() {  
        return pos < list.size;  
    }  
    public Object next() {  
        return list.a[pos++];  
    }  
    ...  
}
```

# MyIterator Design

## ■ Problems

- Need to maintain reference to MyList
- Need to access **private** data in MyList

## ■ Solution

- Define MyIterator as inner class for MyList
  - Instance of MyIterator tied to instance of MyList
  - MyIterator methods can access private MyList fields
- MyIterator objects can iterate through elements of MyList

# (Successful) MyIterator Design

## ■ Code

```
public class MyList implements Iterable {  
    private Object [ ] a;  
    private int size;  
    public Iterator iterator() {  
        return new MyIterator();  
    }  
    public class MyIterator implements Iterator {  
        private int pos = 0;  
        public boolean hasNext() { return pos < size; }  
        public Object next()      { return a[pos++]; }  
        ...  
    }  
}
```

# Instantiating Inner Class

- How to access instance of inner class?
- Common gimmick
  - Outer class method returns instance of inner class
  - Used by Java Collections Library for Iterators
- Example code

```
public class MyList {  
    public class IC implements Iterator { ... }  
    public Iterator iterator() {  
        return new IC();           // creates instance of IC  
    }  
}  
MyList m = new MyList();  
Iterator it = m.iterator();
```

# Using Inner Class *Inside* Outer Class

- Assume class OC defines an inner class IC
- Inside methods of OC, just use IC normally
  - Use `a = new IC( );` to create instances of IC
    - `a` is associated with the specific IC object referenced by `this`

# Using Inner Class *Inside* Outer Class

## ■ Code

```
public class OC {           // outer class
    private int x = 2;
    private class IC {      // inner class
        private int y = 4;
        private int getSum() { return x + y; }
    }
    void bar( ) {
        IC z = new IC( );   // create new IC assoc. w/ this
        z.getSum( );        // treat z like normal object
    }
}
```

# Accessing Outer Scope

## ■ Code

```
public class OC {                // outer class
    int x = 2;
    private class IC {           // inner class
        int x = 6;
        private void getX() {    // inner class method
            int x = 8;
            System.out.println( x );           // prints 8
            System.out.println( this.x );       // prints 6
            System.out.println( OC.this.x );    // prints 2
        }
    }
}
```

# Method Invocations

- **Method invocations on inner class**
  - **Can be transparently redirected to outer instance**
  
- **Resolving method call on unspecified object**
  1. **See if method can be resolved on inner object**
  2. **If not, see if method can be resolved on corresponding instance of outer object**
  3. **If nested multiple levels, keep on looking**

# Anonymous Inner Class

## ■ Description

- Inner class without name
- Defined where you create an instance of it
  - In the middle of a method
  - Returns an instance of anonymous inner class
- Useful if the only thing you want to do with an inner class is create instances of it in one location

## ■ Syntax

```
new ReturnType( ) {    // unnamed inner class
    body of class...  // implementing ReturnType
};
```

# Anonymous Inner Class

## ■ Code

```
public class MyList {  
    public Iterator iterator() {  
        return new Iterator() { // unnamed inner class  
            ... // implementing Iterator  
        };  
    }  
}  
  
MyList m = new MyList();  
Iterator it = m.iterator();
```

# Example Anonymous Inner Classes

## ■ Use

```
new Foo( ) {  
    public int one() { return 1; }  
    public int add(int x, int y) { return x + y; }  
};
```

- To define an anonymous inner class that
  - Extends class Foo / implements interface Foo
  - Defines methods one & add

# MyList With *Explicit* Inner Class

## ■ Code

```
public class MyList implements Iterable {  
    private Object [ ] a;  
    private int size;  
    public Iterator iterator( ) {  
        return new Mylterator( );  
    }  
    public class Mylterator implements Iterator {  
        private int pos = 0;  
        public boolean hasNext( ) { return pos < size; }  
        public Object next( )      { return a[pos++]; }  
    }  
}
```

# MyList With *Anonymous* Inner Class

## ■ Code

```
public class MyList implements Iterable {  
    private Object [ ] a;  
    private int size;  
    public Iterator iterator( ) {  
        return new Iterator ( ) {  
            private int pos = 0;  
            public boolean hasNext( ) { return pos < size; }  
            public Object next( )      { return a[pos++]; }  
        } ;  
    }  
}
```

# Support For Java GUIs

- **Graphical User Interface (GUI)**
  - **Java AWT & Swing libraries**
- **Event-driven programming model**
  - **Components may generate events**
    - **E.g., `ActionEvent`, `KeyEvent`, `MouseEvent`**
  - **Requires **event listeners** to handle event**
- **Event listeners frequently implemented using anonymous classes**
  - **Used only in one location**
  - **Implements event listener interfaces**

# Using Inner Classes in GUIs

```
javax.swing.SwingUtilities.invokeLater(new Runnable() {  
    public void run() {  
        createAndDisplayGUI();  
    }  
});
```

```
button.addActionListener (new ActionListener() {  
    public void actionPerformed (ActionEvent evt) {  
        System.out.println("Button pushed");  
    }  
});
```

# Nested Class

## ■ Description

- Similar to inner class, but declared as **static** class
- No link to an instance of the outer class
- Can directly access outer class fields & methods
- Useful if inner class object
  - Associated with different outer class objects
  - Survives longer than outer class object

## ■ Example

```
class LinkedList {  
    static class Node { Node next; }  
    Node head;  
}
```

# Summary of Inner / Nested Classes

- **All inner / nested classes**
  - Defined inside another class
  - Can access private members of enclosing class
- **Inner class**
  - Each instance of an inner class is transparently associated with an instance of the outer class
- **Anonymous inner class**
  - Unnamed inner class defined & used in one place
- **Nested class**
  - Defined as static class