


FIRSTNAME, LASTNAME (PRINT IN UPPERCASE):

STUDENT ID (e.g. 123456789):

INSTRUCTIONS:

Assume the following min-heap.

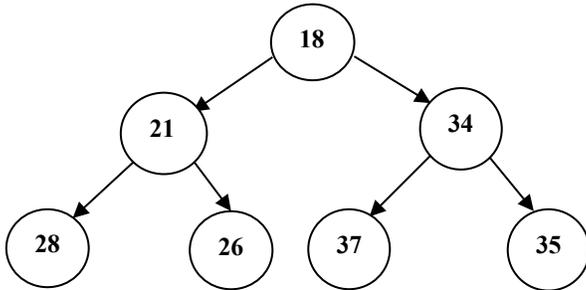

1. (4 pts) Draw the heap (as a tree) that would result from inserting **19** in the heap above.

2. (4 pts) Draw the heap (as a tree) that would result from a `removeMin` operation in the heap above (the original, not the one from #1 with **19** in it).

Assume the code below with all necessary import statements.

```
public class BinarySearchTree<K extends Comparable<K>> {  
    private class Node {  
        private K key;  
        private Node left, right;  
  
        private Node(K key) {  
            this.key = key;  
        }  
    }  
}   
  
private Node root;  
  
public static void main(String[] args) {  
    BinarySearchTree<Integer> tree = new BinarySearchTree<Integer>();  
  
    tree.add(40);  
    tree.add(20);  
    tree.add(60);  
    tree.add(10);  
    tree.add(30);  
    tree.add(50);  
    tree.add(70);  
    tree.add(71);  
  
    System.out.println(tree.makeList(20));  
    System.out.println(tree.makeList(30));  
    System.out.println(tree.makeList(40));  
    System.out.println(tree.makeList(35));  
}   
  
public ArrayList<ArrayList<K>> makeList(K target)  
{  
    ArrayList<ArrayList<K>> myList= new ArrayList<ArrayList<K>> ();  
    myList.add(new ArrayList<K> ());  
    myList.add(new ArrayList<K> ());  
  
    makeListAux(myList, root, target);  
  
    return myList;  
}   
  
private void makeListAux ( ArrayList<ArrayList<K>> myList, Node rootAux, K target)  
{  
  
    //code this one  
}   
  
private void //code your 2nd Recursive auxiliary to be called by makeListAux  
{  
  
    //code this one  
}   
  
/*Assume code for add to add nodes to the BST as seen in class; smaller add to left,  
larger add to right, no duplicate keys allowed*/  
}
```

Driver Output

```
[[71, 70, 60, 50, 40, 30, 20, 10], [10, 20, 30]]  
[[71, 70, 60, 50, 40, 30, 20, 10], [30]]  
[[71, 70, 60, 50, 40, 30, 20, 10], [10, 20, 30, 40, 50, 60, 70, 71]]  
[[71, 70, 60, 50, 40, 30, 20, 10], []]
```

`makeListAux` will populate the first `ArrayList` in the parameter `myList` with the keys in the tree in descending order (no sort calls allowed, your traversal should be able to achieve this). If the `target` value is in the tree, the second `ArrayList` in the parameter `myList` will be populated by the keys of the subtree rooted at `target` in ascending order. If the `target` value is not there, just leave the second `ArrayList` in the parameter `myList` empty (see last output).

You can have a second recursive auxiliary method of your choice to be called by `makeListAux`. No loops in your code and you may only use the following **library method** calls in all the code you write.

`compareTo` of your comparable

`boolean add(E e)` Appends the specified element to the end of this `ArrayList`.

`E get(int index)` Returns the element at the specified position in this list.

Directory ID:

