

CMSC 132: Object-Oriented Programming II

Threads in Java



Department of Computer Science
University of Maryland, College Park

Problem

- **Multiple tasks for computer**
 - Draw & display images on screen
 - Check keyboard & mouse input
 - Send & receive data on network
 - Read & write files to disk
 - Perform useful computation (editor, browser, game)
- **How does computer do everything at once?**
 - Multitasking
 - Multiprocessing


Multitasking (Time-Sharing)

■ Approach


- Computer does some work on a task
 - Computer then quickly switch to next task
 - Tasks managed by operating system (scheduler)
- Computer **seems** to work on tasks concurrently
- Can improve performance by reducing waiting

Multitasking Can Aid Performance

■ Single task

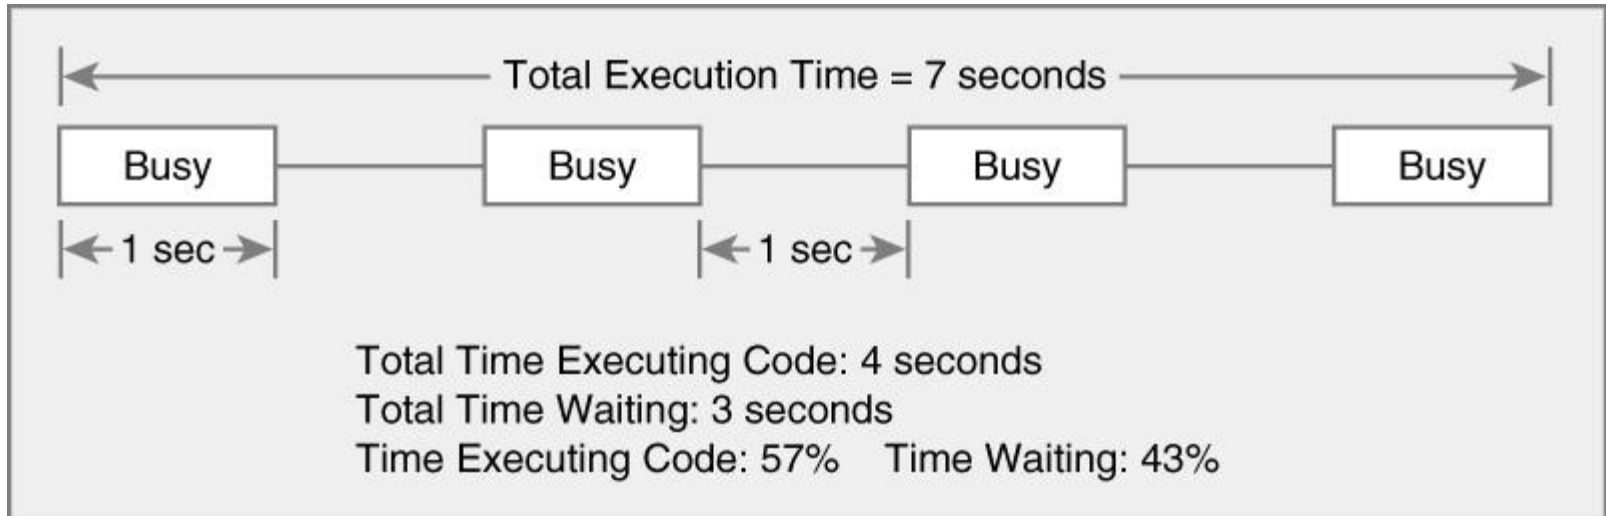

■ Two tasks

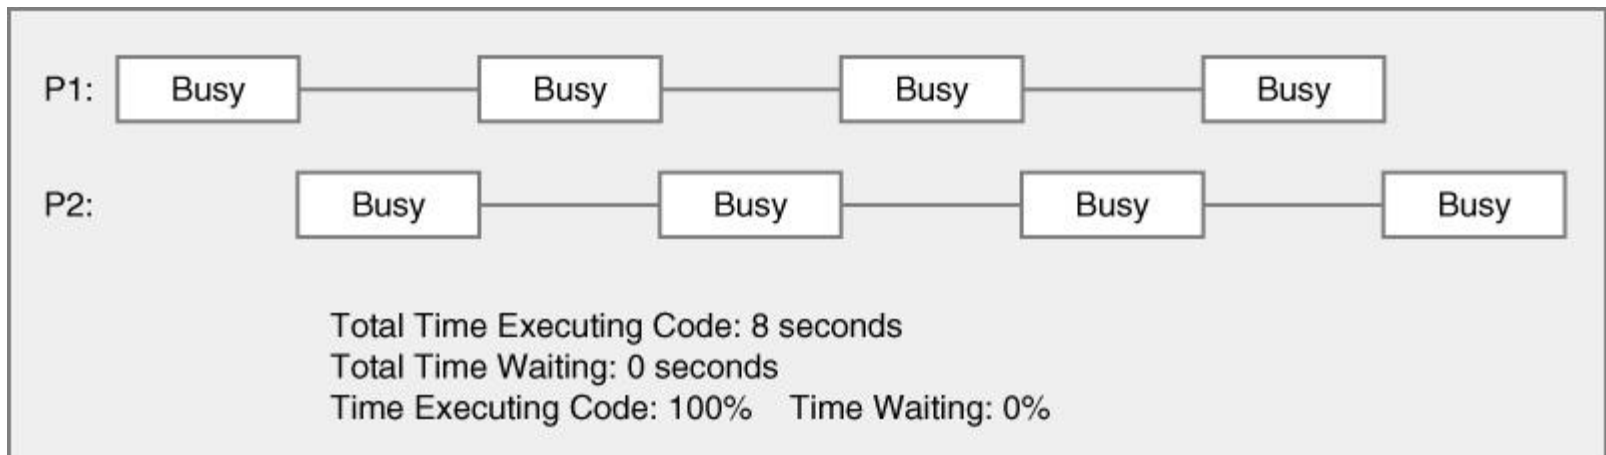

Multiprocessing (Multithreading)

■ Approach

- Multiple processing units (**multiprocessor**)
- Computer works on several tasks in parallel
- Performance can be improved



Dual-core
AMD
Athlon X2



32
processor
Pentium
Xeon



4096
processor
Cray X1



Beowulf computer
cluster (Borg, 52-
node cluster used
by McGill University
Image/Info from
Wikipedia)

Perform Multiple Tasks Using...

1. Process

- Definition – executable program loaded in memory
- Has own **address space**
 - Variables & data structures (in memory)
- Each process may execute a different program
- Communicate via operating system, files, network
- May contain multiple threads

Perform Multiple Tasks Using...

2. Thread


- Definition – sequentially executed stream of instructions
- Shares address space with other threads
- Has own **execution context**
 - Program counter, call stack (local variables)
- Communicate via shared access to data
- Multiple threads in process execute **same** program
- Also known as “lightweight process”

Motivation for Multithreading

1. Captures logical structure of problem

- May have concurrent interacting components
- Can handle each component using separate thread
- Simplifies programming for problem

■ Example

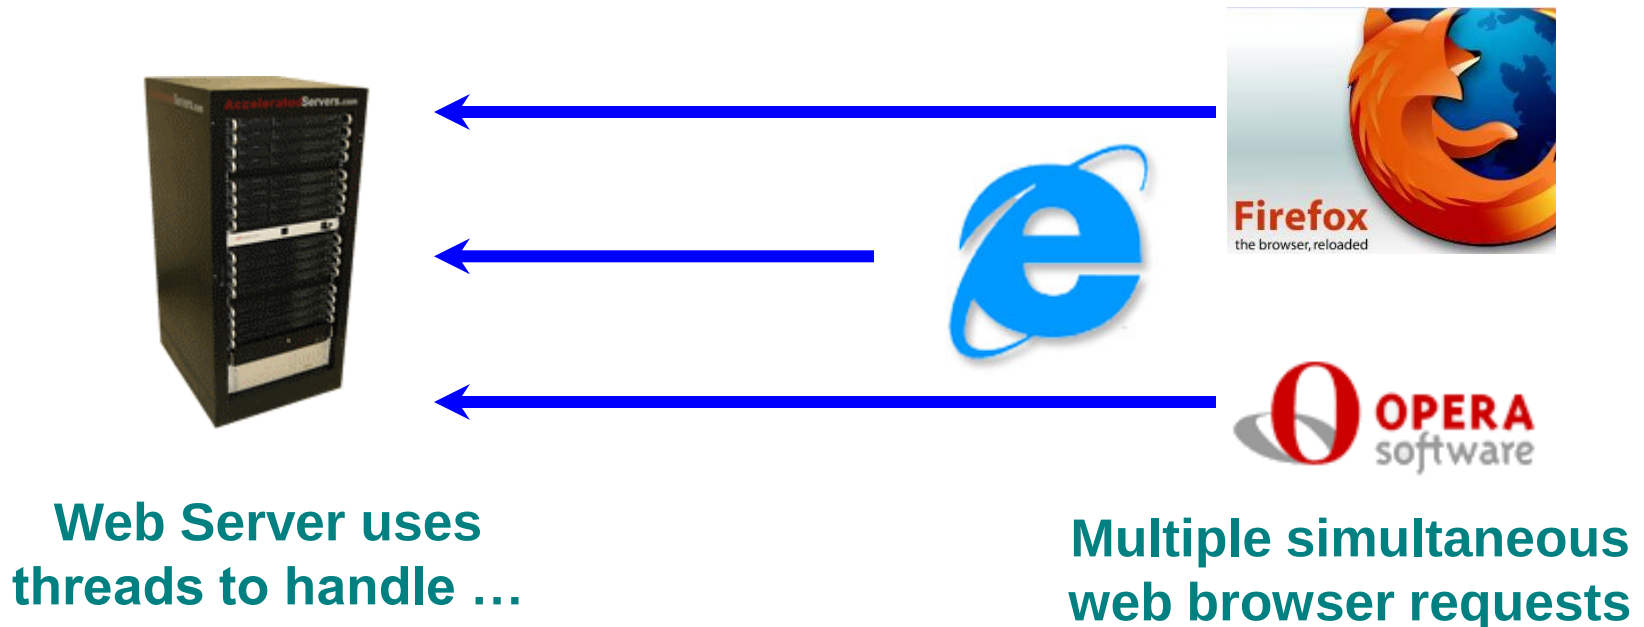


Motivation for Multithreading

2. Better utilize hardware resources

- When a thread is delayed, compute other threads
- Given extra hardware, compute threads in parallel
- **Reduce overall execution time**

■ Example

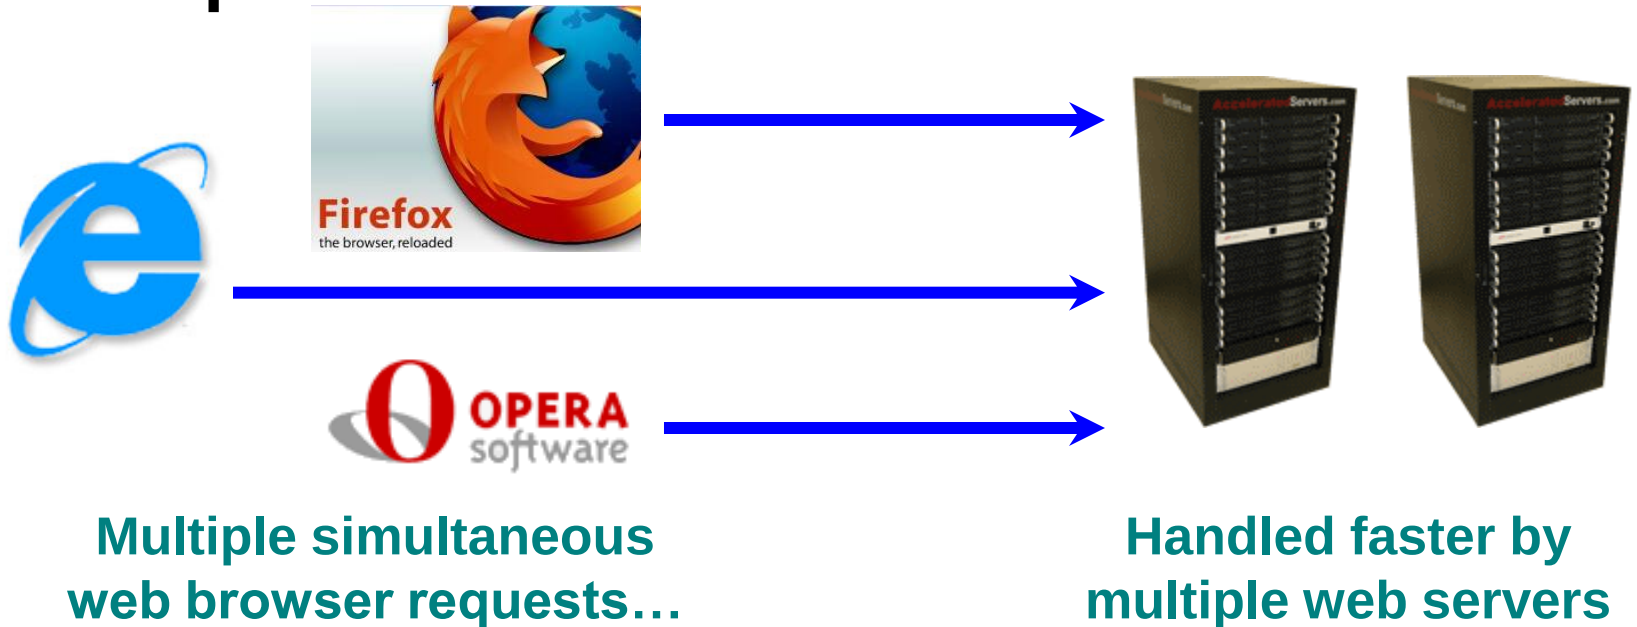

Multithreading Overview

■ Motivation & background

■ Threads

■ Creating Java threads

■ Thread states

■ Scheduling

■ Synchronization

■ Data races

■ Locks

■ Deadlock

Programming with Threads

■ Concurrent programming

- Writing programs divided into independent tasks
- Tasks may be executed in parallel on multiprocessors

■ Multithreading

- Executing program with multiple threads in parallel
- Special form of multiprocessing

Creating Threads in Java

- Need to specify work performed by thread

- Two approaches

1. Runnable interface

```
public interface Runnable {  
    public void run(); // work ⇒ thread  
}
```

2. Extending Thread class

```
public class Thread extends Object { ... }
```

Thread Class

```
public class Thread extends Object
    implements Runnable {
    public Thread();
    public Thread(String name); // Thread name
    public Thread(Runnable R); // Thread ⇒ R.run()
    public Thread(Runnable R, String name);

    public void run(); // if no R, work for thread
    public void start(); // begin thread execution
    ...
}
```

More Thread Class Methods

```
public class Thread extends Object {  
    ...  
    public static Thread currentThread()  
    public String getName()  
    public void interrupt()  
    public boolean isAlive()  
    public void join()  
    public void setDaemon()  
    public void setName()  
    public void setPriority()  
    public static void sleep()  
    public static void yield()  
}
```

Creating Threads in Java

■ Runnable Approach

1. Define class implementing Runnable interface

```
public interface Runnable {  
    public void run( );  
}
```

2. Put work to be performed in run() method

3. Create instance of the “worker” class

4. Create thread to run it

■ Create Thread object

- Pass worker object to Thread constructor

■ Or hand the worker instance to an executor

- Alternative methods for running threads

Creating Threads in Java

■ Example

```
public class MyT implements Runnable {  
    public void run( ) {  
        ... // work for thread  
    }  
}  
  
Thread t = new Thread(new MyT( )); // create thread  
t.start();                        // begin running thread  
...                               // thread executing in parallel
```

Alternative Thread Creation Approach

■ Thread Class Approach

- Extend Thread class and override run method
- Not recommended

■ Example

```
public class MyT extends Thread {  
    public void run( ) {  
        ...                // work for thread  
    }  
}  
MyT t = new MyT( ) ;      // create thread  
t.start( );               // begin running thread  
...                       // thread executing in parallel
```


Why Not Recommended?

- **Not a big problem for getting started**
 - **But a bad habit for industrial strength development**
- **Methods of worker and Thread class intermixed**
- **Hard to migrate to more efficient approaches**
 - **Thread Pools**

Creating Threads in Java

■ Note

- Thread starts executing only if `start()` is called

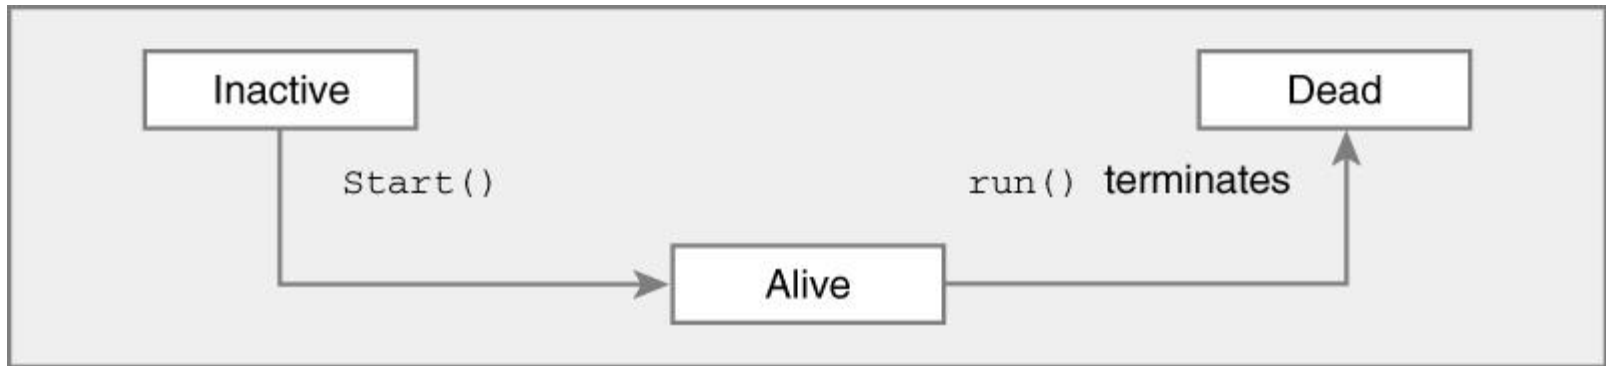

- Runnable is interface

- So it can be implemented by any class
- Required for multithreading in applets

Threads – Thread States

■ Java thread can be in one of these states


- New – thread allocated & waiting for start()
- Runnable – thread can begin execution
- Running – thread currently executing
- Blocked – thread waiting for event (I/O, etc.)
- Dead – thread finished

■ Transitions between states caused by

- Invoking methods in class Thread
 - new(), start(), yield(), sleep(), wait(), notify()...
- Other (external) events
 - Scheduler, I/O, returning from run()...

Threads – Thread States

■ State diagram

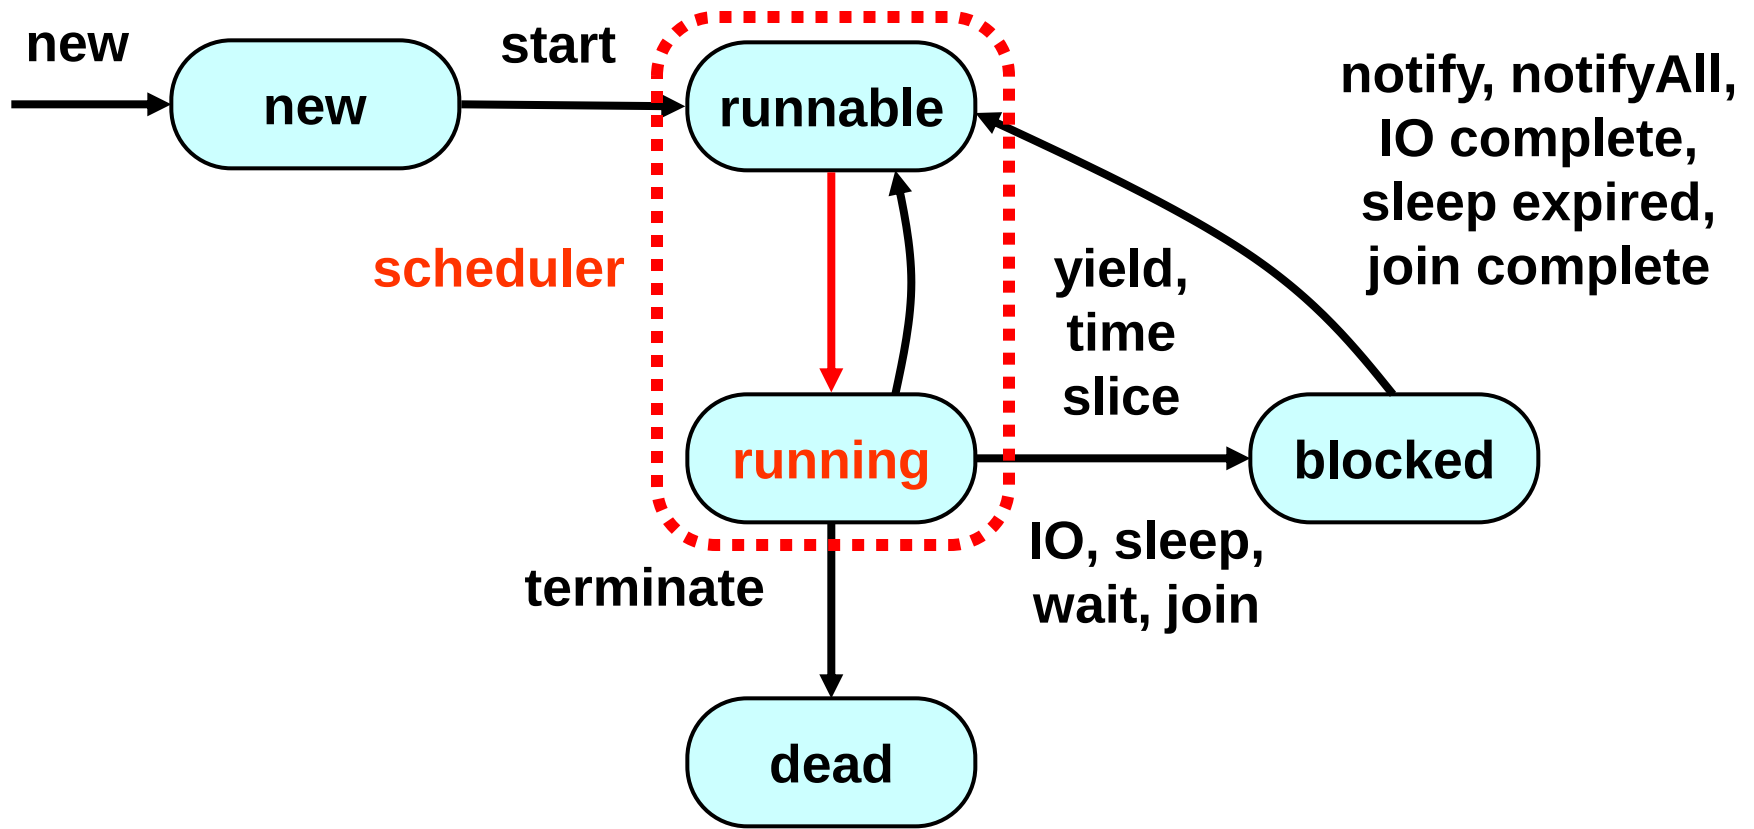

Running is a logical state → indicates runnable thread is actually running

Daemon Threads

■ Java threads types

- User

- Daemon

- Provide general services
- Typically never terminate
- Call `setDaemon()` before `start()`

■ Program termination

1. All user threads finish
2. Daemon threads are terminated by JVM
3. Main program finishes

Threads – Scheduling

■ Scheduler


- Determines which runnable threads to run
- Can be based on thread **priority**
- Part of OS or Java Virtual Machine (JVM)

■ Scheduling policy

- Nonpreemptive (cooperative) scheduling
- Preemptive scheduling


Threads – Non-preemptive Scheduling

- Threads continue execution until
 - Thread terminates
 - Executes instruction causing wait (e.g., IO)
 - Thread volunteering to stop (invoking yield or sleep)

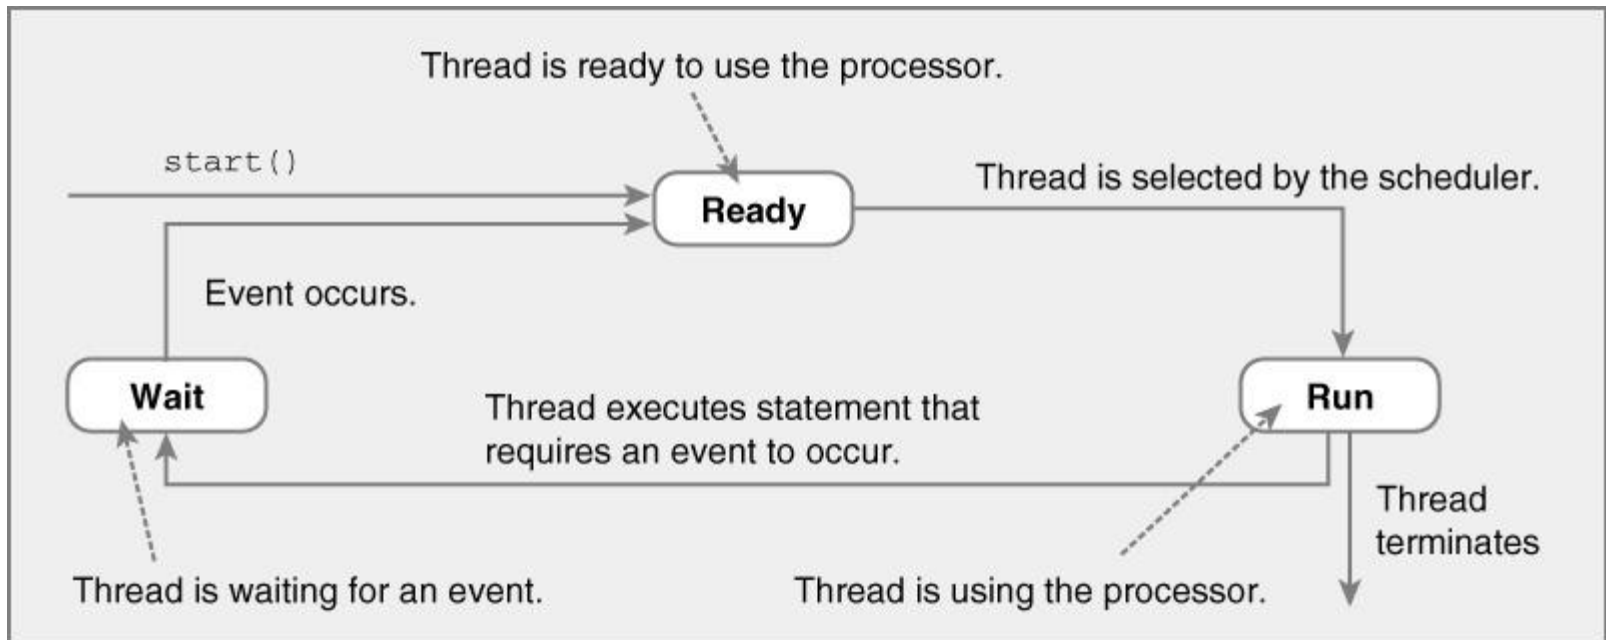

Threads – Preemptive Scheduling

- Threads continue execution until
 - Same reasons as non-preemptive scheduling
 - **Preempted** by scheduler

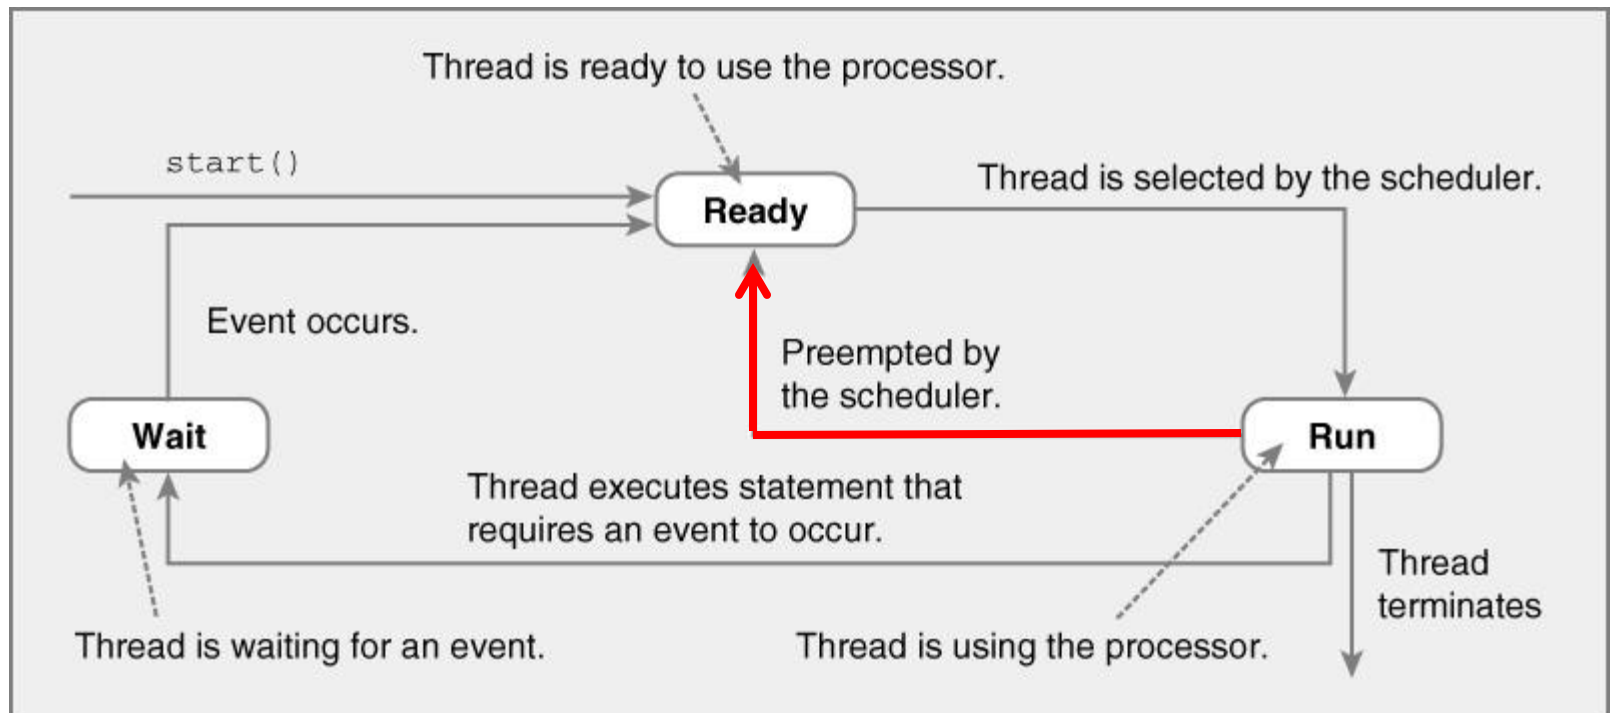

Java Thread Example

```
public class ThreadNoJoin extends Thread {  
    public void run() {  
        for (int i = 0; i < 3; i++) {  
            try {  
                sleep((int)(Math.random() * 5000)); // 5 secs  
            } catch (InterruptedException e) { e.printStackTrace(); }  
            System.out.println(i);  
        }  
    }  
    public static void main(String[] args) {  
        Thread t1 = new ThreadNoJoin();  
        Thread t2 = new ThreadNoJoin();  
        t1.start();  
        t2.start();  
        System.out.println("Done");  
    }  
}
```

Java Thread Example – Output

■ Possible outputs

- 0,1,2,0,1,2,Done // thread 1, thread 2, main()
- 0,1,2,Done,0,1,2 // thread 1, main(), thread 2
- Done,0,1,2,0,1,2 // main(), thread 1, thread 2
- 0,0,1,1,2,Done,2 // main() & threads interleaved

main (): thread 1, thread 2, println Done

thread 1: println 0, println 1, println 2

thread 2: println 0, println 1, println 2

Thread Class – join() Method

- Can wait for thread to terminate with join()
- Method prototype
 - `public final void join( )`
 - Returns when thread is done
 - Throws InterruptedException if interrupted

Java Thread Example (Join)

```
public class ThreadJoin extends Thread {  
    public void run() {  
        for (int i = 0; i < 3; i++) {  
            try {  
                sleep((int)(Math.random() * 5000)); // 5 secs  
            } catch (InterruptedException e) { e.printStackTrace(); }  
            System.out.println(i);  
        }  
    }  
}  
  
public static void main(String[] args) {  
    Thread t1 = new ThreadJoin();  
    Thread t2 = new ThreadJoin();  
    t1.start();  
    t2.start();  
    try {  
        t1.join();  
        t2.join();  
    } catch (InterruptedException e) { e.printStackTrace(); }  
    System.out.println("Done");  
}  
}
```

Thread Scheduling Observations

- Order thread is selected is **indeterminate**
 - Depends on scheduler
- Scheduling may not be fair
 - Some threads may execute more often
- Thread can block indefinitely (starvation)
 - If other threads always execute first

CS History Moment: Alan Mathison Turing

- English mathematician, logician and cryptographer
- Considered to be the father of modern computer science
- During the Second World War Turing worked at Bletchley Park, the UK's code breaking centre
- Turing machine - simulates the logic of any computer algorithm
- A. M. Turing Award - given annually by the Association for Computing Machinery (ACM) to an individual whose contribution is of major technical importance to the computer field
- Turing Awards - <http://awards.acm.org/homepage.cfm?srt=all&awd=140>
- Info and picture from Wikipedia

