

CMSC 132: Object-Oriented Programming II



Regular Expressions & Automata

Department of Computer Science
University of Maryland, College Park

Overview

■ Regular expressions

- Notation

- Patterns

- Java support

■ Automata

- Languages

- Finite State Machines

- Turing Machines

- Computability

Regular Expression (RE)

- Notation for describing **simple** string patterns
- Very useful for text processing
 - Finding / extracting pattern in text
 - Manipulating strings
 - Automatically generating web pages

Regular Expression

■ Regular expression is composed of

■ Symbols

■ Operators

■ Concatenation AB

■ Union $A \mid B$

■ Closure A^*

Definitions

■ Alphabet

- Set of symbols Σ

- Examples $\Rightarrow \{a, b\}, \{A, B, C\}, \{a-z, A-Z, 0-9\} \dots$

■ Strings

- Sequences of 0 or more symbols from alphabet

- Examples $\Rightarrow \epsilon, \text{"a"}, \text{"bb"}, \text{"cat"}, \text{"caterpillar"} \dots$

 empty string

■ Languages

- Sets of strings

- Examples $\Rightarrow \emptyset, \{\epsilon\}, \{\text{"a"}\}, \{\text{"bb"}, \text{"cat"}\} \dots$

More Formally

- Regular expression describes a language over an alphabet
- $L(E)$ is language for regular expression E
 - Set of strings generated from regular expression
 - String in language if it matches pattern specified by regular expression

Regular Expression Construction

- Every symbol is a regular expression
 - Example “a”
- REs can be constructed from other REs using
 - Concatenation
 - Union |
 - Closure *

Regular Expression Construction

■ Concatenation

- A followed by B

- $L(AB) = \{ ab \mid a \in L(A) \text{ AND } b \in L(B) \}$

■ Example

- a

 - {"a"}

- ab

 - {"ab"}

Regular Expression Construction

■ Union

- A or B

- $L(A \mid B) = \{ a \mid a \in L(A) \text{ OR } a \in L(B) \}$

■ Example

- a | b

- {"a", "b"}

Regular Expression Construction

■ Closure

- Zero or more A

- $L(A^*) = \{ a \mid a = \varepsilon \text{ OR } a \in L(A)L(A^*) \}$

■ Example

- a^*

- $\{\varepsilon, "a", "aa", "aaa", "aaaa" \dots\}$

- $(ab)^*c$

- $\{"c", "abc", "ababc", "abababc" \dots\}$

Regular Expressions in Java

- **Java supports regular expressions**
 - In `java.util.regex.*`
 - Applies to `String` class in Java 1.4
- **Introduces additional specification methods**
 - Simplifies specification
 - Does not increase power of regular expressions
 - Can simulate with concatenation, union, closure

Regular Expressions in Java

■ Concatenation

■ `ab` `"ab"`

■ `(ab)c` `"abc"`

■ Union (bar `|` or square brackets `[]` for chars)

■ `a | b` `"a", "b"`

■ `[abc]` `"a", "b", "c"`

■ Closure (star `*`)

■ `(ab)*` ϵ , `"ab"`, `"abab"`, `"ababab"` ...

■ `[ab]*` ϵ , `"a"`, `"b"`, `"aa"`, `"ab"`, `"ba"`, `"bb"` ...

Regular Expressions in Java

■ One or more (plus +)

■ **a+** One or more “a”s

■ Range (dash —)

■ **[a–z]** Any lowercase letters

■ **[0–9]** Any digit

■ Complement (caret ^ at beginning of RE)

■ **[^a]** Any symbol except “a”

■ **[^a–z]** Any symbol except lowercase letters

Regular Expressions in Java

■ Precedence

- Higher precedence operators take effect first

■ Precedence order

- | | |
|-----------------|---------|
| ■ Parentheses | (...) |
| ■ Closure | a* b+ |
| ■ Concatenation | ab |
| ■ Union | a b |
| ■ Range | [...] |

Highest



Lowest

Regular Expressions in Java

■ Examples

- `ab+` `"ab", "abb", "abbb", "abbbb"...`
- `(ab)+` `"ab", "abab", "ababab", ...`
- `ab | cd` `"ab", "cd"`
- `a(b | c)d` `"abd", "acd"`
- `[abc]d` `"ad", "bd", "cd"`

■ When in doubt, use parentheses

Regular Expressions in Java

■ Predefined character classes

- `[.]` Any character except end of line
- `[\d]` Digit: `[0-9]`
- `[\D]` Non-digit: `[^0-9]`
- `[\s]` Whitespace character: `[ \t\n\r\x0B\f]`
- `[\S]` Non-whitespace character: `[^\s]`
- `[\w]` Word character: `[a-zA-Z_0-9]`
- `[\W]` Non-word character: `[^\w]`

Regular Expressions in Java

■ Literals using backslash \

- Need two backslash

- Java compiler will interpret 1st backslash for String

■ Examples

- \\] “]”

- \\.

“.”

- \\\\ “\”

- 4 backslashes interpreted as \\ by Java compiler

Using Regular Expressions in Java

■ Compile pattern

- `import java.util.regex.*;`

- `Pattern p = Pattern.compile("[a-z]+");`

■ Create matcher for specific piece of text

- `Matcher m = p.matcher("Now is the time");`

■ Search text

- `boolean found = m.find();`

- Returns true if pattern is found anywhere in text

- `boolean exact = m.matches()`

- returns true if pattern matches entire text

Using Regular Expressions in Java

■ If pattern is found in text

- `m.group()` $\Rightarrow$ string found
- `m.start()` $\Rightarrow$ index of the first character matched
- `m.end()` $\Rightarrow$ index after last character matched
- `m.group()` is same as `s.substring(m.start(), m.end())`

■ Calling `m.find()` again

- Starts search after end of current pattern match

Complete Java Example

■ Code

```
import java.util.regex.*;
public class RegexTest {
    public static void main(String args[]) {
        Pattern p = Pattern.compile("[a-z]+");
        Matcher m = p.matcher("Now is the time");
        while (m.find()) {
            System.out.print(m.group() + " – ");
        }
    }
}
```

■ Output

■ ow – is – the – time –

Language Recognition

- Accept string if and only if in language
- Abstract representation of **computation**
- Performing language recognition can be
 - Simple
 - Strings with **even** number of 1's
 - Not Simple
 - Strings with any number of a's, followed by the same number of b's
 - Hard
 - Strings representing **legal** Java programs
 - Not possible for all cases
 - Strings representing **nonterminating** Java programs

Automata

- Simple abstract computers
- Can be used to recognize languages
- Finite state machine
 - States + transitions
- Turing machine
 - States + transitions + tape


Finite State Machine

■ States

- Starting

- Accepting


- Finite number allowed



■ Transitions

- State to state

- Labeled by symbol

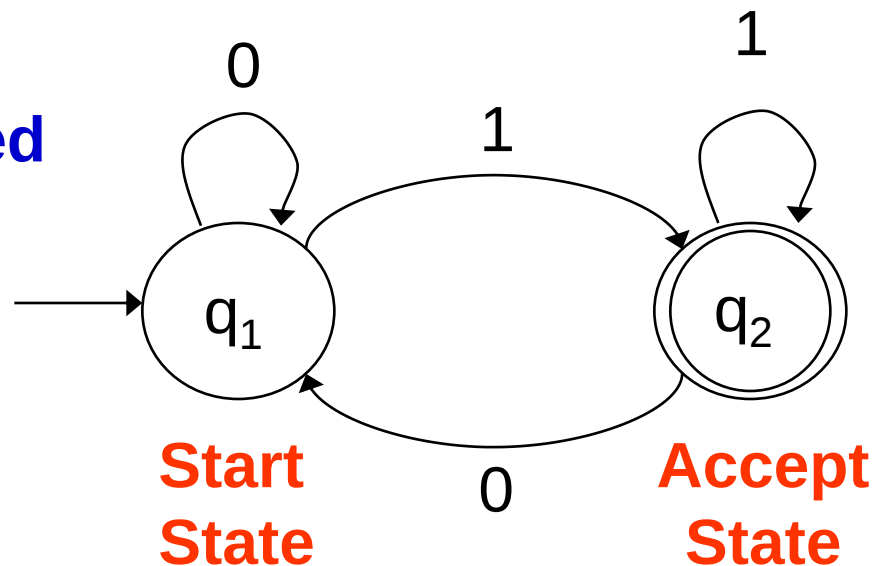


$$L(M) = \{ w \mid w \text{ ends in a } 1 \}$$

Finite State Machine

■ Operations


- Move along transitions based on symbol
- **Accept** string if ends up in accept state
- **Reject** string if ends up in non-accepting state

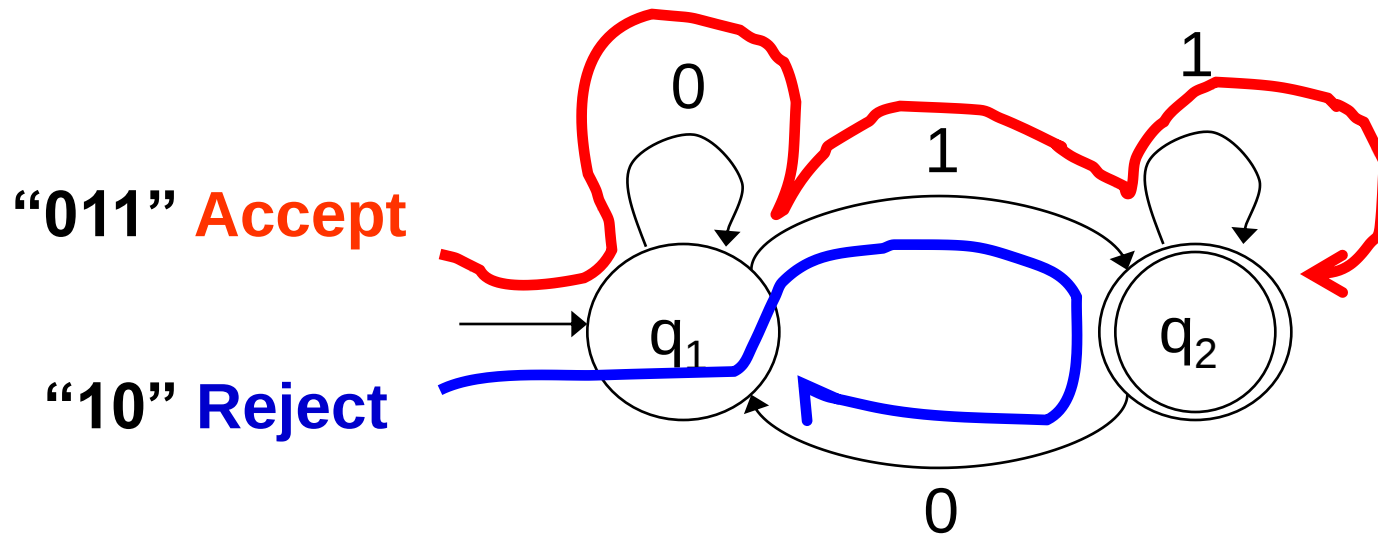

Finite State Machine



■ Properties

- Powerful enough to recognize regular expressions
- In fact, finite state machine $\Leftrightarrow$ regular expression

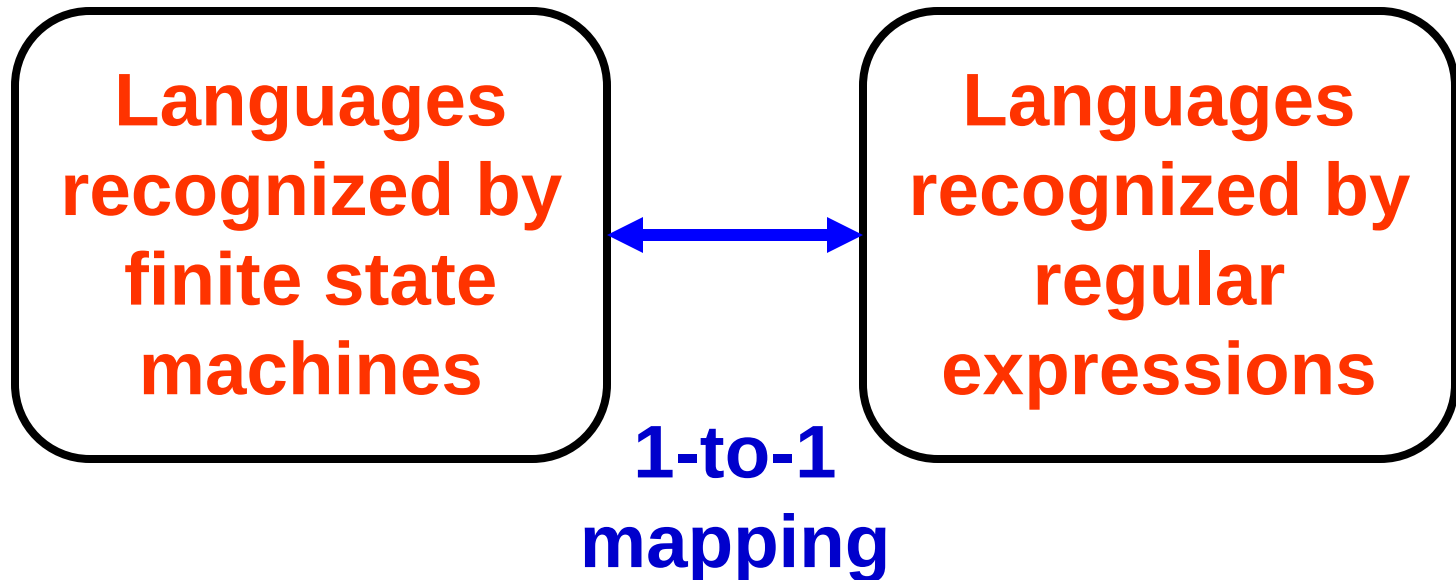

Turing Machine

- Defined by Alan Turing in 1936
- Finite state machine + **tape**
- Tape
 - Infinite storage
 - Read / write one symbol at tape head
 - Move tape head one space left / right

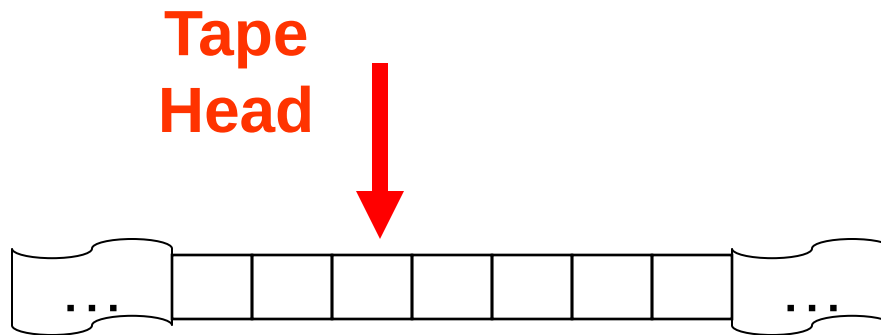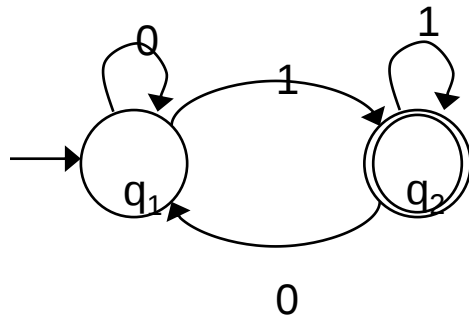


Turing Machine

■ Allowable actions

- Read symbol from current square
- Write symbol to current square
- Move tape head left
- Move tape head right
- Go to next state

Turing Machine

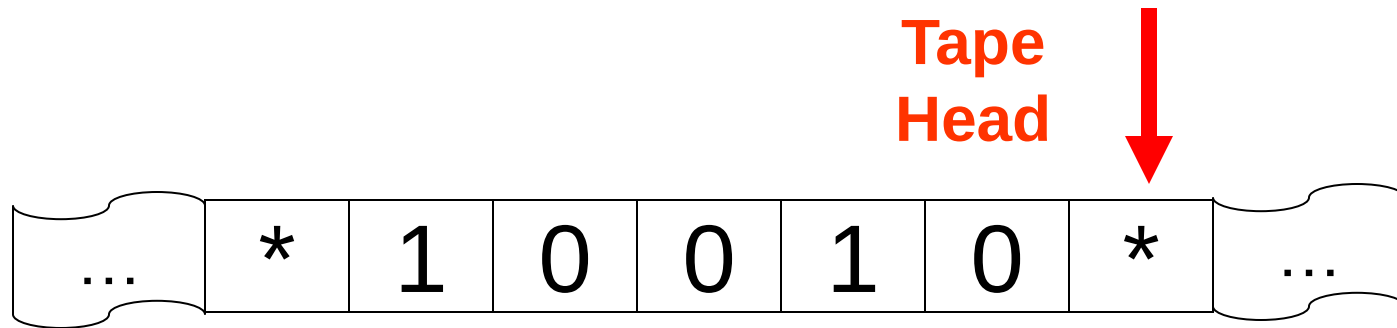

Current State	Current Content	Value to Write	Direction to Move	New state to enter
START	*	*	Left	MOVING
MOVING	1	0	Left	MOVING
MOVING	0	1	Left	MOVING
MOVING	*	*	No move	HALT

Turing Machine

■ Operations

- Read symbol on current square
- Select action based on symbol & current state
- **Accept** string if in accept state
- **Reject** string if halts in non-accepting state
- **Reject** string if computation **does not terminate**

■ Halting problem

- It is **undecidable** in general whether long-running computations will eventually accept

Computability

■ Computability

- A language is **computable** if it can be recognized by some algorithm with finite number of steps

■ Church-Turing thesis

- Turing machine can recognize any language computable on any machine

■ Intuition

- Turing machine captures essence of computing
 - Both in a formal sense, and in an informal practical sense



Computability – Turing Test

■ Turing Test

- Test machine's capability to demonstrate intelligence
- Proposed by Alan Turing in 1950
- Practical test for “Can machines think?”

■ Test procedure

1. Judge converses via text (e.g., instant messaging)
2. Pass if can't reliably tell whether machine or human

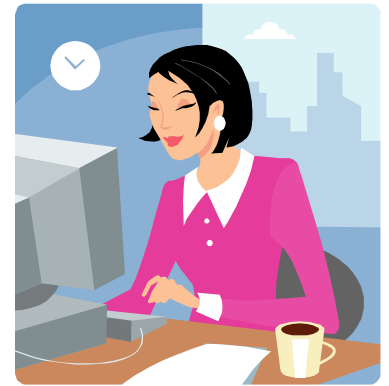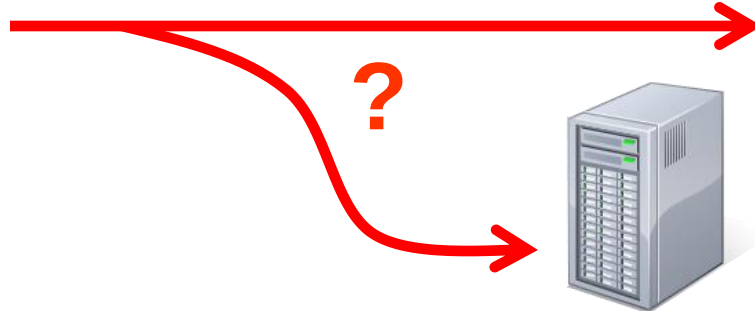

More Turing Tests



**“On the Internet,
nobody knows
you’re a dog.”**

Computability – Reverse Turing Test

■ Reverse Turing test

- Computer determines whether human or machine

■ CAPTCHA

- Completely Automated Public Turing test to tell Computers and Humans Apart
- Challenge-response asking for word identification
 - Useful for foiling scripts

following



More Reverse Turing Tests

