

CMSC 330: Organization of Programming Languages

Introduction to Ruby

CMSC 330

1

Last Lecture

- ▶ Many types of programming languages
 - Imperative, functional, logical, OO, scripting
- ▶ Many programming language attributes
 - Clear, orthogonal, natural...
- ▶ Programming language implementation
 - Compiled, interpreted

CMSC 330

2

Introduction

- ▶ Ruby is an *object-oriented, imperative scripting language*



- “I wanted a scripting language that was more powerful than Perl, and more object-oriented than Python. That’s why I decided to design my own language.”
- “I believe people want to express themselves when they program. They don’t want to fight with the language. Programming languages must feel natural to programmers. I tried to make people enjoy programming and concentrate on the fun and creative part of programming when they use Ruby.”

– Yukihiro Matsumoto (“Matz”)

CMSC 330

3

Books on Ruby



- Earlier version of Thomas book available on web
 - ▶ See course web page


CMSC 330

4

Applications of Scripting Languages

▶ Scripting languages have many uses

- Automating system administration
- Automating user tasks
- Quick-and-dirty development



▶ Major application

Text processing

CMSC 330

5

Output from Command-Line Tool

```
% wc *
 271    674    5323 AST.c
  100    392    3219 AST.h
  117   1459   23878 AST.o
 1874   5428   47461 AST_defs.c
 1375   6307   53667 AST_defs.h
  371    884    9483 AST_parent.c
  810   2328   24589 AST_print.c
  640   3070   33530 AST_types.h
  285    846    7081 AST_utils.c
   59    274    2154 AST_utils.h
   50    400   28756 AST_utils.o
  866   2757   25873 Makefile
  270    725    5578 Makefile.am
  866   2743   27320 Makefile.in
   38    175    1154 alloca.c
 2035   4516   47721 aloctypes.c
   86    350    3286 aloctypes.h
  104   1051   66848 aloctypes.o

...
```

CMSC 330

6

Climate Data for IAD in August, 2005

```
=====
1  2  3  4  5  6A 6B  7  8  9 10 11 12 13 14 15 16 17 18
      AVG MX 2MIN
DY MAX MIN AVG DEP HDD CDD WTR SNW DPTH SPD SPD DIR MIN PSBL S-S WK SPD DR
=====
1  87  66  77  1  0 12 0.00 0.0  0  2.5  9 200  M  M  7 18  12 210
2  92  67  80  4  0 15 0.00 0.0  0  3.5 10  10  M  M  3 18  17 320
3  93  69  81  5  0 16 0.00 0.0  0  4.1 13 360  M  M  2 18  17 360
4  95  69  82  6  0 17 0.00 0.0  0  3.6  9 310  M  M  3 18  12 290
5  94  73  84  8  0 19 0.00 0.0  0  5.9 18  10  M  M  3 18  25 360
6  89  70  80  4  0 15 0.02 0.0  0  5.3 20 200  M  M  6 138 23 210
7  89  69  79  3  0 14 0.00 0.0  0  3.6 14 200  M  M  7  1  16 210
8  86  70  78  3  0 13 0.74 0.0  0  4.4 17 150  M  M 10 18  23 150
9  76  70  73 -2  0  8 0.19 0.0  0  4.1  9  90  M  M  9 18  13  90
10 87  71  79  4  0 14 0.00 0.0  0  2.3  8 260  M  M  8  1  10 210
...
```

CMSC 330

7

Raw Census 2000 Data for DC

```
u108 S,DC,000,01,0000 001, 5720 59,7 226 4,57 2059,12. 6,57 2059, 5720 59, 0,0,
0,0,572059,175306,343 213, 2006,147 62, 383, 2172 8,14 661, 5720 59,5 2704 4,15 861
7, 340061,1560,14605,2 91,1 638, 1027 2,4 5015,166 89,3 152, 446, 157, 92,2 0090,43
89,572059,268827,3362,304 8,31 70,3 241,350 4,32 86,3 270,3475,393 9,36 47,3 525
,3044,2928,2913,2769,2752,293 3,27 03,4056,550 1,52 17,4 969,1355 5,24 995,242
16,23726,20721,18802,1652 3,12 318,434 5,58 10,3 423,4690,710 5,57 39,3 260,234
7,303232,3329,3057,29 35,3 429,3326,34 56,3 257,3754,319 2,35 23,3 336,3276,29
89,2838,2824,2624,280 7,28 71,4 941,658 8,56 25,5 563,1717 7,27 475,2437 7,22 818
,21319,20851,19117,15 260,5066,670 8,4 257,6117,107 41,9 427,6807,617 5,57 205
9,536373,370675,11596 3,55 603,6036 0,5 7949,129 440,1225 18,3 754,3168,224 48,
9967,4638,14110,16160,165 698,6104 9,4 7694,133 55,7 1578,608 75,1 0703,330 71,
35686,7573,28113,2485 90,1 0856 9,47 694,608 75,1 4002 1,11 5963,580 50,2 1654,36
396,57913,10355,4065,6290,475 58,2 522 9,22 329,2405 8,13 355,1070 3,70 088,657
37,37112,21742,12267,9475,972 3,25 73,2314,760,286 25,8 207,7469,738,191 85,
18172,1013,1233,4351,3610,741,248 590,199 456,9422 1,46 274,2144 3,24 831,479
47,8705,3979,4726,392 42,2 5175,140 67,1052 35,8 2928,223 07,4 9134,217 42,1 177
6,211,11565,9966,1650,86,1564,831 6,5 4,82 62,2 7392,256 41,1 751,2485 90,1 159
63,4999,22466,26165,2 4062,165 29,1 240 9,75 94,1 739,1326 27,1 1670,324 45,2 322
5,21661,16234,12795,1 0563,403 4,24 859 0,11 5963,487 38,2 8914,192 59,1 0312,47
48,3992,132627,108569,192 84,2 713,120 9,50 9,21 8,12 5
...
```

CMSC 330

8

A Simple Example

- ▶ Let's start with a simple Ruby program

ruby1.rb:

```
# This is a ruby program
x = 37
y = x + 5
print(y)
print("\n")
```

```
% ruby -w ruby1.rb
42
%
```

CMSC 330

9

Language Basics

comments begin with #, go to end of line

variables need not
be declared

no special main()
function or
method

```
# This is a ruby program
x = 37
y = x + 5
print(y)
print("\n")
```

line break separates
expressions
(can also use ";"
to be safe)

CMSC 330

10

Run Ruby, Run

There are several ways to run a Ruby program

- `ruby -w filename` – execute script in *filename*
 - ▶ tip: the `-w` will cause Ruby to print a bit more if something bad happens
 - ▶ Ruby filenames should end with `.rb` extension
- `irb` – launch interactive Ruby shell
 - ▶ Can type in Ruby programs one line at a time, and watch as each line is executed
`irb(main):001:0> 3+4`
`7`
 - ▶ Can load Ruby programs via `load` command
 - Form: `load string`
 - String must be name of file containing Ruby program
 - E.g.: `load 'foo.rb'`


▶ Ruby 1.9.3 is installed on linuxlab, Grace clusters

CMSC 330

11

Run Ruby, Run (cont.)

- `fxri` – launch standalone interactive Ruby shell

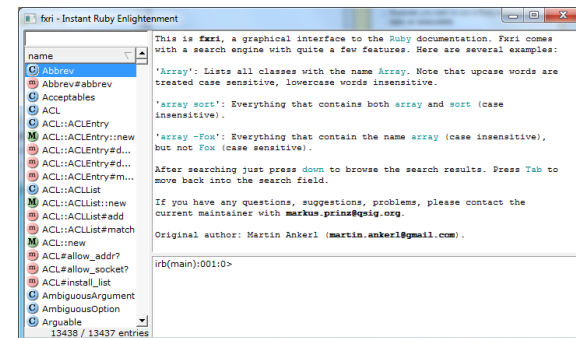

CMSC 330

12

Run Ruby, Run (cont.)

- ▶ Suppose you want to run a Ruby script as if it were an executable (e.g. “double-click”, or as a command)
 - Windows
 - Must associate .rb file extension with ruby command
 - If you installed Ruby using the Windows installer, this was done automatically
 - The Ruby web site has information on how to make this association

CMSC 330

13

Run Ruby, Run (cont.)

- ▶ Suppose you want to run a Ruby script as if it were an executable (cont.)

- *nix (Linux / Unix / etc.)

```
#!/usr/local/bin/ruby -w
print("Hello, world!\n")
```

- The first line (“shebang”) tells the system where to find the program to interpret this text file
- Must `chmod u+x filename` first, or `chmod a+x filename` so everyone has exec permission
- Warning: Not very portable: Depends on location of Ruby interpreter
 - /usr/local/bin/ruby vs. /usr/bin/ruby vs. /opt/local/bin/ruby etc.

CMSC 330

14

Creating Ruby Programs

- ▶ As with most programming languages, Ruby programs are text files.
 - Note: there are actually different versions of “plain text”! E.g. ASCII, Unicode, Utf-8, etc.
 - You won’t need to worry about this in this course.
- ▶ To create a Ruby program, you can use your favorite text editor, e.g.
 - notepad++ (free, much better than notepad)
 - emacs (free, infinitely configurable)
 - vim
 - Eclipse (see web page for plugin instructions)
 - Many others

CMSC 330

15

Explicit vs. Implicit Declarations

- ▶ Java and C/C++ use **explicit variable declarations**
 - Variables are named and typed before they are used
 - `int x, y; x = 37; y = x + 5;`
- ▶ In Ruby, variables are **implicitly declared**
 - First use of a variable declares it and determines type
 - `x = 37; y = x + 5;`
 - x, y exist, will be integers
 - Ruby allows multi-assignment, too
 - `x,y = 37, 5; y += x`
 - `x,y = 37,x+5` would have failed; x was not yet assigned

CMSC 330

16

Tradeoffs?

Explicit Declarations

More text to type

Helps prevent typos

Forces programmer to document types

Implicit Declarations

Less text to type

Easy to mistype variable name

Variable not held to a fixed type (could imagine variable declarations without types)

CMSC 330

17

Methods in Ruby

Methods are declared with `def...end`

List parameters at definition

```
def sayN(message, n)
  i = 0
  while i < n
    puts message
    i = i + 1
  end
  return i
end

x = sayN("hello", 3)
puts(x)
```

May omit parens on call

Invoke method

Like print, but Adds newline

Methods should begin with lowercase letter and be defined before they are called
Variable names that begin with uppercase letter are *constants* (only assigned once)

CMSC 330

18

Method Return Values

- Value of the return is the value of the last executed statement in the method

- These are the same:

```
def add_three(x)
  return x+3
end
```

```
def add_three(x)
  x+3
end
```

- Methods can return multiple results (as a list)

```
def dup(x)
  return x,x
end
```

CMSC 330

19

Terminology

- Formal parameters

- Parameters used in the body of the method
- `def sayN(message, n)` in our example

- Actual parameters

- Arguments passed in to the method at a call
- `x = sayN("hello", 3)` in our example

CMSC 330

20

Style

- ▶ Names of methods that return a boolean should end in ?
- ▶ Names of methods that modify an object's state should end in !
- ▶ Example: suppose `x = [3,1,2]` (this is an array)
 - `x.member? 3` returns `true` since 3 is in the array `x`
 - `x.sort` returns a new array that is sorted
 - `x.sort!` modifies `x` in place

CMSC 330

21

Control Statements in Ruby

- ▶ A **control statement** is one that affects which instruction is executed next
 - We've seen two so far in Ruby
 - ▶ `while` and `method call`
- ▶ Ruby also has conditionals

```
if grade >= 90 then
  puts "You got an A"
elsif grade >= 80 then
  puts "You got a B"
elsif grade >= 70 then
  puts "You got a C"
else
  puts "You're not doing so well"
end
```

CMSC 330

22

Ruby Conditionals Must End!

- ▶ All Ruby conditional statements must be terminated with the `end` keyword.
- ▶ Examples

```
• if grade >= 90 then
  puts "You got an A"
end

• if grade >= 90 then
  puts "You got an A"
else
  puts "No A, sorry"
end
```

CMSC 330

23

What is True?

- ▶ The **guard** of a conditional is the expression that determines which branch is taken

```
if grade >= 90 then
  ...
```

Guard

- ▶ The **true** branch is taken if the guard evaluates to anything except
 - `false`
 - `nil`
- ▶ Warning to C programmers: **0 is not false!**

CMSC 330

24

Yet More Control Statements in Ruby

- ▶ `unless cond then stmt-f else stmt-t end`
 - Same as “if not cond then stmt-t else stmt-f end”

```
unless grade < 90 then
  puts "You got an A"
else unless grade < 80 then
  puts "You got a B"
end
```

- ▶ `until cond body end`
 - Same as “while not cond body end”

```
until i >= n
  puts message
  i = i + 1
end
```

CMSC 330

25

Using If and Unless as Modifiers

- ▶ Can write `if` and `unless` after an expression
 - puts "You got an A" if grade >= 90
 - puts "You got an A" unless grade < 90
- ▶ Why so many control statements?
 - Is this a good idea? Why or why not?
 - **Good**: can make program more readable, expressing programs more directly. In natural language, many ways to say the same thing, which supports brevity and adds style.
 - **Bad**: many ways to do the same thing may lead to confusion and hurt maintainability (if future programmers don't understand all styles)

CMSC 330

26

Classes and Objects

- ▶ Class names begin with an uppercase letter
- ▶ The “new” method creates an object
 - `s = String.new` creates a new String and makes s refer to it
- ▶ Every class inherits from `Object`

CMSC 330

27

Everything is an Object

- ▶ In Ruby, **everything** is an object
 - `(-4).abs`
 - integers are instances of `Fixnum`
 - `3 + 4`
 - infix notation for “invoke the + method of 3 on argument 4”
 - `"programming".length`
 - strings are instances of `String`
 - `String.new`
 - classes are objects with a `new` method
 - `4.13.class`
 - use the `class` method to get the class for an object
 - floating point numbers are instances of `Float`

CMSC 330

28

Objects and Classes

- ▶ Objects are data
- ▶ Classes are types (the kind of data which things are)
- ▶ But in Ruby, classes themselves are objects!

Object	Class (aka type)
10	Fixnum
-3.30	Float
"CMSC 330"	String
String.new	String
['a', 'b', 'c']	Array
Fixnum	Class

- ▶ Fixnum, Float, and String are *objects* of type Class
 - So is Class itself!

CMSC 330

29

Two Cool Things to Do with Classes

- ▶ Since classes are objects, you can manipulate them however you like

- Here, the type of *y* depends on *p*
 - ▶ Either a String or a Time object

```
if p then
  x = String
else
  x = Time
End
y = x.new
```

- ▶ You can get names of all the methods of a class

- Object.methods
 - ▶ => ["send", "name", "class_eval", "object_id", "new", "autoload?", "singleton_methods", ...]

CMSC 330

30

The nil Object

- ▶ Ruby uses a special object *nil*
 - All uninitialized fields set to *nil* (@ prefix used for fields)
irb(main):004:0> @x
=> nil
 - Like NULL or 0 in C/C++ and null in Java
- ▶ *nil* is an object of class NilClass
 - It's a *singleton object* – there is only one instance of it
 - ▶ NilClass does not have a new method
 - *nil* has methods like *to_s*, but not other methods
irb(main):006:0> nil + 2
NoMethodError: undefined method '+' for nil:NilClass

CMSC 330

31

What is a Program?

- ▶ In C/C++, a program is...
 - A collection of declarations and definitions
 - With a distinguished function definition
 - ▶ int main(int argc, char *argv[]) { ... }
 - When you run a C/C++ program, it's like the OS calls *main(...)*
- ▶ In Java, a program is...
 - A collection of class definitions
 - With some class (say, MyClass) containing a method
 - ▶ public static void main(String[] args)
 - When you run *java MyClass*, the *main* method of class *MyClass* is invoked

CMSC 330

32

A Ruby Program is...

► The class `Object`

- When the class is loaded, any expressions not in method bodies are executed

defines a method of `Object`

invokes `self.sayN`

invokes `self.puts`
(part of `Object`)

```
def sayN(message, n)
  i = 0
  while i < n
    puts message
    i = i + 1
  end
  return i
end

x = sayN("hello", 3)
puts(x)
```

CMSC 330

33

Ruby is Dynamically Typed

► Recall we don't declare types of variables

- But Ruby does keep track of types at run time

`x = 3; x.foo`

`NoMethodError: undefined method 'foo' for 3:Fixnum`

► We say that Ruby is **dynamically typed**

- Types are determined and checked at run time

► Compare to C, which is **statically typed**

```
# Ruby
x = 3
x = "foo" # gives x a
          # new type
```

```
/* C */
int x;
x = 3;
x = "foo"; /* not allowed */
```

CMSC 330

34

Types in Java and C++

► Are Java and C++ statically or dynamically typed?

- A little of both
- Many things are checked statically
`Object x = new Object();`
`x.println("hello");` // No such method error at compile time
- But other things are checked dynamically
`Object o = new Object();`
`String s = (String) o;` // No compiler warning, fails at run time
// (Some Java compilers may be smart enough to warn about above cast)

CMSC 330

35

Tradeoffs?

Static types

More work when coding

Helps prevent some
subtle errors

Fewer programs type
check

Dynamic types

Less work when coding

Can use objects
incorrectly and not
discover until run time

More programs type
check

CMSC 330

36

Arrays and Hashes

- ▶ Ruby data structures are typically constructed from Arrays and Hashes
 - Built-in syntax for both
 - Each has a rich set of standard library methods
 - They are integrated/used by methods of other classes

CMSC 330

37

Standard Library: Array

- ▶ Arrays of objects are instances of class `Array`
 - Arrays may be heterogeneous
`a = [1, "foo", 2.14]`
 - C-like syntax for accessing elements, indexed from 0
`x = a[0]; a[1] = 37`
- ▶ Arrays are **growable**
 - Increase in size automatically as you access elements
`irb(main):001:0> b = []; b[0] = 0; b[5] = 0; puts b.inspect`
`[0, nil, nil, nil, nil, 0]`
 - `[]` is the empty array, same as `Array.new`

CMSC 330

38

Standard Library: Arrays (cont.)

- ▶ Arrays can also shrink
 - Contents shift left when you delete elements
`a = [1, 2, 3, 4, 5]`
`a.delete_at(3)` # delete at position 3; `a = [1,2,3,5]`
`a.delete(2)` # delete element = 2; `a = [1,3,5]`
- ▶ Can use arrays to model stacks and queues
`a = [1, 2, 3]`
`a.push("a")` # `a = [1, 2, 3, "a"]`
`x = a.pop` # `x = "a"`
`a.unshift("b")` # `a = ["b", 1, 2, 3]`
`y = a.shift` # `y = "b"`

note: `push`, `pop`,
`shift`, and `unshift`
all permanently
modify the array

CMSC 330

39

Iterating Through Arrays

- ▶ It's easy to iterate over an array with `while`

```
a = [1,2,3,4,5]
i = 0
while i < a.length
  puts a[i]
  i = i + 1
end
```

- ▶ Looping through all elements of an array is very common
 - And there's a better way to do it in Ruby

CMSC 330

40

Iteration and Code Blocks

- ▶ The **Array** class also has an **each** method
 - Takes a code block as an argument

```
a = [1,2,3,4,5]
a.each { |x| puts x }
```

code block delimited by
{ }'s or do...end

parameter name

body

- ▶ We'll consider code blocks generally a bit later

CMSC 330

41

Ranges

- ▶ **1..3** is an object of class **Range**
 - Integers between 1 and 3 inclusively
- ▶ **1...3** also has class **Range**
 - Integers between 1 and 3 but not including 3 itself.
- ▶ Not just for integers
 - 'a'..'z' represents the range of letters 'a' to 'z'
 - 1.3...2.7 is the *continuous* range [1.3,2.7)
 - (1.3...2.7).include? 2.0 #=> true
- ▶ Discrete ranges offer the **each** method to iterate
 - And can convert to an array via **to_a**; e.g., (1..2).to_a

CMSC 330

42

Other Useful Control Statements

```
for elt in [1, "math", 3.4]
  puts elt.to_s
end
```

```
for i in (1..3)
  puts i
end
```

```
(1..3).each {
  |elt|
  puts elt
}
```

generates a
string; cf. to_i

```
while i > n
  break
next
puts message
redo
end
```



```
IO.foreach(filename)
{ |x|
  puts x
}
```

code
block

```
case x
when 1, 3..5
when 2, 6..8
end
```

does not need
break

CMSC 330

43

More Data-driven Control Statements

Ruby function to print all even numbers from 0 up to (but not including) some given number **x**

```
def even(x)
  for i in (0...x)
    if i % 2 == 0
      puts i
    end
  end
end
```

```
def even(x)
  x.times { |i|
    if i % 2 == 0
      puts i
    end
  }
end
```

```
def even(x)
  0.upto(x-1) { |i|
    if i % 2 == 0
      puts i
    end
  }
end
```

CMSC 330

44

Standard Library: Hash

- ▶ A **hash** acts like an **associative array**
 - Elements can be indexed by any kind of values
 - Every Ruby object can be used as a hash key, because the **Object** class has a **hash** method
- ▶ Elements are referred to using **[]** like array elements, but **Hash.new** is the **Hash** constructor

```
italy["population"] = 58103033
italy["continent"] = "europe"
italy[1861] = "independence"
```

CMSC 330

45

Hash (cont.)

- ▶ **Hash** methods
 - **values** returns array of a hash's values (in some order)
 - **keys** returns an array of a hash's keys (in some order)

- ▶ Iterating over a hash

```
italy.keys.each { |k|
  print "key: ", k, " value: ", italy[k]
}

italy.each { |k,v|
  print "key: ", k, " value: ", v
}
```

CMSC 330

46

Hash (cont.)

Convenient syntax for creating literal hashes

- Use **{ key => value, ... }** to create hash table

```
credits = {
  "cmssc131" => 4,
  "cmssc330" => 3,
}

x = credits["cmssc330"] # x now 3
credits["cmssc311"] = 3
```

CMSC 330

47

Defining Your Own Classes

```
class Point
  def initialize(x, y)
    @x = x
    @y = y
  end

  def add_x(x)
    @x += x
  end

  def to_s
    return "(" + @x.to_s + ", " + @y.to_s + ")"
  end
end

p = Point.new(3, 4)
p.add_x(4)
puts(p.to_s)
```

class contains method/
constructor definitions
constructor definition

instance variables prefixed with "@"

method with no arguments

instantiation

invoking no-arg method

CMSC 330

48

No Access To Internal State

- ▶ Instance variables (with `@`) can be directly accessed only by instance methods
- ▶ Outside class, they require **accessors**:

A typical getter

```
def x
  @x
end
```

A typical setter

```
def x=(value)
  @x = value
end
```

- ▶ Very common, so Ruby provides a shortcut

```
class ClassWithXandY
  attr_accessor "x", "y"
end
```

Says to generate the
x= and x and
y= and y methods

CMSC 330

49

No Method Overloading in Ruby

- ▶ Thus there can only be one **initialize** method
 - A typical Java class might have two or more constructors
 - You can code up your own overloading by using a variable number of arguments, and checking at run-time the number/types of arguments
- ▶ Ruby does issue an exception or warning if a class defines more than one **initialize** method
 - But last **initialize** method defined is the valid one

CMSC 330

50

Classes and Objects in Ruby (cont.)

- ▶ Recall classes begin with an uppercase letter
- ▶ **inspect** converts **any** instance to a string

```
irb(main):033:0> p.inspect
=> "#<Point:0x54574 @y=4, @x=7>"
```
- ▶ The **to_s** method can be invoked implicitly
 - Could have written `puts(p)`
 - Like Java's `toString()` methods

CMSC 330

51

Inheritance

- ▶ Recall that every class inherits from **Object**

```
class A      ## < Object
  def add(x)
    return x + 1
  end
end

class B < A
  def add(y)
    return (super(y) + 1)
  end
end

b = B.new
puts(b.add(3))
```

extend superclass

invoke add method of parent

```
b.is_a? A
true
b.instance_of? A
false
```

CMSC 330

52

super() in Ruby

- ▶ Within the body of a method
 - Call to `super( )` acts just like a call to that original method
 - Except that search for method body starts in the superclass of the object that was found to contain the original method

CMSC 330

53

Mixins

- ▶ Another form of code reuse is “mix-in” inclusion
 - `include` A “inlines” A’s methods at that point
 - Referred-to variables/methods captured from context
 - In effect: it adds those methods to the current class

```
class OneDPoint
  attr_accessor "x"
  include Comparable
  def <=>(other) # used by Comparable
    if @x < other.x then return -1
    elsif @x > other.x then return 1
    else return 0
    end
  end
end
```

```
p = OneDPoint.new
p.x = 1
q = OneDPoint.new
q.x = 2
x < y # true
puts [y,x].sort
# prints x, then y
```

CMSC 330 - Fall 2011

54

Global Variables in Ruby

- ▶ Ruby has two kinds of global variables
 - Class variables beginning with `@@` (static in Java)
 - Global variables across classes beginning with `$`

```
class Global
  @@x = 0

  def Global.inc
    @@x = @@x + 1; $x = $x + 1
  end

  def Global.get
    return @@x
  end
end
```

```
$x = 0
Global.inc
$x = $x + 1
Global.inc
puts(Global.get)
puts($x)
```

define a class
("singleton") method

CMSC 330

55

Special Global Variables

- ▶ Ruby has a special set of global variables that are implicitly set by methods
 - ▶ The most insidious one: `$_`
 - Last line of input read by `gets` or `readline`
 - ▶ Example program
- ```
gets # implicitly reads input line into $_
print # implicitly prints out $_
```
- ▶ Using `$_` leads to shorter programs
    - And confusion
    - We suggest you avoid using it

CMSC 330

56

## Creating Strings in Ruby

- ▶ Substitution in double-quoted strings with `#{ }`
  - `course = "330"; msg = "Welcome to #{course}"`
  - `"It is now #{Time.now}"`
  - The contents of `#{ }` may be an arbitrary expression
  - Can also use single-quote as delimiter
    - No expression substitution, fewer escaping characters
- ▶ Here-documents

```
s = <<END
 This is a text message on multiple lines
 and typing \n is annoying
END
```

CMSC 330

57

## Creating Strings in Ruby (cont.)

- ▶ Ruby also has `printf` and `sprintf`
  - `printf("Hello, %s\n", name);`
  - `sprintf("%d: %s", count, Time.now)`
    - Returns a string
- ▶ The `to_s` method returns a `String` representation of a class object

CMSC 330

58

## Standard Library: String

- ▶ The `String` class has many useful methods
  - `s.length` # length of string
  - `s1 == s2` # structural equality (string contents)
  - `s = "A line\n"; s.chomp` # returns "A line"
    - Return new string with s's contents except newline at end of line removed
  - `s = "A line\n"; s.chomp!`
    - Destructively removes newline from `s`
    - *Convention:* methods ending in ! modify the object
    - *Another convention:* methods ending in ? observe the object
  - `"r1\nr2\n\nr4".each_line { |rec| puts rec }`
    - Apply code block to each newline-separated substring

CMSC 330

59

## Standard Library: String (cont.)

- `"hello".index("l", 0)`
  - Return index of the first occurrence of string in `s`, starting at `n`
- `"hello".sub("h", "j")`
  - Replace first occurrence of "h" by "j" in string
  - Use `gsub` ("global" sub) to replace all occurrences
- `"r1\nr2\n\nr3".split("\n")`
  - Return array of substrings delimited by tab
- ▶ Consider these three examples again
  - All involve **searching** in a string for a certain pattern
  - What if we want to find more complicated patterns?
    - Find first occurrence of "a" or "b"
    - Split string at tabs, spaces, and newlines

**Regular  
Expressions!**

CMSC 330


60

## Object Copy vs. Reference Copy


- ▶ Consider the following code
  - Assume an object/reference model like Java or Ruby
    - Or even two pointers pointing to the same structure

```
x = "groundhog" ; y = x
```

- ▶ Which of these occur?



Object copy



Reference copy

CMSC 330

61

## Object Copy vs. Reference Copy (cont.)

- ▶ For 

```
x = "groundhog" ; y = x
```

  - Ruby and Java would both do a reference copy

- ▶ But for 

```
x = "groundhog"
y = String.new(x)
```



- Ruby would cause an object copy
- Unnecessary in Java since Strings are immutable

CMSC 330

62

## Physical vs. Structural Equality

- ▶ Consider these cases again:



- ▶ If we compare `x` and `y`, what is compared?
  - The references, or the contents of the objects they point to?
- ▶ If references are compared (physical equality) the first would return false but the second true
- ▶ If objects are compared both would return true

CMSC 330

63

## String Equality

- ▶ In Java, `x == y` is physical equality, always
  - Compares references, not string contents
- ▶ In Ruby, `x == y` for strings uses structural equality
  - Compares contents, not references
  - `==` is a method that can be overridden in Ruby!
  - To check physical equality, use the `equal?` method
    - Inherited from the `Object` class
- ▶ It's always important to know whether you're doing a reference or object copy
  - And physical or structural comparison

CMSC 330

64

## Comparing Equality

| Language                          | Physical equality        | Structural equality       |
|-----------------------------------|--------------------------|---------------------------|
| <a href="#">Java</a>              | <code>a == b</code>      | <code>a.equals(b)</code>  |
| <a href="#">C</a>                 | <code>a == b</code>      | <code>*a == *b</code>     |
| <a href="#">Ruby</a>              | <code>a.equal?(b)</code> | <code>a == b</code>       |
| <a href="#">Ocaml</a>             | <code>a == b</code>      | <code>a = b</code>        |
| <a href="#">Python</a>            | <code>a is b</code>      | <code>a == b</code>       |
| <a href="#">Scheme</a>            | <code>(eq? a b)</code>   | <code>(equal? a b)</code> |
| <a href="#">Visual Basic .NET</a> | <code>a Is b</code>      | <code>a = b</code>        |

CMSC 330

65

## Summary

- ▶ Scripting languages
- ▶ Ruby language
  - Implicit variable declarations
  - Dynamic typing
  - Many control statements
  - Classes & objects
  - Strings

CMSC 330

66