CMSC 330: Organization of Programming Languages

DFAs, and NFAs, and Regexps

The story so far, and what's next

- Goal: Develop an algorithm that determines whether a string s is matched by regex R
 - I.e., whether s is a member of R's language

- Approach to come: Convert R to a finite automaton FA and see whether s is accepted by FA
 - Details: Convert R to a nondeterministic FA (NFA), which we then convert to a deterministic FA (DFA),
 - which enjoys a fast acceptance algorithm


Two Types of Finite Automata

- Deterministic Finite Automata (DFA)
 - Exactly one sequence of steps for each string
 - > Easy to implement acceptance check
 - (Almost) all examples so far

- Nondeterministic Finite Automata (NFA)
 - May have many sequences of steps for each string
 - Accepts if any path ends in final state at end of string
 - More compact than DFA
 - > But more expensive to test whether a string matches

Comparing DFAs and NFAs

NFAs can have more than one transition leaving a state on the same symbol



- DFAs allow only one transition per symbol
 - I.e., transition function must be a valid function
 - DFA is a special case of NFA


Comparing DFAs and NFAs (cont.)

- NFAs may have transitions with empty string label
 - May move to new state without consuming character




- DFA transition must be labeled with symbol
 - A DFA is a specific kind of NFA

DFA for (a|b)*abb

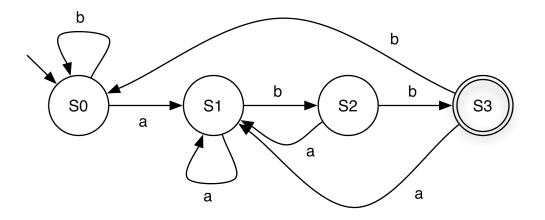


NFA for (a|b)*abb

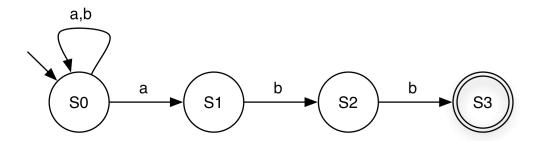


- ▶ ba
 - Has paths to either S0 or S1
 - Neither is final, so rejected
- babaabb
 - Has paths to different states
 - One path leads to S3, so accepts string

NFA for (ab|aba)*

- aba
- ▶ ababa
 - Has paths to states S0, S1
 - Need to use ε-transition

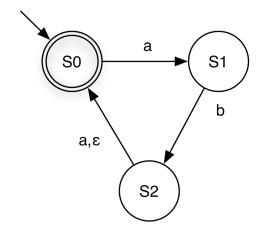


NFA and DFA for (ab|aba)*

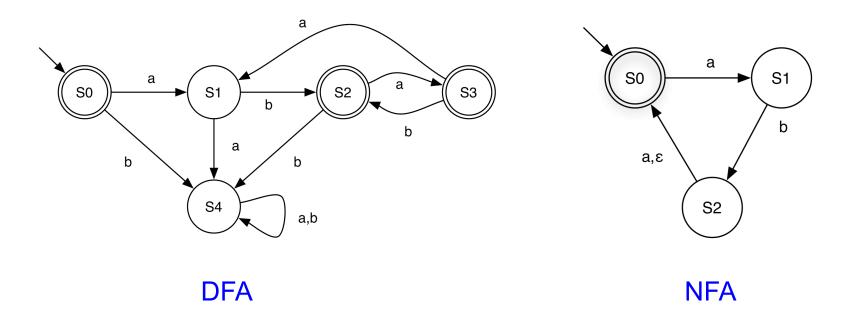


Quiz 1: Which string is **NOT** accepted by this NFA?

- A. ab
- в. abaa
- c. abab
- D. abaab

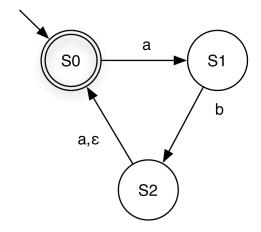

Quiz 1: Which string is **NOT** accepted by this NFA?

- A. ab
- в. abaa
- c. abab
- D. abaab

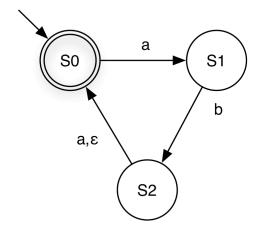


Formal Definition

- A deterministic finite automaton (DFA) is a
 5-tuple (Σ, Q, q₀, F, δ) where
 - Σ is an alphabet
 - Q is a nonempty set of states
 - $q_0 \in Q$ is the start state
 - F ⊆ Q is the set of final states
 - $\delta : Q \times \Sigma \rightarrow Q$ specifies the DFA's transitions
 - \triangleright What's this definition saying that δ is?
- A DFA accepts s if it stops at a final state on s

Formal Definition: Example

- $\Sigma = \{0, 1\}$
- $Q = \{S0, S1\}$
- $q_0 = S0$
- F = {S1}
- $\delta =$


		symbol	
		0	1
input state	S0	S0	S1
input	S1	S0	S1

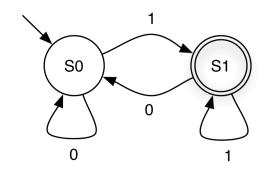

```
or as { (S0,0,S0),
 (S0,1,S1),
 (S1,0,S0),
 (S1,1,S1) }
```

Implementing DFAs (one-off)

It's easy to build a program which mimics a DFA

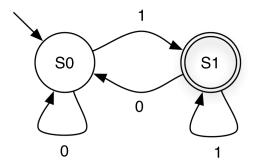

```
cur state = 0;
while (1) {
  symbol = getchar();
  switch (cur state) {
    case 0: switch (symbol) {
              case '0': cur state = 0; break;
              case '1': cur state = 1; break;
              case '\n': printf("rejected\n"); return 0;
                         printf("rejected\n"); return 0;
              default:
            break;
    case 1: switch (symbol) {
              case '0': cur state = 0; break;
              case '1': cur state = 1; break;
              case '\n': printf("accepted\n"); return 1;
              default:
                         printf("rejected\n"); return 0;
            break;
    default: printf("unknown state; I'm confused\n");
             break;
```

CMSC 330 Spring 2021 14

Implementing DFAs (generic)

More generally, use generic table-driven DFA

```
given components (\Sigma, Q, q_0, F, \delta) of a DFA:

let q = q_0

while (there exists another symbol \sigma of the input string)

q := \delta(q, \sigma);

if q \in F then

accept


else reject
```

- q is just an integer
- Represent δ using arrays or hash tables
- Represent F as a set

CMSC 330 Spring 2021 15

Nondeterministic Finite Automata (NFA)

- ▶ An *NFA* is a 5-tuple $(\Sigma, Q, q_0, F, \delta)$ where
 - Σ, Q, q0, F as with DFAs
 - $\delta \subseteq Q \times (\Sigma \cup \{\epsilon\}) \times Q$ specifies the NFA's transitions

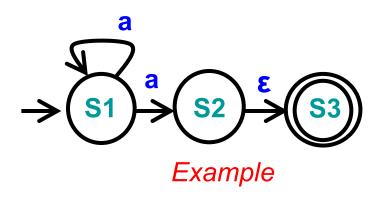

- $\Sigma = \{a\}$
- Q = {S1, S2, S3}
- $q_0 = S1$
- $F = \{S3\}$
- $\delta = \{ (S1,a,S1), (S1,a,S2), (S2,\epsilon,S3) \}$

An NFA accepts s if there is at least one path via s from the NFA's start state to a final state

NFA Acceptance Algorithm (Sketch)


- When NFA processes a string s
 - NFA must keep track of several "current states"
 - > Due to multiple transitions with same label, and ε-transitions
 - If any current state is final when done then accept s
- Example
 - After processing "a"
 - > NFA may be in states

S1

S2

S3


- > Since S3 is final, s is accepted
- Algorithm is slow, space-inefficient; prefer DFAs!

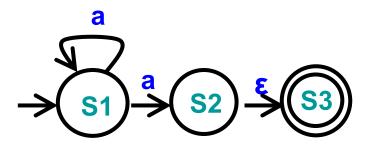

CMSC 330 Spring 2021 17

Relating REs to DFAs and NFAs

Regular expressions, NFAs, and DFAs accept the same languages! Can convert between them

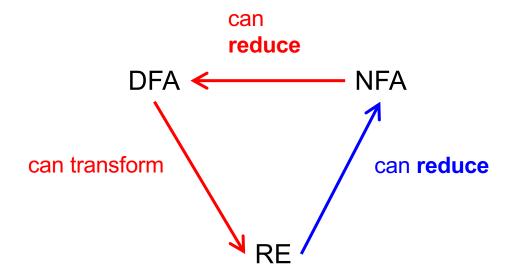


Reducing Regular Expressions to NFAs

- Goal: Given regular expression *A*, construct NFA: $\langle A \rangle = (\Sigma, \mathbb{Q}, \mathbb{q}_0, \mathbb{F}, \delta)$
 - Remember regular expressions are defined recursively from primitive RE languages
 - Invariant: |F| = 1 in our NFAs
 - > Recall F = set of final states
- Will define <A> for base cases: σ, ε, Ø
 - Where σ is a symbol in Σ
- ▶ And for inductive cases: AB, AB, AB, A*

Reducing Regular Expressions to NFAs

Base case: σ




Recall: NFA is $(\Sigma, Q, q_0, F, \delta)$ where Σ is the alphabet Q is set of states q_0 is starting state F is set of final states δ is transition relation

$$\langle \sigma \rangle = (\{\sigma\}, \{S0, S1\}, S0, \{S1\}, \{(S0, \sigma, S1)\})$$

$$(\Sigma, Q, q_0, F, \delta)$$

Reduction

Base case: ε



$$\langle \epsilon \rangle = (\emptyset, \{S0\}, S0, \{S0\}, \emptyset)$$

Recall: NFA is (Σ , Q, q₀, F, δ) where

Σ is the alphabet

Q is set of states

q₀ is starting state

F is set of final states

δ is transition relation

▶ Base case: Ø






$$<\emptyset> = (\emptyset, \{S0, S1\}, S0, \{S1\}, \emptyset)$$

Reduction: Concatenation


▶ Induction: AB

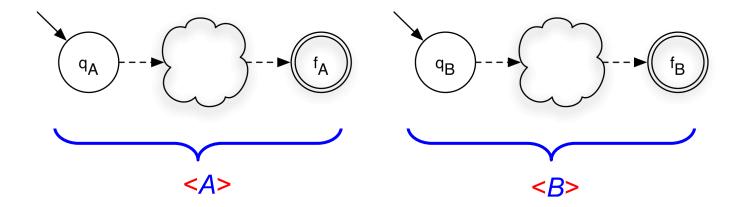

- $\langle A \rangle = (\Sigma_A, Q_A, q_A, \{f_A\}, \delta_A)$
- $\langle B \rangle = (\Sigma_B, Q_B, q_B, \{f_B\}, \delta_B)$

Reduction: Concatenation


▶ Induction: AB

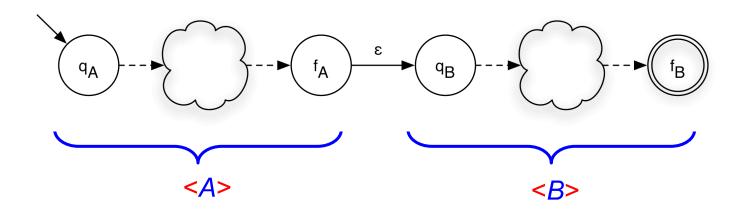


- $<A> = (\Sigma_A, Q_A, q_A, \{f_A\}, \delta_A)$
- $\langle B \rangle = (\Sigma_B, Q_B, q_B, \{f_B\}, \delta_B)$
- $\langle AB \rangle = (\Sigma_A \cup \Sigma_B, Q_A \cup Q_B, q_A, \{f_B\}, \delta_A \cup \delta_B \cup \{(f_A, \epsilon, q_B)\})$

Reduction: Union

▶ Induction: A|B

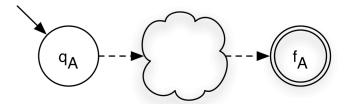


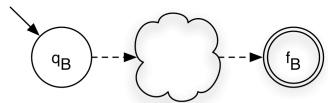

- $\langle A \rangle = (\Sigma_A, Q_A, q_A, \{f_A\}, \delta_A)$
- $\langle B \rangle = (\Sigma_B, Q_B, q_B, \{f_B\}, \delta_B)$

Reduction: Union


▶ Induction: AB

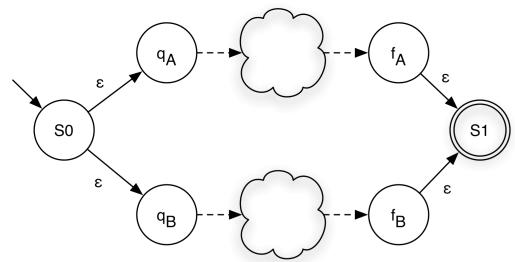

- $\langle A \rangle = (\Sigma_A, Q_A, q_A, \{f_A\}, \delta_A)$
- $\langle B \rangle = (\Sigma_B, Q_B, q_B, \{f_B\}, \delta_B)$
- $<A|B> = (\Sigma_A \cup \Sigma_B, Q_A \cup Q_B \cup \{S0,S1\}, S0, \{S1\}, \delta_A \cup \delta_B \cup \{(S0,\epsilon,q_A), (S0,\epsilon,q_B), (f_A,\epsilon,S1), (f_B,\epsilon,S1)\})$

Reduction: Closure


▶ Induction: A*

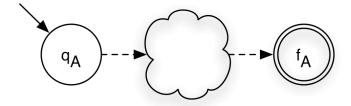

• $\langle A \rangle = (\Sigma_A, Q_A, q_A, \{f_A\}, \delta_A)$


Reduction: Closure

▶ Induction: A*

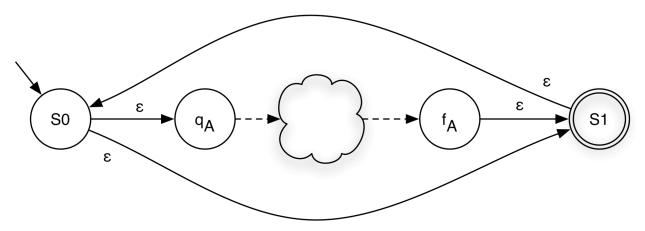


- $\langle A \rangle = (\Sigma_A, Q_A, q_A, \{f_A\}, \delta_A)$
- $<A^*> = (\Sigma_A, Q_A \cup \{S0,S1\}, S0, \{S1\},$ $\delta_A \cup \{(f_A, \epsilon, S1), (S0, \epsilon, q_A), (S0, \epsilon, S1), (S1, \epsilon, S0)\})$


Quiz 2: Which NFA matches a*?

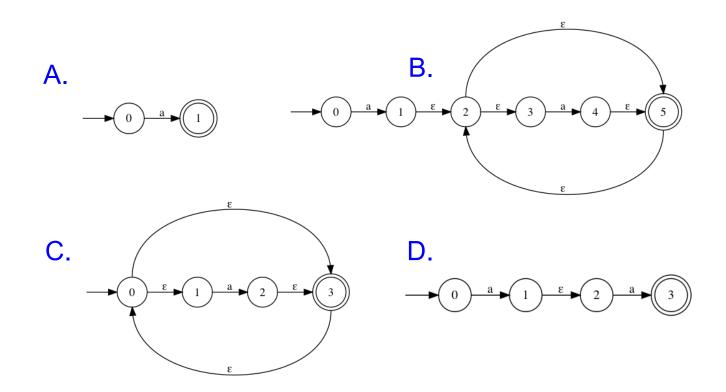


Quiz 2: Which NFA matches a*?

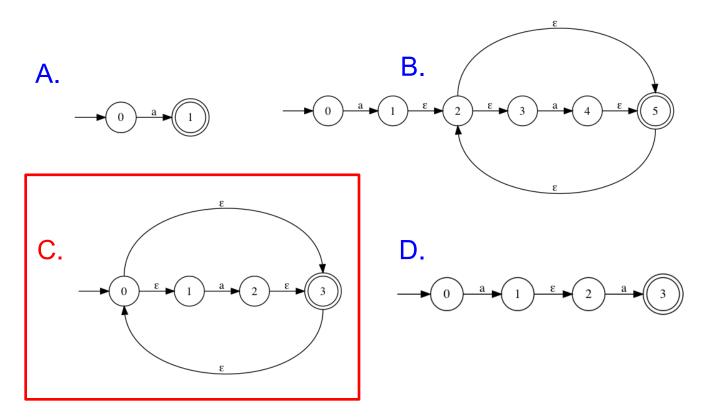

Quiz 3: Which NFA matches a|b*?

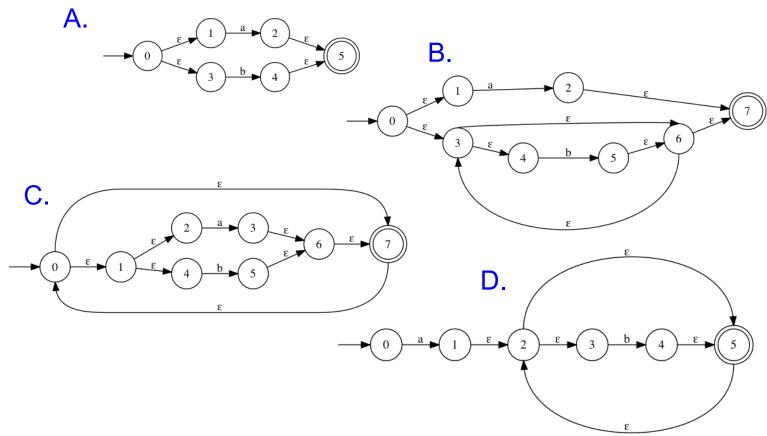


Quiz 3: Which NFA matches a b*?

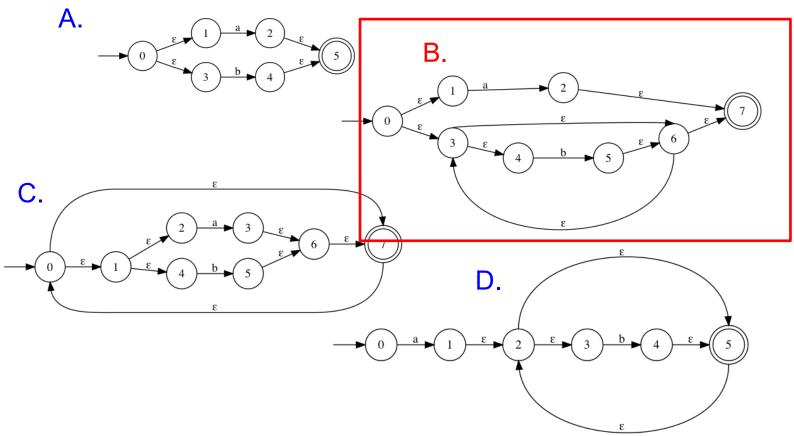


Recap


- Finite automata
 - Alphabet, states...
 - $(\Sigma, Q, q_0, F, \delta)$
- Types

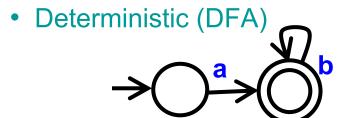


Non-deterministic (NFA)




- Reducing RE to NFA
 - Concatenation



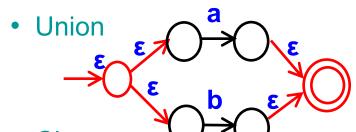

Closure

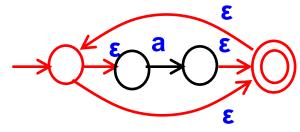

CMSC 330 Spring 2021

33


Reduction Complexity

▶ Given a regular expression A of size n...

```
Size = # of symbols + # of operations
```


- How many states does <A> have?
 - Two added for each |, two added for each *
 - O(n)
 - That's pretty good!


Reducing NFA to DFA

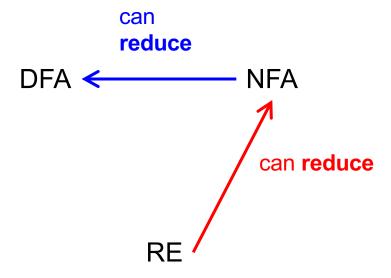

Why NFA → DFA

▶ DFA is generally more efficient than NFA

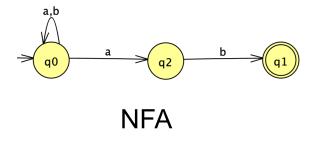

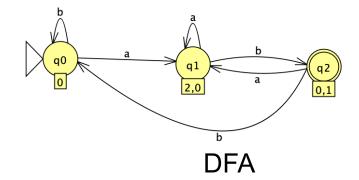

Language: (a|b)*ab


Why NFA → DFA

- DFA has the same expressive power as NFAs.
 - Let language L ⊆ Σ*, and suppose L is accepted by NFA N = (Σ, Q, q₀, F, δ). There exists a DFA D= (Σ, Q', q'₀, F', δ') that also accepts L. (L(N) = L(D))
- NFAs are more flexible and easier to build. But DFAs have no less power than NFAs.

NFA ↔ DFA

Reducing NFA to DFA

- NFA may be reduced to DFA
 - By explicitly tracking the set of NFA states
- Intuition
 - Build DFA where
 - Each DFA state represents a set of NFA "current states"
- Example

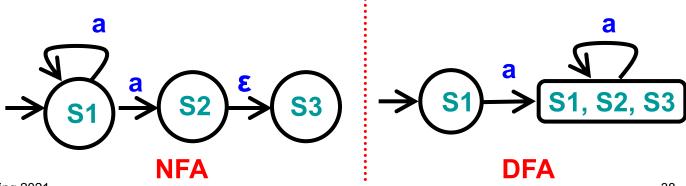

Algorithm for Reducing NFA to DFA

- Reduction applied using the subset algorithm
 - DFA state is a subset of set of all NFA states
- Algorithm
 - Input
 - > NFA (Σ , Q, q₀, F_n, δ)
 - Output
 - \rightarrow DFA (Σ , R, r₀, F_d, δ)
 - Using two subroutines
 - \triangleright ε-closure(δ, p) (and ε-closure(δ, Q))
 - \rightarrow move(δ , p, σ) (and move(δ , Q, σ))
 - (where p is an NFA state)


ε-transitions and ε-closure

- ▶ We say $p \xrightarrow{\epsilon} q$
 - If it is possible to go from state p to state q by taking only $\epsilon\text{-}$ transitions in δ
 - If \exists p, p₁, p₂, ... p_n, q \in Q such that \triangleright {p, ϵ ,p₁} \in δ , {p₁, ϵ ,p₂} \in δ , ..., {p_n, ϵ ,q} \in δ
- ε-closure(δ, p)
 - Set of states reachable from p using ε-transitions alone
 - > Set of states q such that p $\stackrel{\epsilon}{\longrightarrow}$ q according to δ
 - > ε-closure(δ, p) = {q | p $\xrightarrow{\epsilon}$ q in δ }
 - > ε-closure(δ, Q) = { q | p ∈ Q, p $\stackrel{\epsilon}{\rightarrow}$ q in δ }
 - Notes
 - > ε-closure(δ, p) always includes p
 - > We write ε-closure(p) or ε-closure(Q) when δ is clear from context

ε-closure: Example 1

Following NFA contains

- p1 $\stackrel{\epsilon}{\rightarrow}$ p2
- p2 $\stackrel{\varepsilon}{\rightarrow}$ p3
- p1 $\stackrel{\epsilon}{\rightarrow}$ p3
 - > Since p1 $\stackrel{\varepsilon}{\rightarrow}$ p2 and p2 $\stackrel{\varepsilon}{\rightarrow}$ p3

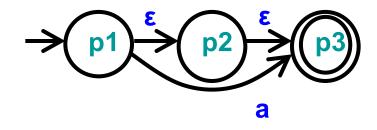

ε-closures


- ε-closure(p1) =
- ϵ -closure(p2) =
- ϵ -closure(p3) =
- ε-closure({ p1, p2 }) =

```
{ p1, p2, p3 }
{ p2, p3 }
{ p3 }
{ p1, p2, p3 } \cup { p2, p3 }
```

ε-closure: Example 2

Following NFA contains

- p1 $\stackrel{\epsilon}{\rightarrow}$ p3
- p3 $\stackrel{\varepsilon}{\rightarrow}$ p2
- $p1 \xrightarrow{\epsilon} p2$
 - > Since p1 $\stackrel{\epsilon}{\rightarrow}$ p3 and p3 $\stackrel{\epsilon}{\rightarrow}$ p2

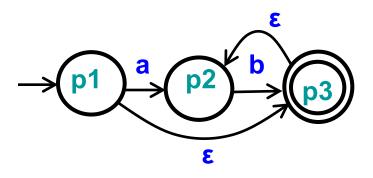

ε-closures

- ε-closure(p1) =
- ϵ -closure(p2) =
- ϵ -closure(p3) =
- ε-closure({ p2,p3 }) =

```
{ p1, p2, p3 }
{ p2 }
{ p2, p3 }
{ p2 } ∪ { p2, p3 }
```

ε-closure Algorithm: Approach

▶ Input: NFA (Σ , Q, q₀, F_n, δ), State Set R

Output: State Set R'


► Algorithm


```
Let R' = R // start states 
Repeat // continue from previous 
Let R' = R \cup {q | p \in R, (p, \epsilon, q) \in \delta} // new \epsilon-reachable states 
Until R = R' // stop when no new states
```

This algorithm computes a fixed point

ε-closure Algorithm Example

► Calculate ε-closure(δ,{p1})

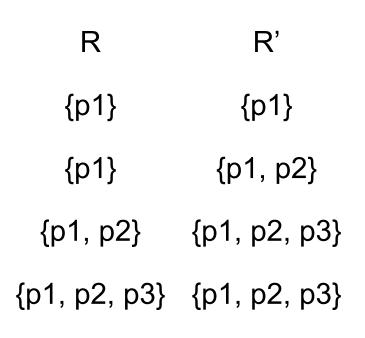

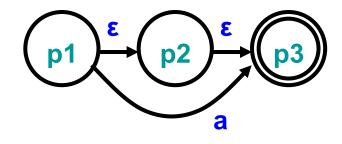

```
Let R' = R 
Repeat 
 Let R= R' 
 Let R' = R \cup {q | p \in R, (p, \epsilon, q) \in \delta} 
Until R = R'
```

Calculating move(p,σ)

- move(δ ,p, σ)
 - Set of states reachable from p using exactly one transition on symbol σ
 - > Set of states q such that $\{p, \sigma, q\} \in \delta$
 - > move(δ, p, σ) = { q | {p, σ, q } $\in \delta$ }
 - \rightarrow move(δ ,Q, σ) = { q | p \in Q, {p, σ , q} \in δ }
 - i.e., can "lift" move() to a set of states Q
 - Notes:
 - \rightarrow move(δ ,p, σ) is \emptyset if no transition (p, σ ,q) $\in \delta$, for any q
 - \triangleright We write move(p, σ) or move(R, σ) when δ clear from context

$move(p,\sigma)$: Example 1

Following NFA

•
$$\Sigma = \{ a, b \}$$

Move

move(p1, a) = { p2, p3 }
move(p1, b) = Ø
move(p2, a) = Ø
move(p2, b) = { p3 }
move(p3, a) = Ø
move(p3, b) = Ø

$$\begin{array}{c|c}
 & p1 \\
\hline
 & p2 \\
\hline
 & p3 \\
\hline
 & a
\end{array}$$


$$move(\{p1,p2\},b) = \{p3\}$$

$move(p,\sigma)$: Example 2

Following NFA

•
$$\Sigma = \{ a, b \}$$

Move

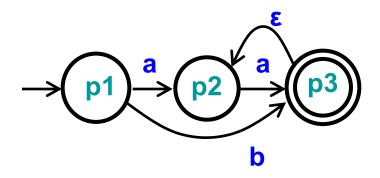

$$move(\{p1,p2\},a) = \{p2,p3\}$$

NFA → DFA Reduction Algorithm ("subset")


- ▶ Input NFA (Σ , Q, q₀, F_n, δ), Output DFA (Σ , R, r₀, F_d, δ ')
- Algorithm

```
Let r_0 = \varepsilon-closure(\delta, q_0), add it to R
                                                           // DFA start state
While \exists an unmarked state r \in R
                                                           // process DFA state r
     Mark r
                                                           // each state visited once
     For each \sigma \in \Sigma
                                                           // for each symbol σ
          Let E = move(\delta,r,\sigma)
                                                           // states reached via σ
          Let e = \varepsilon-closure(\delta,E)
                                                           // states reached via ε
          If e ∉ R
                                                           // if state e is new
                Let R = R \cup \{e\}
                                                           // add e to R (unmarked)
          Let \delta' = \delta' \cup \{r, \sigma, e\}
                                                           // add transition r→e on σ
Let F_d = \{r \mid \exists s \in r \text{ with } s \in F_n\}
                                                           // final if include state in F<sub>n</sub>
```


NFA → DFA Example

- Start = ε -closure(δ ,p1) = { {p1,p3} }
- $R = \{ \{p1,p3\} \}$
- $r \in R = \{p1,p3\}$
- $move(\delta, \{p1, p3\}, a) = \{p2\}$
 - \triangleright e = ε -closure(δ ,{p2}) = {p2}
 - \Rightarrow R = R \cup {{p2}} = { {p1,p3}, {p2} }
 - $> \delta' = \delta' \cup \{\{p1,p3\}, a, \{p2\}\}\}$
- $move(\delta, \{p1, p3\}, b) = \emptyset$

NFA

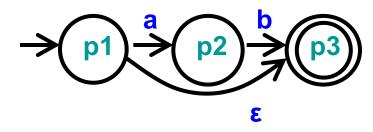


DFA



NFA → DFA Example (cont.)

- $R = \{ \{p1,p3\}, \{p2\} \}$
- $r \in R = \{p2\}$
- move(δ ,{p2},a) = Ø
- $move(\delta, \{p2\}, b) = \{p3\}$
 - \triangleright e = ε -closure(δ ,{p3}) = {p3}
 - \Rightarrow R = R \cup {{p3}} = { {p1,p3}, {p2}, {p3} }
 - $> \delta' = \delta' \cup \{\{p2\}, b, \{p3\}\}\}$

NFA

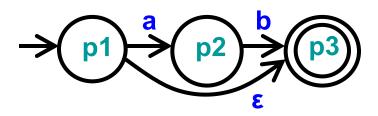

DFA




CMSC 330 \$1/mme62020 50

NFA → DFA Example (cont.)

- R = { {p1,p3}, {p2}, {p3} }
- $r \in R = \{p3\}$
- Move($\{p3\},a$) = Ø
- Move($\{p3\},b$) = \emptyset
- Mark {p3}, exit loop
- $F_d = \{\{p1,p3\}, \{p3\}\}\$ > Since $p3 \in F_n$
- Done!

NFA

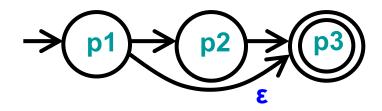


DFA




NFA → DFA Example 2

NFA


DFA

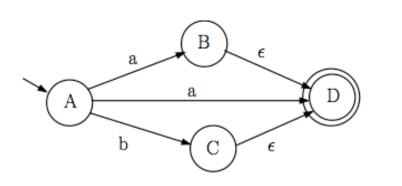


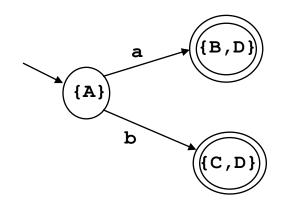



$$R = \{ \{A\}, \{B,D\}, \{C,D\} \}$$

Quiz 4: Which DFA is equiv to this NFA?

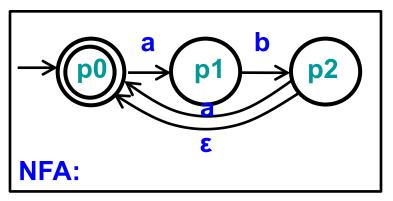

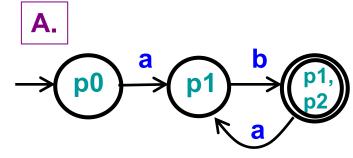

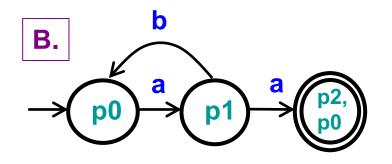


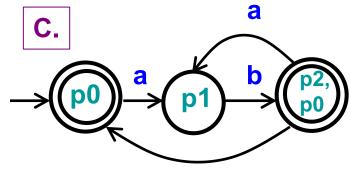

D. None of the above


b


Quiz 4: Which DFA is equiv to this NFA?

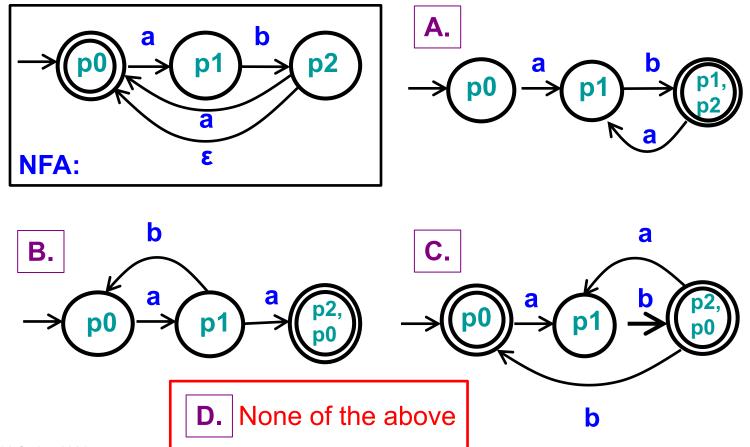


CMSC 330 Spring 2021

Actual Answer

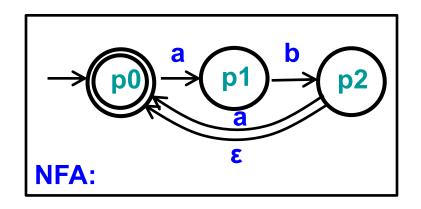


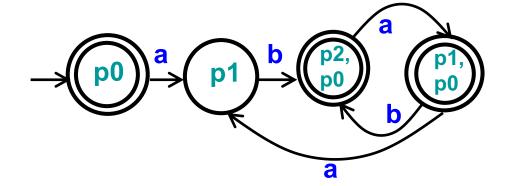

NFA → DFA Example 3

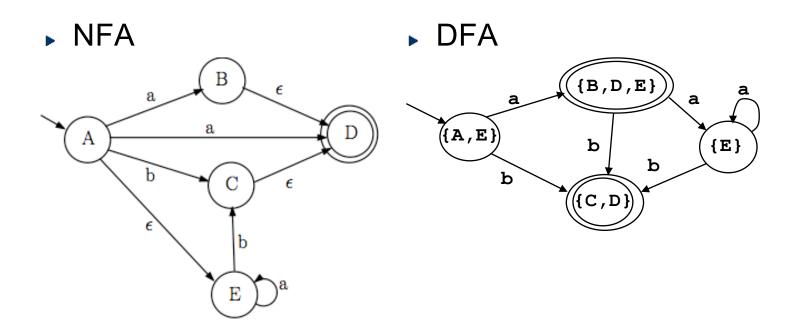

$$R = \{ \{A,E\}, \{B,D,E\}, \{C,D\}, \{E\} \} \}$$

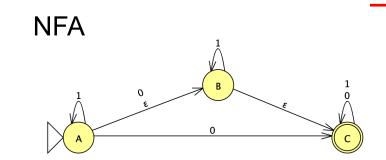

DFA



New Start State

```
Let r_0 = \epsilon-closure(\delta, q_0), add it to R

While \exists an unmarked state r \in R

Mark r

For each \sigma \in \Sigma

Let E = move(\delta, r, \sigma)


Let e = \epsilon-closure(\delta, E)


If e \notin R

Let R = R \cup \{e\}

Let \delta' = \delta' \cup \{r, \sigma, e\}

Let F_d = \{r \mid \exists \ s \in r \ with \ s \in F_n\}
```

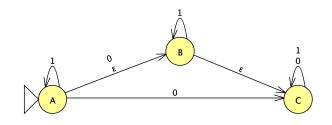



Let $r_0 = \varepsilon$ -closure(δ, q_0), add it to R

While \exists an unmarked state $r \in R$

For each
$$\sigma \in \Sigma$$
 //0

Let $E = move(\delta, r, \sigma)$


Let $e = \varepsilon$ -closure(δ, E)


If $e \notin R$

Let $R = R \cup \{e\}$

Let $\delta' = \delta' \cup \{r, \sigma, e\}$

Let $F_d = \{r \mid \exists \ s \in r \ with \ s \in F_n\}$

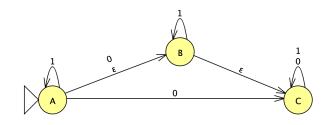

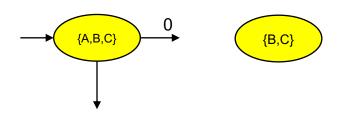

	0	1
{A,B,C}	{B,C}	

```
Let r_0 = \epsilon-closure(\delta, q_0), add it to R

While \exists an unmarked state r \in R

Mark r


For each \sigma \in \Sigma


Let E = move(\delta, r, \sigma)

Let e = \epsilon-closure(\delta, E)

If e \notin R

Let e \in R
```

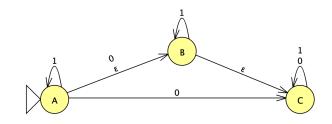

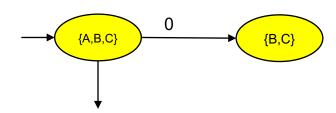

	0	1
{A,B,C}	{B,C}	
{B,C}		

```
Let r_0 = \epsilon-closure(\delta, q_0), add it to R

While \exists an unmarked state r \in R

Mark r

For each \sigma \in \Sigma

Let E = move(\delta, r, \sigma)


Let e = \epsilon-closure(\delta, E)


If e \notin R

Let R = R \cup \{e\}

Let \delta' = \delta' \cup \{r, \sigma, e\}

Let F_d = \{r \mid \exists \ s \in r \ with \ s \in F_n\}
```

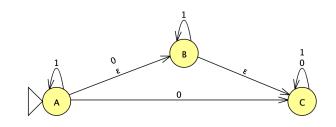

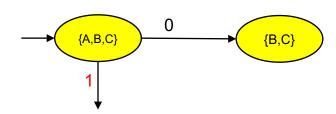

	0	1
{A,B,C}	{B,C}	
{B,C}		

Let $r_0 = \varepsilon$ -closure(δ, q_0), add it to R

While \exists an unmarked state $r \in R$

```
For each \sigma \in \Sigma //1

Let E = move(\delta, r, \sigma)


Let e = \epsilon-closure(\delta, E)


If e \notin R

Let R = R \cup {e}

Let \delta' = \delta' \cup \{r, \sigma, e\}

Let F_d = \{r \mid \exists \ s \in r \ with \ s \in F_n\}
```

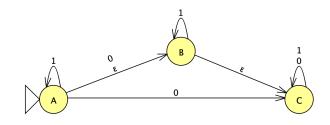

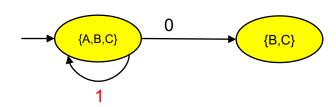

	0	1
{A,B,C}	{B,C}	{A,B,C}
{B,C}		

```
Let r_0 = \epsilon-closure(\delta,q_0), add it to R

While \exists an unmarked state r \in R

Mark r

For each \sigma \in \Sigma //1

Let E = move(\delta, r, \sigma)


Let e = \epsilon-closure(\delta, E)


If e \notin R

Let R = R \cup \{e\}

Let \delta' = \delta' \cup \{r, \sigma, e\}

Let F_d = \{r \mid \exists \ s \in r \ with \ s \in F_n\}
```

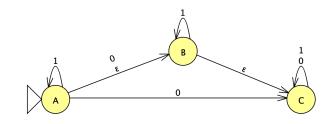

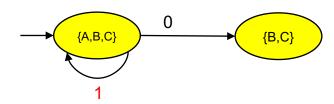

	0	1
{A,B,C}	{B,C}	{A,B,C}
{B,C}		

```
Let r_0 = \epsilon-closure(\delta,q<sub>0</sub>), add it to R

While \exists an unmarked state r \in R

Mark r

For each \sigma \in \Sigma //1

Let E = move(\delta, r, \sigma)


Let e = \epsilon-closure(\delta,E)


If e \notin R

Let R = R \cup \{e\}

Let \delta' = \delta' \cup \{r, \sigma, e\}

Let F_d = \{r \mid \exists \ s \in r \ with \ s \in F_n\}
```

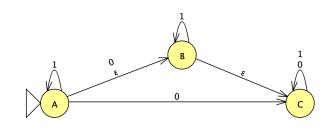

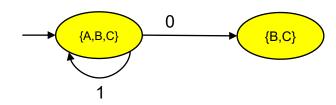

```
0 1
{A,B,C} {B,C} {A,B,C}
```

```
Let r_0 = \epsilon\text{-closure}(\delta, q_0), add it to R

While \exists an unmarked state r \in R

Mark r

For each \sigma \in \Sigma //1

Let E = \text{move}(\delta, r, \sigma)


Let e = \epsilon\text{-closure}(\delta, E)


If e \notin R

Let R = R \cup \{e\}


Let \delta' = \delta' \cup \{r, \sigma, e\}


Let F_d = \{r \mid \exists \ s \in r \ \text{with} \ s \in F_n\}
```

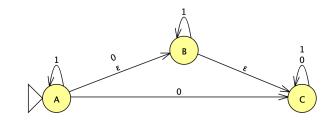

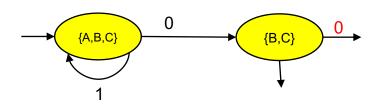



Let $r_0 = \varepsilon$ -closure(δ, q_0), add it to R While \exists an unmarked state $r \in R$ Mark r For each $\sigma \in \Sigma$ //0 Let E = move(δ ,r, σ) Let $e = \varepsilon$ -closure(δ ,E) If e ∉ R Let $R = R \cup \{e\}$ Let $\delta' = \delta' \cup \{r, \sigma, e\}$ Let $F_d = \{r \mid \exists s \in r \text{ with } s \in F_n\}$

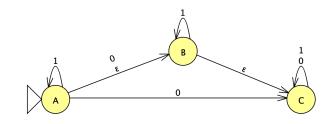

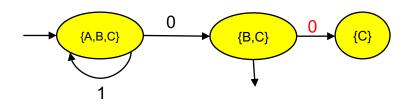

Let $r_0 = \epsilon$ -closure(δ, q_0), add it to R While \exists an unmarked state $r \in R$ Mark rFor each $\sigma \in \Sigma$ //0 Let $E = move(\delta, r, \sigma)$ Let $e = \epsilon$ -closure(δ, E) If $e \notin R$ Let $R = R \cup \{e\}$ Let $\delta' = \delta' \cup \{r, \sigma, e\}$ Let $F_d = \{r \mid \exists \ s \in r \ with \ s \in F_n\}$

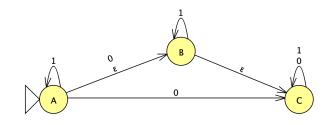

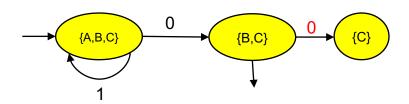

	0	1
{A,B,C}	{B,C}	{A,B,C}
{B,C}	{C}	
{C}		

```
Let r_0 = \epsilon-closure(\delta, q_0), add it to R

While \exists an unmarked state r \in R

Mark r

For each \sigma \in \Sigma //0

Let E = move(\delta, r, \sigma)


Let e = \epsilon-closure(\delta, E)


If e \notin R

Let R = R \cup \{e\}

Let \delta' = \delta' \cup \{r, \sigma, e\}

Let F_d = \{r \mid \exists \ s \in r \ with \ s \in F_n\}
```

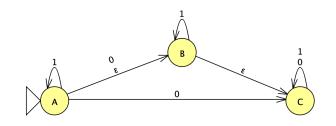

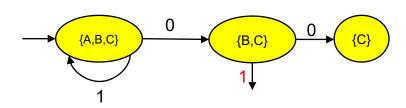

	0	1
{A,B,C}	{B,C}	{A,B,C}
{B,C}	{C}	?
{C}		

```
Let r_0 = \epsilon-closure(\delta, q_0), add it to R

While \exists an unmarked state r \in R

Mark r

For each \sigma \in \Sigma //1

Let E = move(\delta, r, \sigma)


Let e = \epsilon-closure(\delta, E)


If e \notin R

Let R = R \cup \{e\}

Let \delta' = \delta' \cup \{r, \sigma, e\}

Let F_d = \{r \mid \exists \ s \in r \ with \ s \in F_n\}
```

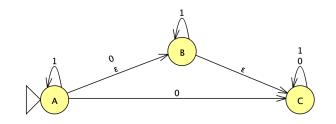

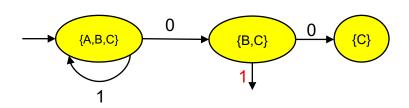

	0	1
{A,B,C}	{B,C}	{A,B,C}
{B,C}	{C}	{B,C}
{C}		

```
Let r_0 = \epsilon-closure(\delta, q_0), add it to R

While \exists an unmarked state r \in R

Mark r

For each \sigma \in \Sigma //1

Let E = move(\delta, r, \sigma)


Let e = \epsilon-closure(\delta, E)


If e \notin R

Let R = R \cup \{e\}

Let \delta' = \delta' \cup \{r, \sigma, e\}

Let F_d = \{r \mid \exists \ s \in r \ with \ s \in F_n\}
```

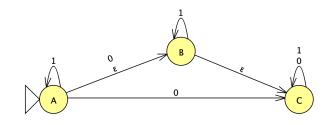

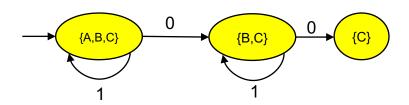

	0	1
{A,B,C}	{B,C}	{A,B,C}
{B,C}	{C}	{B,C}
{C}		

```
Let r_0 = \epsilon\text{-closure}(\delta, q_0), add it to R

While \exists an unmarked state r \in R

Mark r

For each \sigma \in \Sigma //1

Let E = \text{move}(\delta, r, \sigma)


Let e = \epsilon\text{-closure}(\delta, E)


If e \notin R

Let R = R \cup \{e\}

Let \delta' = \delta' \cup \{r, \sigma, e\}

Let F_d = \{r \mid \exists \ s \in r \ \text{with} \ s \in F_n\}
```

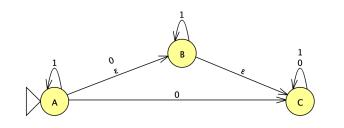


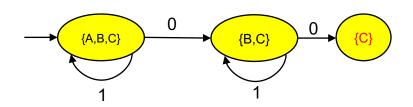


	0	1
{A,B,C}	{B,C}	{A,B,C}
{B,C}	{C}	{B,C}
{C}		

Let $r_0 = \varepsilon$ -closure(δ, q_0), add it to R

While \exists an unmarked state $r \in R$

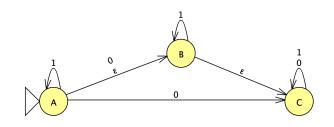

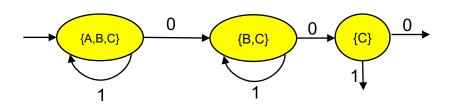

	0	1
{A,B,C}	{B,C}	{A,B,C}
{B,C}	{C}	{B,C}
{C}		

Let $r_0 = \varepsilon$ -closure(δ, q_0), add it to R

While \exists an unmarked state $r \in R$ Mark r


For each
$$\sigma \in \Sigma$$


Let E = move(δ ,r, σ)

Let
$$e = \varepsilon$$
-closure(δ ,E)
If $e \notin R$
Let $R = R \cup \{e\}$

Let $\delta' = \delta' \cup \{r, \sigma, e\}$

Let
$$F_d = \{r \mid \exists \ s \in r \text{ with } s \in F_n\}$$

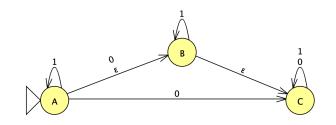

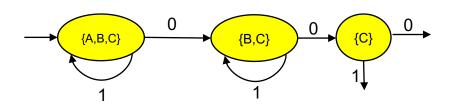

	0	1
{A,B,C}	{B,C}	{A,B,C}
{B,C}	{C}	{B,C}
{C}	{C}	

Let $r_0 = \varepsilon$ -closure(δ, q_0), add it to R

While \exists an unmarked state $r \in R$

For each
$$\sigma \in \Sigma$$
 //0


Let E = move(
$$\delta$$
,r, σ)


Let e = ε-closure(
$$\delta$$
,E)

Let
$$R = R \cup \{e\}$$

Let
$$\delta' = \delta' \cup \{r, \sigma, e\}$$

Let
$$F_d = \{r \mid \exists \ s \in r \text{ with } s \in F_n\}$$

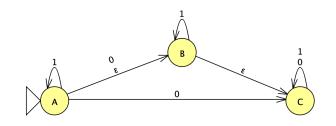

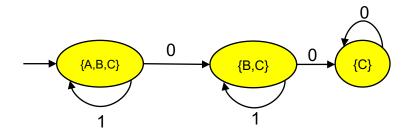

	0	1
{A,B,C}	{B,C}	{A,B,C}
{B,C}	{C}	{B,C}
{C}	{C}	

```
Let r_0 = \epsilon-closure(\delta,q<sub>0</sub>), add it to R

While \exists an unmarked state r \in R

Mark r

For each \sigma \in \Sigma //0

Let E = move(\delta, r, \sigma)


Let e = \epsilon-closure(\delta,E)


If e \notin R

Let R = R \cup \{e\}

Let \delta' = \delta' \cup \{r, \sigma, e\}

Let F_d = \{r \mid \exists \ s \in r \ with \ s \in F_n\}
```

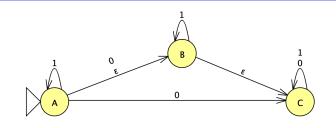


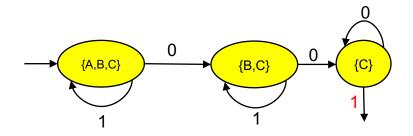


	0	1
{A,B,C}	{B,C}	{A,B,C}
{B,C}	{C}	{B,C}
{C}	{C}	

Let $r_0 = \epsilon$ -closure(δ, q_0), add it to R While \exists an unmarked state $r \in R$ Mark rFor each $\sigma \in \Sigma$ //1 Let $E = move(\delta, r, \sigma)$ Let $e = \epsilon$ -closure(δ, E) If $e \notin R$ Let $R = R \cup \{e\}$ Let $\delta' = \delta' \cup \{r, \sigma, e\}$

Let $F_d = \{r \mid \exists s \in r \text{ with } s \in F_n\}$

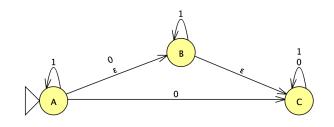

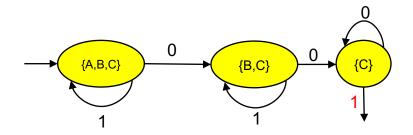

	0	1
{A,B,C}	{B,C}	{A,B,C}
{B,C}	{C}	{B,C}
{C}	{C}	{C}

```
Let r_0 = \epsilon-closure(\delta, q_0), add it to R

While \exists an unmarked state r \in R

Mark r

For each \sigma \in \Sigma //1

Let E = move(\delta, r, \sigma)


Let e = \epsilon-closure(\delta, E)


If e \notin R

Let R = R \cup \{e\}

Let \delta' = \delta' \cup \{r, \sigma, e\}
```


Let $F_d = \{r \mid \exists s \in r \text{ with } s \in F_n\}$

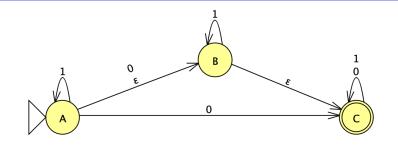

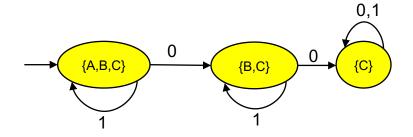

	0	1
{A,B,C}	{B,C}	{A,B,C}
{B,C}	{C}	{B,C}
{C}	{C}	{C}

Let $r_0 = \epsilon$ -closure(δ, q_0), add it to R While \exists an unmarked state $r \in R$ Mark rFor each $\sigma \in \Sigma$ //1 Let $E = move(\delta, r, \sigma)$ Let $e = \epsilon$ -closure(δ, E) If $e \notin R$ Let $R = R \cup \{e\}$ Let $\delta' = \delta' \cup \{r, \sigma, e\}$ Let $F_d = \{r \mid \exists \ s \in r \ with \ s \in F_n\}$

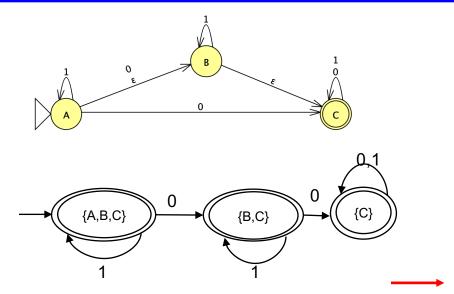

	0	1
{A,B,C}	{B,C}	{A,B,C}
{B,C}	{C}	{B,C}
{C}	{C}	{C}

Let $r_0 = \varepsilon$ -closure(δ, q_0), add it to R

While \exists an unmarked state $r \in R$ Mark r

For each
$$\sigma \in \Sigma$$
 //1

Let E = move(δ ,r, σ)

Let e = ϵ -closure(δ ,E)


If e \notin R

Let R = R \cup {e}


Let δ ' = δ ' \cup {r, σ , e}

Let
$$F_d = \{r \mid \exists \ s \in r \text{ with } s \in F_n\}$$


Detailed NFA → DFA Example: Completed

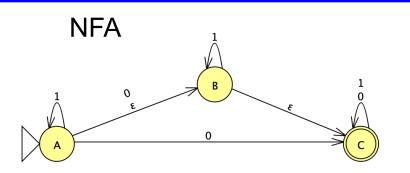


	0	1
{A,B,C}	{B,C}	{A,B,C}
{B,C}	{C}	{B,C}
{C}	{C}	{C}

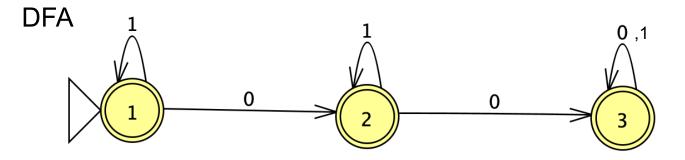


NFA → DFA Example

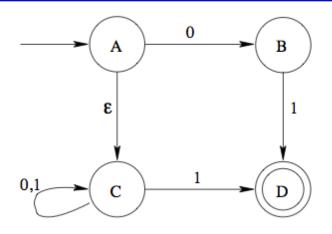


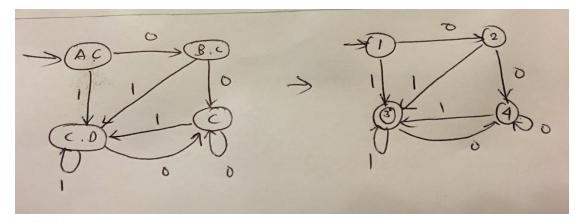

Analyzing the Reduction

- Can reduce any NFA to a DFA using subset alg.
- How many states in the DFA?
 - Each DFA state is a subset of the set of NFA states
 - Given NFA with n states, DFA may have 2ⁿ states
 - > Since a set with n items may have 2ⁿ subsets
 - Corollary
 - Reducing a NFA with n states may be O(2ⁿ)



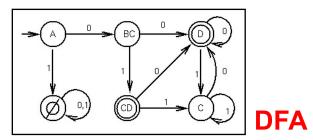


83

Recap: Matching a Regexp R

- ▶ Given R, construct NFA. Takes time O(R)
- ▶ Convert NFA to DFA. Takes time $O(2^{|R|})$
 - But usually not the worst case in practice
- Use DFA to accept/reject string s
 - Assume we can compute $\delta(q,\sigma)$ in constant time
 - Then time to process s is O(|s|)
 - Can't get much faster!
- Constructing the DFA is a one-time cost
 - But then processing strings is fast


Closing the Loop: Reducing DFA to RE

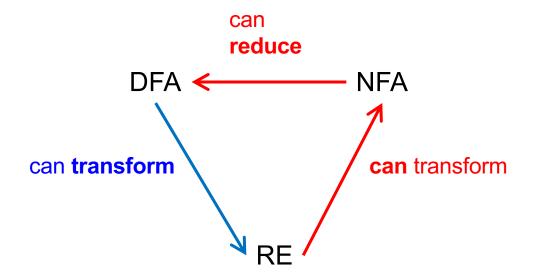

Reducing DFAs to REs


General idea


- Remove states one by one, labeling transitions with regular expressions
- When two states are left (start and final), the transition label is the regular expression for the DFA

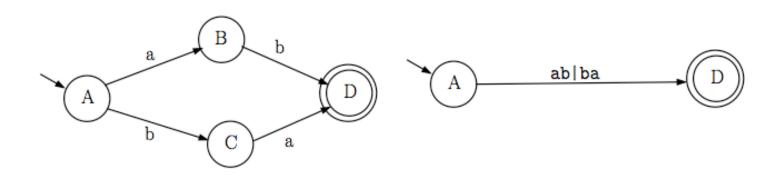



DFA to RE example

Language over $\Sigma = \{0,1\}$ such that every string is a multiple of 3 in binary

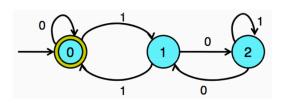

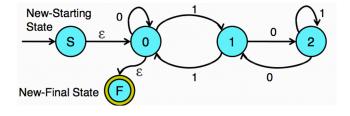


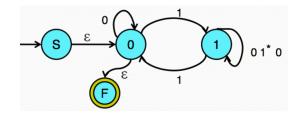



Minimizing DFAs

- Every regular language is recognizable by a unique minimum-state DFA
 - Ignoring the particular names of states
- In other words
 - For every DFA, there is a unique DFA with minimum number of states that accepts the same language

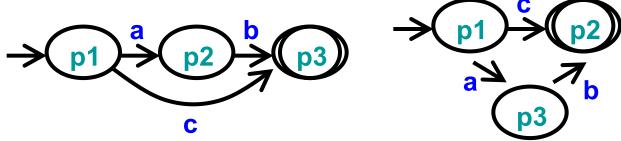

Minimizing DFA: Hopcroft Reduction

Intuition


- Look to distinguish states from each other
 - > End up in different accept / non-accept state with identical input

Algorithm

- Construct initial partition
 - Accepting & non-accepting states
- Iteratively split partitions (until partitions remain fixed)
 - Split a partition if members in partition have transitions to different partitions for same input
 - Two states x, y belong in same partition if and only if for all symbols in Σ they transition to the same partition
- Update transitions & remove dead states


Splitting Partitions

- No need to split partition {S,T,U,V}
 - All transitions on a lead to identical partition P2
 - Even though transitions on a lead to different states

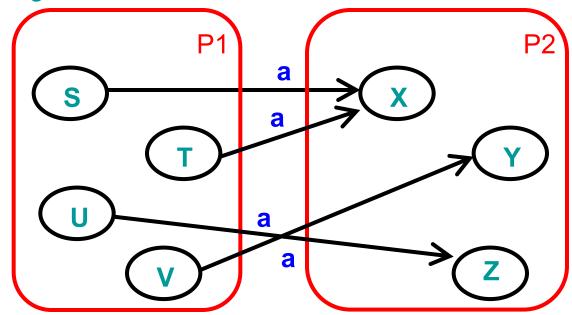


Splitting Partitions (cont.)

- ▶ Need to split partition {S,T,U} into {S,T}, {U}
 - Transitions on a from S,T lead to partition P2
 - Transition on a from U lead to partition P3

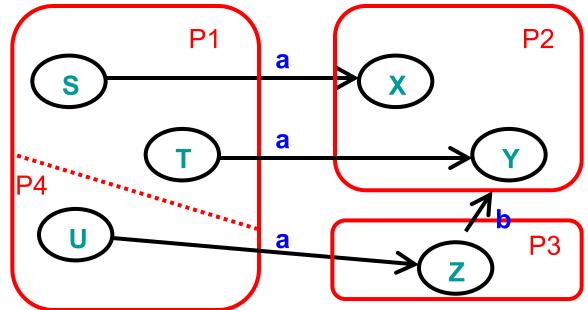


Resplitting Partitions

- Need to reexamine partitions after splits
 - Initially no need to split partition {S,T,U}
 - After splitting partition {X,Y} into {X}, {Y} we need to split partition {S,T,U} into {S,T}, {U}

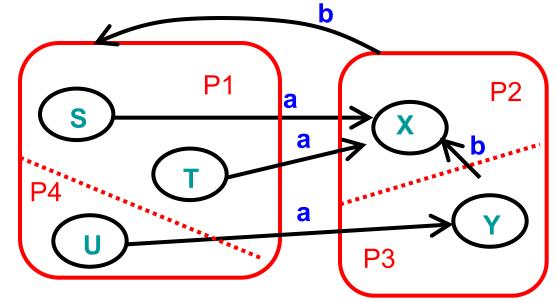

CMSC 330 Spring 2021


DFA

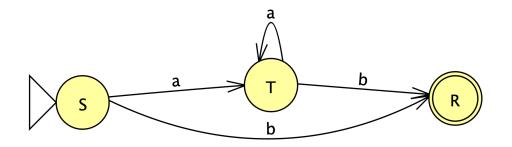

Initial partitions

Split partition

DFA

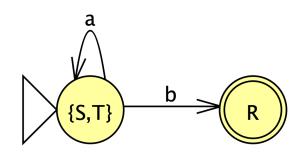

- Initial partitions
 - Accept

$$\{R\} = P1$$


Reject

- $\{S,T\}=P2$
- Split partition?


- → Not required, minimization done
- $move(S,a) = T \in P2$

 $- \text{move}(S,b) = R \in P1$

- $move(T,a) = T \in P2$ $move(T,b) = R \in P1$

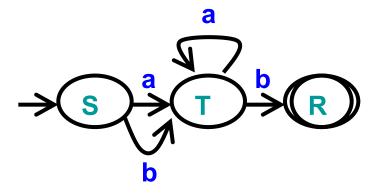

DFA

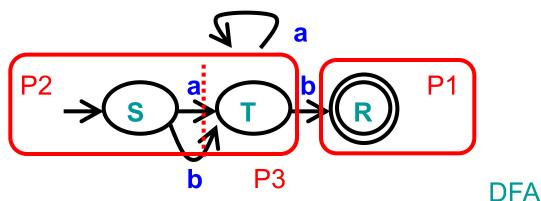

- Initial partitions
 - Accept { R }= P1
 - Reject { S, T } = P2
- ▶ Split partition? → Yes, different partitions for B
 - $move(S,a) = T \in P2$ $move(S,b) = T \in P2$
 - $move(T,a) = T \in P2$ $move(T,b) = R \in P1$

CMSC 330 Spring 2021


already

minimal

Brzozowski's Algorithm: DFA Minimization

- Given a DFA, reverse all the edges, make the initial state an accept state, and the accept states initial, to get an NFA
- 2. NFA-> DFA
- 3. For the new DFA, reverse the edges (and initial-accept swap) get an NFA
- 4. NFA -> DFA


Brzozowski's algorithm

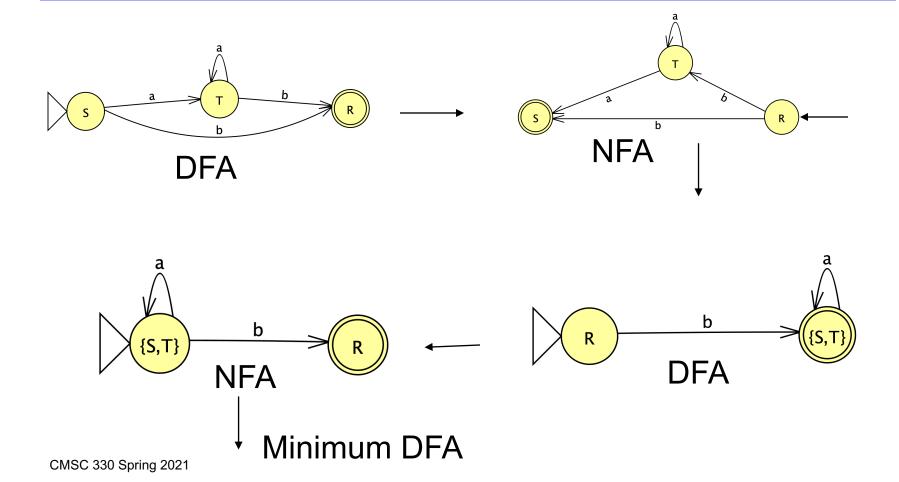

Complement of DFA


- Given a DFA accepting language L
 - How can we create a DFA accepting its complement?
 - Example DFA

$$\triangleright \Sigma = \{a,b\}$$

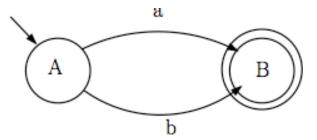

Complement of DFA

- Algorithm
 - Add explicit transitions to a dead state
 - Change every accepting state to a non-accepting state & every non-accepting state to an accepting state
- Note this only works with DFAs
 - Why not with NFAs?

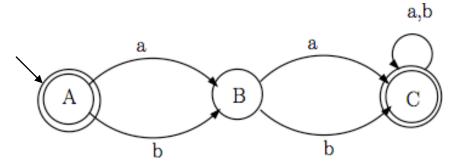

Summary of Regular Expression Theory

- Finite automata
 - DFA, NFA
- Equivalence of RE, NFA, DFA
 - RE → NFA
 - > Concatenation, union, closure
 - NFA → DFA
 - > ε-closure & subset algorithm
- DFA
 - Minimization, complementation